

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE HOIST

0.5-01/01-01/02-01/03-01 Low Lifting Hoist

ISO9001 Supplier

Class Certificate

Export Supply

0.5-01/01-01/02-01/03-01 Low Lifting Hoist Technical Parameters: Type Capacity(Ton)
Lifting Height (m) Lifting S...



Key Highlights

Category	Marine Hoist
Standard	EN
Weight / Size	Type Capacity(Ton) Lifting Height (m) Lifting Speed (m/min) Lifting Mote...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.




Technical Specifications			
Category	Marine Hoist	Model / SKU	0-5-01-01-01-02-01-03-01-Low-Lifting-Hoist
Standard	EN	Weight / Size	Type Capacity(Ton) Lifting Height (m) Lifting Speed (m/min) Lifting Moter Operating Moter Power(kw) Rotation speed(r/min) Phases voltage(v) Frequency(Hz) Power(kw) Rotation speed(r/min) Phases voltage(v) Frequency(Hz) HHBBL0.5 - 01 0.5 3/9 7.2 1.1 1440 3 220-440 50/60 0.2 1440 3 220-440 50/60 HHBBL01 - 02 1 3/9 3.6 1.1 1440 3 220-440 50/60 0.4 1440 3 220-440 50/60 HHBBL01 - 01 1 3/9 6.8 1.5 1440 3 220-440 50/60 0.4 1440 3 220-440 50/60 HHBBL02 - 02 2 3/9 3.4 1.5 1440 3 220-440 50/60 0.4 1440 3 220-440 50/60 HHBBL02 - 01 2 3/9 6.6 3 1440 3 220-440 50/60 0.4 1440 3 220-440 50/60 HHBBL03 - 03 3 3/9 2.2 1.5 1440 3 220-440 50/60 0.75 1440 3 220-440 50/60 HHBBL03 - 02 3 3/9 3.3 3 1440 3 220-440 50/60 0.75 1440 3 220-440 50/60 HHBBL03 - 01 3 3/9 5.6 3 1440 3 220-440 50/60 0.75 1440 3 220-440 50/60 HHBBL05 - 02 5 3/9 2.8 3 1440 3 220-440 50/60 0.75 1440 3 220-440 50/60 HHBBL7.5-03 7.5 3/9 1.8 3 1440 3 220-440 50/60 0.75 1440 3 220-440 50/60 Product Size:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China 0.5-01/01-01/02-01/03-01 Low Lifting Hoist:

0.5-01/01-01/02-01/03-01 Low Lifting Hoist



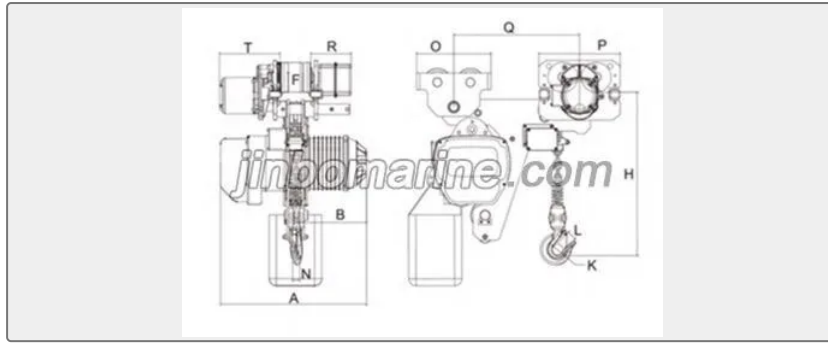

Technical Parameters:

Type	Capacity(Ton)	Lifting Height (m)	Lifting Speed (m/min)	Lifting Moter					Operating Moter				
				P o w e r (k w)	R o t a t i o n s p e e d (r / m i n)	P h a s e s	v o l t a g e (v)	F r e q u e n c y (H z)	P o w e r (k w)	R o t a t i o n s p e e d (r / m i n)	P h a s e s	v o l t a g e (v)	F r e q u e n c y (H z)
HHBBL0.5 - 01	0.5	3/9	7.2	1 . 1	1 4 4 0	3	2 2 0 / - 4 4 0	5 0 / 6 4 0	0 . 2	1 4 4 0	3	2 2 0 / - 4 4 0	5 0 / 6 4 0
HHBBL01 - 02	1	3/9	3.6	1 . 1	1 4 4 0	3	2 2 0 / - 4 4 0	5 0 / 6 4 0	0 . 4	1 4 4 0	3	2 2 0 / - 4 4 0	5 0 / 6 4 0
HHBBL01 - 01	1	3/9	6.8	1 . 5	1 4 4 0	3	2 2 0 / - 4 4 0	5 0 / 6 4 0	0 . 4	1 4 4 0	3	2 2 0 / - 4 4 0	5 0 / 6 4 0



HHBBL02 - 02	2	3/9	3.4	1 . 5	1 4 4 0	3	2 2 0 - 4 4 0	5 0 / 6 0	0 . 4 4 0	1 4 4 0	3	2 2 0 - 4 4 0	5 0 / 6 0
HHBBL02 - 01	2	3/9	6.6	3	1 4 4 0	3	2 2 0 - 4 4 0	5 0 / 6 0	0 . 4 4 0	1 4 4 0	3	2 2 0 - 4 4 0	5 0 / 6 0
HHBBL03 - 03	3	3/9	2.2	1 . 5	1 4 4 0	3	2 2 0 - 4 4 0	5 0 / 6 0	0 . 7 5 0	1 4 4 0	3	2 2 0 - 4 4 0	5 0 / 6 0
HHBBL03 - 02	3	3/9	3.3	3	1 4 4 0	3	2 2 0 - 4 4 0	5 0 / 6 0	0 . 7 5 0	1 4 4 0	3	2 2 0 - 4 4 0	5 0 / 6 0
HHBBL03 - 01	3	3/9	5.6	3	1 4 4 0	3	2 2 0 - 4 4 0	5 0 / 6 0	0 . 7 5 0	1 4 4 0	3	2 2 0 - 4 4 0	5 0 / 6 0
HHBBL05 - 02	5	3/9	2.8	3	1 4 4 0	3	2 2 0 - 4 4 0	5 0 / 6 0	0 . 7 5 0	1 4 4 0	3	2 2 0 - 4 4 0	5 0 / 6 0
HHBBL7.5-03	7.5	3/9	1.8	3	1 4 4 0	3	2 2 0 - 4 4 0	5 0 / 6 0	0 . 7 5 0	1 4 4 0	3	2 2 0 - 4 4 0	5 0 / 6 0

Product Size:



Type	Capacity	H	A	B	F	K	L	N	O	P	Q	T	R	I-BEAM
HHBB L0.5 - 01	0.5	350	460	230	Φ60	Φ32	25	17	190	315	400.7	185	168	100-160
HHBB L01 - 02	1	410	460	230	Φ95	Φ40	31	24	190	315	400.7	252	168	100-160
HHBB L01 - 01	1	480	520	260	Φ95	Φ40	31	24	190	315	445	252	168	100-160
HHBB L02 - 02	2	535	520	260	Φ110	Φ49	35	30	257	325	444.5	252	168	120-160
HHBB L02 - 01	2	570	620	300	Φ110	Φ49	35	30	257	325	505	252	168	120-160
HHBB L03 - 03	3	680	520	260	Φ125	Φ59	42	35	310	325	584	252	168	120-160
HHBB L03 - 02	3	685	620	300	Φ125	Φ59	42	35	310	340	503	252	168	120-160
HHBB L03 - 01	3	640	620	300	Φ125	Φ59	42	35	310	340	526	252	168	120-160
HHBB L05 - 02	5	740	620	300	Φ175	Φ60	45	43	355	400	541	252	168	120-160
HHBB L7.5-03	7.5	900	620	300	Φ175	Φ83	68	55	355	400	751	252	168	120-160