

# Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

## MARINE HOIST

# 0.5-01/01-01/02-01/03-01 Running Type Electrical Hoist

ISO9001 Supplier

Class Certificate

Export Supply


0.5-01/01-01/02-01/03-01 Running Type Electrical Hoist Technical Parameters: Type Capacity(Ton) Lifting Height (m) ...



### Key Highlights

Category	Marine Hoist
Standard	EN
Weight / Size	Type Capacity(Ton) Lifting Height (m) Lifting Speed (m/min) Lifting Mote...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS


We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.



Technical Specifications			
<b>Category</b>	Marine Hoist	<b>Model / SKU</b>	0-5-01-01-01-02-01-03-01-Running-Type-Electrical-Hoist
<b>Standard</b>	EN	<b>Weight / Size</b>	Type Capacity(Ton) Lifting Height (m) Lifting Speed (m/min) Lifting Moter Operating Moter Power(kw) Rotation speed(r/min) Phases voltage(v) Frequency(Hz) Power(kw) Rotation speed(r/min) Phases voltage(v) Frequency(Hz) HHBB0.5 - 01 0.5 3/9 7.2 1.1 1440 3 220-440 50/60 0.2 1440 3 220-440 50/60 HHBB01 - 02 1 3/9 3.6 1.1 1440 3 220-440 50/60 0.4 1440 3 220-440 50/60 HHBB01 - 01 1 3/9 6.8 1.5 1440 3 220-440 50/60 0.4 1440 3 220-440 50/60 HHBB02 - 02 2 3/9 3.4 1.5 1440 3 220-440 50/60 0.4 1440 3 220-440 50/60 HHBB02 - 01 2 3/9 6.6 3 1440 3 220-440 50/60 0.4 1440 3 220-440 50/60 HHBB03 - 03 3 3/9 2.2 1.5 1440 3 220-440 50/60 0.75 1440 3 220-440 50/60 HHBB03 - 02 3 3/9 3.3 3 1440 3 220-440 50/60 0.75 1440 3 220-440 50/60 HHBB03 - 01 3 3/9 5.6 3 1440 3 220-440 50/60 0.75 1440 3 220-440 50/60 HHBB05 - 02 5 3/9 2.8 3 1440 3 220-440 50/60 0.75 1440 3 220-440 50/60 Product Size:
<b>Certificate</b>	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	<b>Warranty</b>	12 Months unless specified otherwise
<b>Origin</b>	China		

## China 0.5-01/01-01/02-01/03-01 Running Type Electrical Hoist:

0.5-01/01-01/02-01/03-01 Running Type Electrical Hoist

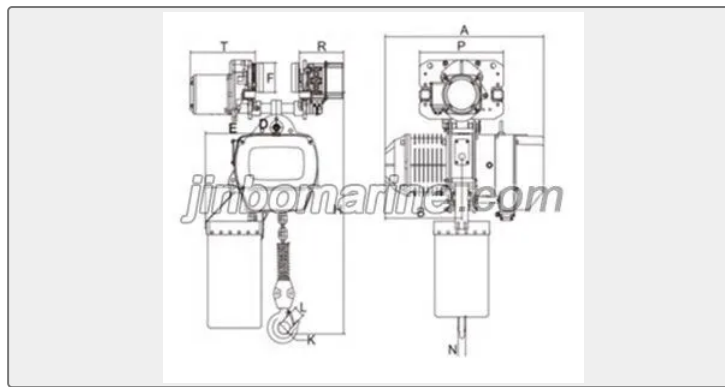


## Technical Parameters:

Type	Capacity(Ton)	Lifting Height (m)	Lifting Speed (m/min)	Lifting Moter					Operating Moter				
				Power(kw)	Rotation speed(r/min)	Phases	voltage(v)	Frequency(Hz)	Power(kw)	Rotation speed(r/min)	Phases	voltage(v)	Frequency(Hz)
HHBBO.5 - 01	0.5	3/9	7.2	1.1	1440	3	220-440	50/60	0.2	1440	3	220-440	50/60
HHBBO1 - 02	1	3/9	3.6	1.1	1440	3	220-440	50/60	0.4	1440	3	220-440	50/60
HHBBO1 - 01	1	3/9	6.8	1.5	1440	3	220-440	50/60	0.4	1440	3	220-440	50/60
HHBBO2 - 02	2	3/9	3.4	1.5	1440	3	220-440	50/60	0.4	1440	3	220-440	50/60
HHBBO2 - 01	2	3/9	6.6	3	1440	3	220-440	50/60	0.4	1440	3	220-440	50/60
HHBBO3 - 03	3	3/9	2.2	1.5	1440	3	220-440	50/60	0.75	1440	3	220-440	50/60
HHBBO3 - 02	3	3/9	3.3	3	1440	3	220-440	50/60	0.75	1440	3	220-440	50/60
HHBBO3 - 01	3	3/9	5.6	3	1440	3	220-440	50/60	0.75	1440	3	220-440	50/60
HHBBO5 - 02	5	3/9	2.8	3	1440	3	220-440	50/60	0.75	1440	3	220-440	50/60

## Product Size:

Type	Capacity	H	A	B	D	E	F	K	L	N	P	T	R	I-BEAM
HHBBO.5 - 01	0.5	630	460	230	240	160	Φ60	Φ32	25	17	198	185	168	70-130
HHBBO1 - 02	1	640	460	230	240	205	Φ95	Φ40	31	24	315	252	168	80-160



HHBB01 - 01	1	650	520	260	310	205	Φ95	Φ40	31	24	315	252	168	80-160
HHBB02 - 02	2	740	520	260	310	230	Φ110	Φ49	35	30	325	252	168	82-178
HHBB02 - 01	2	770	620	300	440	265	Φ125	Φ49	35	30	325	252	168	82-178
HHBB03 - 03	3	920	420	260	310	280	Φ125	Φ59	42	35	340	252	168	110-180
HHBB03 - 02	3	940	620	300	440	320	Φ125	Φ59	42	35	340	252	168	100-180
HHBB03 - 01	3	840	620	300	440	265	Φ125	Φ59	42	35	340	252	168	100-180
HHBB05 - 02	5	1015	620	300	440	325	Φ175	Φ60	45	43	400	252	168	110-180