

MARINE HOIST

0.5-01/01-01/02-01/03-01 Running Type Electrical Hoist

ISO9001 Supplier

Class Certificate

Export Supply

0.5-01/01-01/02-01/03-01 Running Type Electrical Hoist Technical Parameters: Type Capacity(Ton) Lifting Height (m) ...



Key Highlights


Category	Marine Hoist
Standard	EN
Weight / Size	Type Capacity(Ton) Lifting Height (m) Lifting Speed (m/min) Lifting Mote...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	Marine Hoist	Model / SKU	0-5-01-01-01-02-01-03-01-Running-Type-Electrical-Hoist
Standard	EN	Weight / Size	Type Capacity(Ton) Lifting Height (m) Lifting Speed (m/min) Lifting Moter Operating Moter Power(kw) Rotation speed(r/min) Phases voltage(v) Frequency(Hz) Power(kw) Rotation speed(r/min) Phases voltage(v) Frequency(Hz) HHBB0.5 - 01 0.5 3/9 7.2 1.1 1440 3 220-440 50/60 0.2 1440 3 220-440 50/60 HHBB01 - 02 1 3/9 3.6 1.1 1440 3 220-440 50/60 0.4 1440 3 220-440 50/60 HHBB01 - 01 1 3/9 6.8 1.5 1440 3 220-440 50/60 0.4 1440 3 220-440 50/60 HHBB02 - 02 2 3/9 3.4 1.5 1440 3 220-440 50/60 0.4 1440 3 220-440 50/60 HHBB02 - 01 2 3/9 6.6 3 1440 3 220-440 50/60 0.4 1440 3 220-440 50/60 HHBB03 - 03 3 3/9 2.2 1.5 1440 3 220-440 50/60 0.75 1440 3 220-440 50/60 HHBB03 - 02 3 3/9 3.3 3 1440 3 220-440 50/60 0.75 1440 3 220-440 50/60 HHBB03 - 01 3 3/9 5.6 3 1440 3 220-440 50/60 0.75 1440 3 220-440 50/60 HHBB05 - 02 5 3/9 2.8 3 1440 3 220-440 50/60 0.75 1440 3 220-440 50/60 Product Size:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China 0.5-01/01-01/02-01/03-01 Running Type Electrical Hoist:

0.5-01/01-01/02-01/03-01 Running Type Electrical Hoist

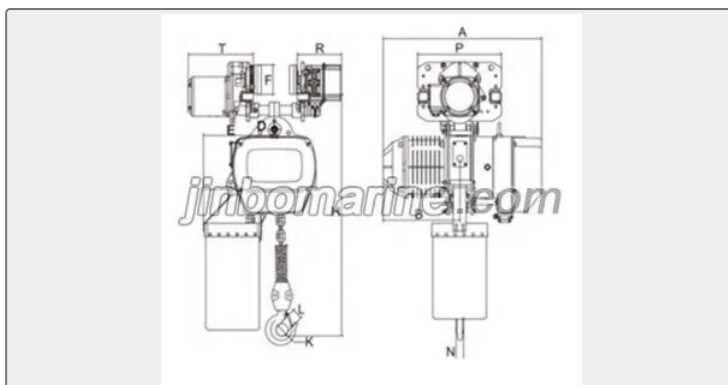

Technical Parameters:

Type	Capacity(Ton)	Lifting Height (m)	Lifting Speed (m/min)	Lifting Moter					Operating Moter				
				Pow er(k w)	Rotation speed(r/ min)	Pha ses	volta ge(v)	Frequ ency(Hz)	Pow er(k w)	Rotation speed(r/ min)	Pha ses	volta ge(v)	Frequ ency(Hz)
HHBB0.5 - 01	0.5	3/9	7.2	1.1	1440	3	220-440	50/60	0.2	1440	3	220-440	50/60
HHBB01 - 02	1	3/9	3.6	1.1	1440	3	220-440	50/60	0.4	1440	3	220-440	50/60
HHBB01 - 01	1	3/9	6.8	1.5	1440	3	220-440	50/60	0.4	1440	3	220-440	50/60
HHBB02 - 02	2	3/9	3.4	1.5	1440	3	220-440	50/60	0.4	1440	3	220-440	50/60
HHBB02 - 01	2	3/9	6.6	3	1440	3	220-440	50/60	0.4	1440	3	220-440	50/60
HHBB03 - 03	3	3/9	2.2	1.5	1440	3	220-440	50/60	0.75	1440	3	220-440	50/60
HHBB03 - 02	3	3/9	3.3	3	1440	3	220-440	50/60	0.75	1440	3	220-440	50/60
HHBB03 - 01	3	3/9	5.6	3	1440	3	220-440	50/60	0.75	1440	3	220-440	50/60
HHBB05 - 02	5	3/9	2.8	3	1440	3	220-440	50/60	0.75	1440	3	220-440	50/60

Product Size:

Type	Capacity	H	A	B	D	E	F	K	L	N	P	T	R	I-BEAM
HHBB0.5 - 01	0.5	630	460	230	240	160	Φ60	Φ32	25	17	198	185	168	70-130
HHBB01 - 02	1	640	460	230	240	205	Φ95	Φ40	31	24	315	252	168	80-160

HHBB01 - 01	1	650	520	260	310	205	Φ95	Φ40	31	24	315	252	168	80- 160
HHBB02 - 02	2	740	520	260	310	230	Φ110	Φ49	35	30	325	252	168	82- 178
HHBB02 - 01	2	770	620	300	440	265	Φ125	Φ49	35	30	325	252	168	82- 178
HHBB03 - 03	3	920	420	260	310	280	Φ125	Φ59	42	35	340	252	168	110- 180
HHBB03 - 02	3	940	620	300	440	320	Φ125	Φ59	42	35	340	252	168	100- 180
HHBB03 - 01	3	840	620	300	440	265	Φ125	Φ59	42	35	340	252	168	100- 180
HHBB05 - 02	5	1015	620	300	440	325	Φ175	Φ60	45	43	400	252	168	110- 180