

CRUSHING PUMP

0.5PWF-8 Marine Smash Crushing Pump

- ISO9001 Supplier
- Class Certificate
- Export Supply

0.5PWF-8 Marine Smash Crushing Pump: PWF smash pump for ships is mainly used for smashing and pumping of the waste in domestic sewage(for instance,paper,food waste,mud,anddry excrement).The largest diamerer of the ...



Key Highlights

Category	Crushing Pump
Standard	EN
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Crushing Pump	Model / SKU	0-5PWF-8-Marine-Smash-Crushing-Pump
Standard	EN	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China


CONTENTS

- 0.5PWF-8 Marine Smash Crushing Pump:
- Data Sheet:

0.5PWF-8 Marine Smash Crushing Pump:

PWF smash pump for ships is mainly used for smashing and pumping of the waste in domestic sewage(for instance,paper,food waste,mud,anddry excrement).The largest diamerer of the solid particles after being smashed is no more than 5mm.The pump is more suitable for smashing low temperature agglomeratcd heavy oil to facilitatc the spraying.



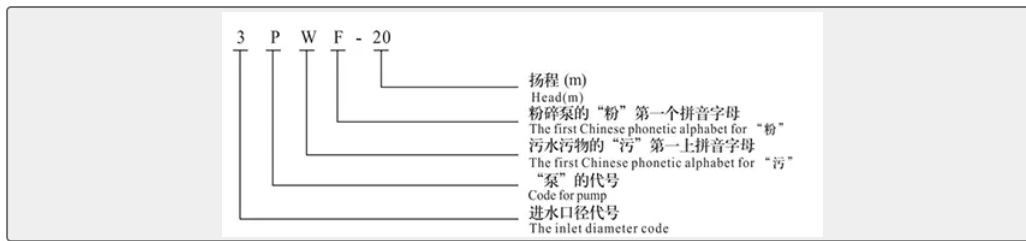

Data Sheet:

Model	Flow/h		Pressure Mpa		Motor Power KW		Speed rpm		ID mm	OD mm
	50HZ	60HZ	50HZ	60HZ	50HZ	60HZ	50HZ	60HZ		
0.5PWF-8	5.00	6.10	0.08	0.12	0.75	1.50	2938	3460	50	32
0.5PWF-10	5.00	6.10	0.10	0.15	1.10	2.20	2840	3460	50	32
0.5PWF-15	5.00	6.10	0.15	0.22	1.10	2.20	2840	3460	50	32
0.5PWF-20	5.00	6.10	0.20	0.30	2.20	4.00	2845	3470	50	32
0.5PWF-25	5.00	6.10	0.25	0.37	2.20	4.00	2845	3470	50	32
1PWF-11	10.00	12.20	0.11	0.16	1.50	3.00	2845	3470	65	32
1PWF-20	10.00	12.20	0.20	0.30	3.00	5.50	2860	3490	65	32
1PWF-25	10.00	12.20	0.25	0.37	4.00	7.50	2870	3500	65	32
2PWF-11	20.00	24.40	0.11	0.16	2.20	4.00	2845	3470	65	40
2PWF-20	20.00	24.40	0.20	0.29	5.50	11.00	2900	3520	65	40
2PWF-25	20.00	24.40	0.25	0.36	7.50	15.00	2915	3520	65	40
2.5PWF-6	20.00	24.40	0.06	0.09	2.20	4.00	2840	3470	65	40
2.5PWF-6A	10.00	12.20	0.06	0.09	1.50	3.00	2845	3470	65	40
2.5PWF-6B	5.00	6.10	0.06	0.09	1.50	3.00	2840	3460	65	32
2.5PWF-10	10.00	12.20	0.06	0.09	1.50	3.00	2840	3470	65	40
2.5PWF-20	20.00	24.40	0.06	0.09	2.20	4.00	2840	3470	65	40
3PWF-6	30.00	36.60	0.06	0.09	4.00	7.50	2870	3500	80	50
3PWF-10	30.00	36.60	0.10	0.15	4.00	7.50	2870	3500	80	50
3PWF-20	30.00	36.60	0.20	0.29	5.50	11.00	2900	3520	80	50
3PWF-25	30.00	36.60	0.25	0.36	7.50	15.00	2915	3520	80	50

