

BILGE PUMP

07 Series 750GPH Bilge Pump

07 Series 750GPH Bilge Pump All-in-one pump & float switch. No additional float switch required. Pump turns on when water level rises & shuts off when water is removed. SEAFLO shower sump pump s...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Bilge Pump
Standard	EN
Weight / Size	SFBP1-G750-07 750 GPH 12V 3.0 A 5.0 A 9' (3m) 3' (1m) 3/4" 1.17/1.35 kg ...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.	

Technical Specifications


Category	Bilge Pump	Model / SKU	07-Series-750GPH-Bilge-Pump
Standard	EN	Weight / Size	SFBP1-G750-07 750 GPH 12V 3.0 A 5.0 A 9' (3m) 3' (1m) 3/4" 1.17/1.35 kg SFBP2-G750-07 750 GPH 24V 1.6 A 3.0 A 9' (3m) 3' (1m) 3/4" 1.17/1.36 kg PERFORMANCE 750GPH Voltage(V) Current(A) Flow Head(M) GPH LPH 12 2.6 690 2612 0 12 2.6 680 2574 0.4 12 2.7 620 2347 0.8 12 2.7 560 2120 1.2 12 2.8 430 1628 1.6 12 2.8 370 1400 2 12 2.8 320 1211 2.4
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

CONTENTS

- 07 Series 750GPH Bilge Pump
- PERFORMANCE

■ STANDARD PUMP CONFIGURATIONS

07 Series 750GPH Bilge Pump

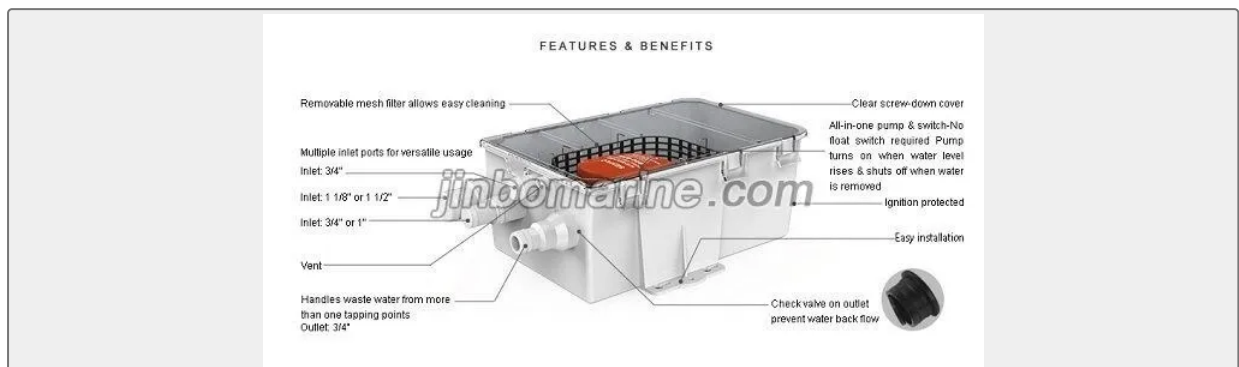

All-in-one pump & float switch. No additional float switch required. Pump turns on when water level rises & shuts off when water is removed. SEAFLO shower sump pump system with multiple inlet ports for versatile usage. Clear screw-down cover and removable mesh filter for easy replacement or in the event that the pump becomes clogged with debris. Check valve on outlet prevent water back flow.

STANDARD PUMP CONFIGURATIONS

Model	FlowRate	Voltage	Max Draw	Fuse Amps	Head	Wire Lead	Outlet Dia	N.W. / G.W.
SFBP1-G750-07	750 GPH	12V	3.0 A	5.0 A	9' (3m)	3' (1m)	3/4"	1.17/1.35 kg
SFBP2-G750-07	750 GPH	24V	1.6 A	3.0 A	9' (3m)	3' (1m)	3/4"	1.17/1.36 kg

PERFORMANCE

750GPH

Voltage(V)	Current(A)	Flow		Head(M)
		GPH	LPH	
12	2.6	690	2612	0
12	2.6	680	2574	0.4
12	2.7	620	2347	0.8
12	2.7	560	2120	1.2
12	2.8	430	1628	1.6
12	2.8	370	1400	2
12	2.8	320	1211	2.4