


Technical Specifications			
Category	Marine Hoist	Model / SKU	10-04-15-06-20-08-25-10-HHBB-Series-Kito-Electric-Chain-Hoist
Standard	EN	Weight / Size	Type Capacity(Ton) Lifting Height (m) Lifting Speed (m/min) Lifting Moter Traveing speed(m/min) Operating Moter Power(kw) Rotation speed(r/min) Phases voltage(v) Frequency(Hz) Power(kw) Rotation speed(r/min) Phases voltage(v) Frequency(Hz) HHBB10-04 10 3/9 2.8 3x2 1440 3 220-440 50/60 10/20 0.75x2 1440 3 220-440 50/60 HHBB15 - 06 15 3/9 1.8 3x2 1440 3 220-440 50/60 10/20 0.75x2 1440 3 220-440 50/60 HHBB20 - 8 20 3/9 1.4 3x2 1440 3 220-440 50/60 10/20 0.75x2 1440 3 220-440 50/60 HHBB25 - 10 25 3/9 1.1 3x2 1440 3 220-440 50/60 10/20 0.75x2 1440 3 220-440 50/60 Product Size:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China 10 - 04/15 - 06/20 - 08/25 - 10 HHBB Series Kito Electric Chain Hoist:

10 - 04/15 - 06/20 - 08/25 - 10 HHBB Series Kito Electric Chain Hoist

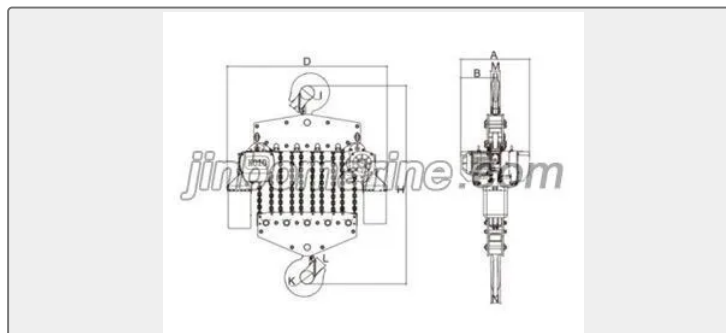


Technical Parameters:



Type	Capacity(Ton)	Lifting Height (m)	Lifting Speed (m/min)	Lifting Moter					Traveing speed(m/min)	Operating Moter				
				P o w e r (k w)	R o t a t i o n s p e e d (r / m i n)	P h a s e s	v o l t a g e (v)	F r e q u e n c y (H z)		P o w e r (k w)	R o t a t i o n s p e e d (r / m i n)	P h a s e s	v o l t a g e (v)	F r e q u e n c y (H z)
HHBB10-04	10	3/9	2.8	3 x 2	1 4 4 0	3	2 2 0 / - 4 4 0	5 0 / 6 4 0	10/20	0 . 7 5 x 2	1 4 4 0	3	2 2 0 / - 4 4 0	5 0 / 6 4 0
HHBB15 - 06	15	3/9	1.8	3 x 2	1 4 4 0	3	2 2 0 / - 4 4 0	5 0 / 6 4 0	10/20	0 . 7 5 x 2	1 4 4 0	3	2 2 0 / - 4 4 0	5 0 / 6 4 0
HHBB20 - 8	20	3/9	1.4	3 x 2	1 4 4 0	3	2 2 0 / - 4 4 0	5 0 / 6 4 0	10/20	0 . 7 5 x 2	1 4 4 0	3	2 2 0 / - 4 4 0	5 0 / 6 4 0
HHBB25 - 10	25	3/9	1.1	3 x 2	1 4 4 0	3	2 2 0 / - 4 4 0	5 0 / 6 4 0	10/20	0 . 7 5 x 2	1 4 4 0	3	2 2 0 / - 4 4 0	5 0 / 6 4 0

Product Size:

Type	Capacity	H	A	B	D	E	F	K	L	N	I-BEAM	Chain
HHBB10 - 04	10	880	630	315	1620	365	365	Φ83	68	55	150-220	Φ11.2
HHBB15 - 06	15	1100	630	315	1840	365	365	Φ115	90	72	150-220	Φ11.2



HHBB20 - 08	20	1180	630	315	2050	365	365	Φ115	90	72	150- 220	Φ11.2
HHBB25 - 10	25	1280	630	315	2265	365	365	Φ142	110	85	150- 220	Φ11.2

