IEEE STD 45/1580 CABLE


600V TT(OBS)PMBS Offshore Signal Cable(With Overall Braid Shield)--Pair Twisted

ISO9001 Supplier

Class Certificate

Export Supply

Cable Type 600V Flame retardant: TP (OBS)PN TP(OBS)PNA TP(OBS)PNB TP(OBS)PNBS   TP(OBS)LSEL TP(OBS)LSELA...

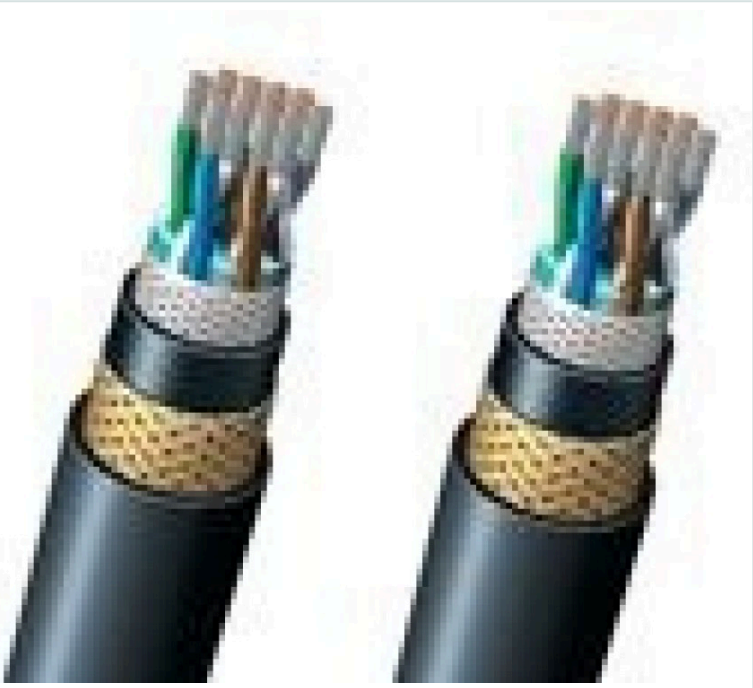

Key Highlights

Category	IEEE Std 45/1580 Cable
Standard	DIN
Material	Tinned Copper/XLPE Insulation/ Neoprene/ Bronze or Tinned Copper Wire/ N...
Weight / Size	245(1995) IEEE 1202(1991) IEC 60332-3 Category A CSA C 22.2 NO.38(at -40...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS


We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	IEEE Std 45/1580 Cable	**Model / SKU**	600V-TT-OBS-PMBS-Offshore-Signal-Cable-With-Overall-Braid-Shield-Pair-Twisted
Standard	DIN	**Material**	Tinned Copper/XLPE Insulation/ Neoprene/ Bronze or Tinned Copper Wire/ Neoprene
Weight / Size	245(1995) IEEE 1202(1991) IEC 60332-3 Category A CSA C 22.2 NO.38(at -40℃) IEC 60331-1(FS type Cable) NEK 606 Cores & Size Cores:	**Certificate**	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	**Origin**	China

CONTENTS

- Cable Type 600V
- Cores & Size
- Advantage of IEEE 1580 Cable
- Standards
- Application:

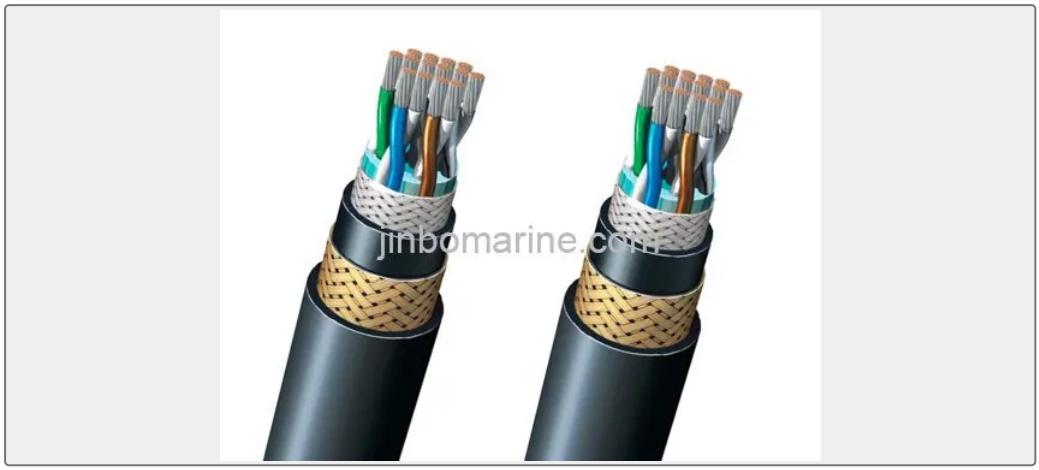

Cable Type 600V

Flame retardant: TP (OBS)PN TP(OBS)PNA TP(OBS)PNB TP(OBS)PNBS TP(OBS)LSEL TP(OBS)LSELA TP(OBS)LSELB TP(OBS)LSELBS TP(OBS)PM TP(OBS)PMA TP(OBS)PMB TP(OBS)PMBS
Fire-resisting layer: FS Type only.

Cable Construction

Classification	Code	Construction details
Conductor	Annealed Stranded Copper Wire	
Cable Type	TT	Signal Cable
Fire-resisting(Optional)	FS	Mica Tape
Insulation	P	Cross-Linked Polyolefin
LSE	Low Smoke EP Rubber	
Overall Shied	OBS	Tinned copper wire braid 85% coverage over the cable core
Jacket	N	Flame Retardant Thermosetting Neoprene

L	Flame Retardant Low Smoke XLPO	
M	Flame Retardant Mud Resistant XLPO	
Armor(Optional)	B	Bronze
T	Tinned Copper Wire	
Outer Sheath(Optional)	S	Same as Jacket

Standards

IEEE 1560(2001) IEC 45(1998)

UL 1309/CSA C 22.2 NO. 245(1995)

IEEE 1202(1991)

IEC 60332-3 Category A

CSA C 22.2 NO.38(at -40℃)

IEC 60331-1(FS type Cable)

NEK 606

Cores & Size

Cores: 1 2 4 5 7 10 12 14 16 19 24

Size (AWG or MCM): 18

Application:

The cable is fixed installation for signal, voltage up to 600V, apply for commercial marine, shipping building, MODU'S and Platform.

Advantage of IEEE 1580 Cable

Flame retardant

Fire-resistant (FS Type)

Resistance to oil, abrasion, petrochemical fluid, moisture and sunlight

Excellent flexibility

Mud Resistant