

IEEE STD 45/1580 CABLE


600V TT(IS-OS)PMBS Offshore Signal Cable(With Individual and Overall Shield)

ISO9001 Supplier

Class Certificate

Export Supply

Cable Type 600V TP (I/S-OS)PN TP(I/S-OS)PNA TP(I/S-OS)PNB TP(I/S-OS)PNBS TP(I/S-OS)LSEL TP(I/S-OS)LSELA TP(I/S-OS)LSELB TP(I/...

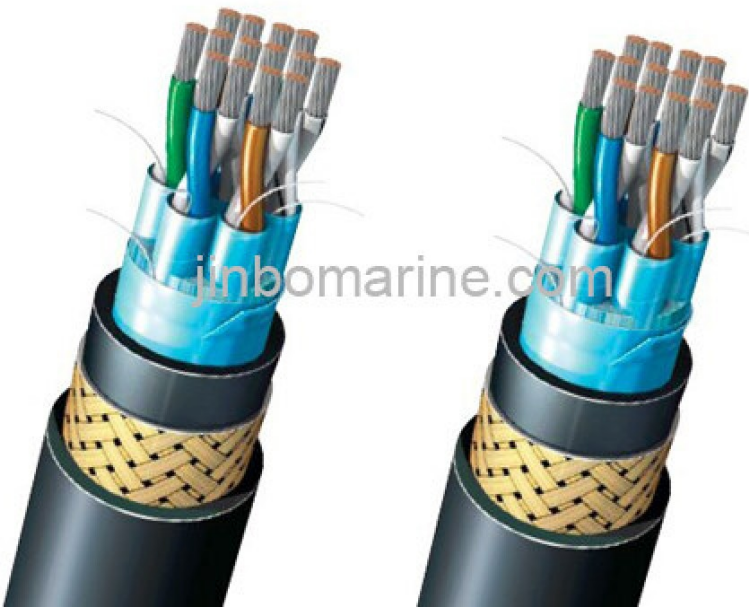

Key Highlights


Category	IEEE Std 45/1580 Cable
Standard	DIN
Material	Tinned Copper/XLPE Insulation/Individual and Overall Shield/Neoprene/Tin...
Weight / Size	245(1995) IEEE 1202(1991) IEC 60332-3 Category A CSA C 22.2 NO.38(at -40...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	IEEE Std 45/1580 Cable	Model / SKU	600V-TT-IS-OS-PMBS-Offshore-Signal-Cable-With-Individual-and-Overall-Shield
Standard	DIN	Material	Tinned Copper/XLPE Insulation/Individual and Overall Shield/Neoprene/Tinned Copper Wier/Neoprene
Weight / Size	245(1995) IEEE 1202(1991) IEC 60332-3 Category A CSA C 22.2 NO.38(at -40°C) IEC 60331-1(FS type Cable) NEK 606 Cores & Size Cores:	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS	■ Cable Type 600V	■ Cable Construction
	■ Standards	■ Cores & Size
	■ Application:	■ Advantage of IEEE 1580 Cable

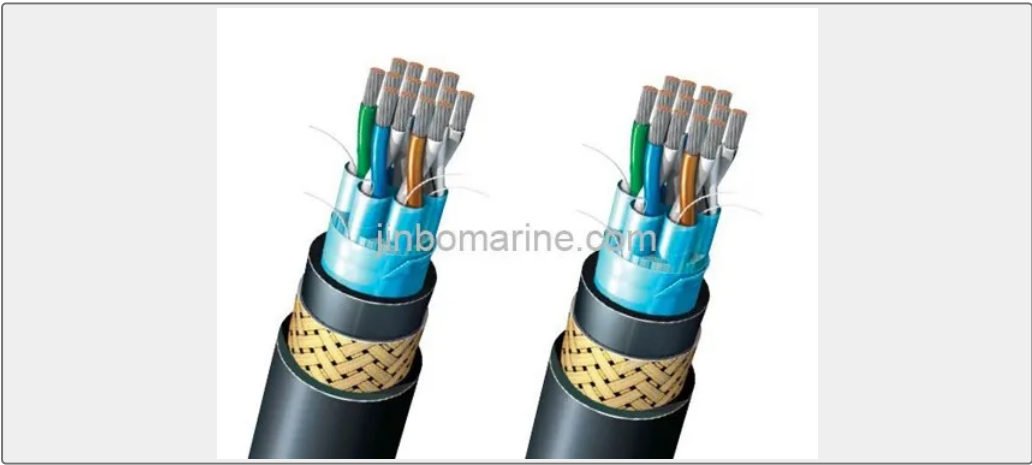

Cable Type 600V

TP (I/S-OS)PN TP(I/S-OS)PNA TP(I/S-OS)PNB
TP(I/S-OS)PNBS
TP(I/S-OS)LSEL TP(I/S-OS)LSELA TP(I/S-OS)LSELB
TP(I/S-OS)LSELBS
TP(I/S-OS)PM TP(I/S-OS)PMA TP(I/S-OS)PMB
TP(I/S-OS)PMBS

Fire-resisting layer: FS Type only.

Prefix "FS-" for fire resisting cable; Example: FS-TP(I/S)PN

Cable Construction

Classification	Code	Construction details
Conductor	Annealed Stranded Copper Wire	
Cable Type	TT	Signal Cable
Fire-resisting(Optional)	FS	Mica Tape
Insulation	P	Cross-Linked Polyolefin
LSE	Low Smoke EP Rubber	
Overall Shied	IS-OS	Individual Shield and Overall Shield.
Jacket	N	Flame Retardant Thermosetting Neoprene
L	Flame Retardant Low Smoke XLPO	
M	Flame Retardant Mud Resistant XLPO	
Aarmor(Optional)	B	Bronze
T	Tinned Copper Wire	
Outer Sheath(Optional)	S	Same as Jacket

Standards

- IEEE 1560(2001) IEC 45(1998)
- UL 1309/CSA C 22.2 NO. 245(1995)
- IEEE 1202(1991)
- IEC 60332-3 Category A
- CSA C 22.2 NO.38(at -40°C)
- IEC 60331-1(FS type Cable)
- NEK 606

Cores & Size

Cores: 1 2 4 5 7 10 12 14 16 19 24

Size (AWG or MCM): 18 16 14

Application:

The cable is fixed installation for signal, voltage up to 600V, apply for commercial marine, shipping building, MODU'S and Platform.

Advantage of IEEE 1580 Cable

Flame retardant

Fire-resistant (FS Type)

Resistance to oil, abrasion, petrochemical fluid, moisture and sunlight

Excellent flexibility

Mud Resistant