

CHAIN SLING

8-271 YOKE Swivel Point

8-271 YOKE Swivel Point Drawing 8-271 YOKE Swivel Point Parameters ITEM NO. WLL/T
THREAD/M WEIGHT/KG ...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights


Category	Chain Sling
Weight / Size	WLL/T THREAD/M WEIGHT/KG Y (Z) 8-271-003 0.4 0.6 M8X1.25 0.2 8-271-004 0...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement,
drawings, class certificate needs, and delivery
schedule.

Technical Specifications

Category	Chain Sling	Model / SKU	8-271-YOKE-Swivel-Point
Weight / Size	WLL/T THREAD/M WEIGHT/KG Y (Z) 8-271-003 0.4 0.6 M8X1.25 0.2 8-271-004 0.6 0.9 M10X1.5 0.2 8-271-006 0.7 1.2 M12X1.75 0.3 8-271-013 1.5 2.6 M16X2 0.5 8-271-020 2.5 4 M20X2.5 1.0 8-271-035 4 7 M24X3 2.2 8-271-060 6 10 M30X3.5 4.5 8-271-080 10 15 M36X4 4.6 8-271-120 13 17 M42X4.5 5.5 8-271-130 14 18 M48X5 6.1 8-271-140 20 25 M52X5 10.5 8-271-160 20 28 M56X5.5 10.7 8-271-161 20 28 M64X6 11.6 8-271-310 40 50 M72X6 30.6 8-271-350 48 50 M80X6 31.9 8-271-400 48 50 M90X6 33.9 ITEM NO.	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

8-271 YOKE Swivel Point Drawing

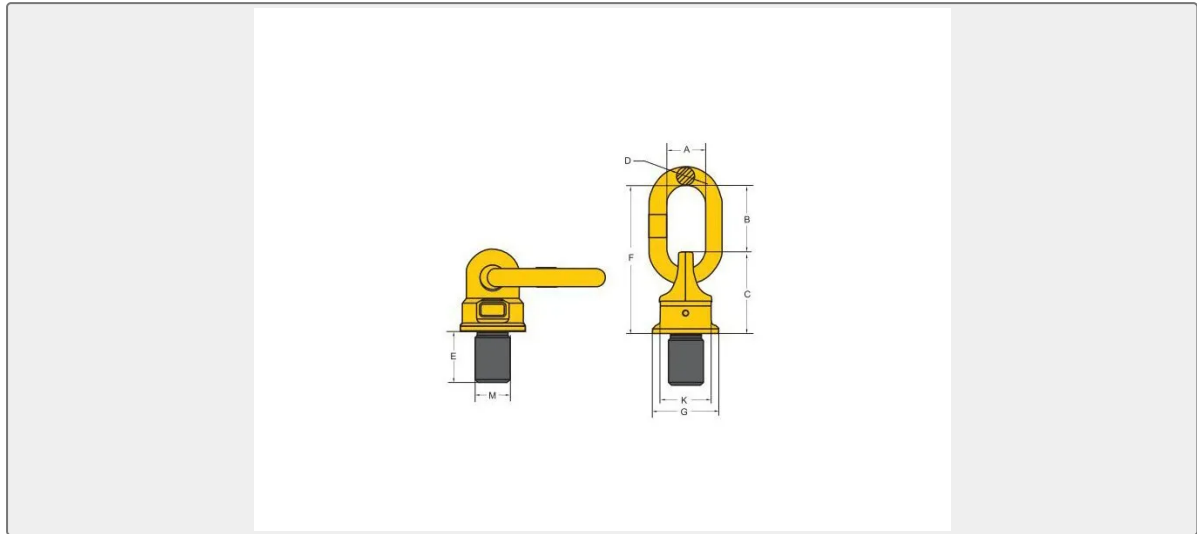

8-271 YOKE Swivel Point Parameters

ITEM NO.	WLL/T		THREAD/M	WEIGHT /KG
	Y	(Z)		
8-271-003	0.4	0.6	M8X1.25	0.2
8-271-004	0.6	0.9	M10X1.5	0.2
8-271-006	0.7	1.2	M12X1.75	0.3
8-271-013	1.5	2.6	M16X2	0.5
8-271-020	2.5	4	M20X2.5	1.0
8-271-035	4	7	M24X3	2.2
8-271-060	6	10	M30X3.5	4.5
8-271-080	10	15	M36X4	4.6
8-271-120	13	17	M42X4.5	5.5
8-271-130	14	18	M48X5	6.1
8-271-140	20	25	M52X5	10.5
8-271-160	20	28	M56X5.5	10.7
8-271-161	20	28	M64X6	11.6
8-271-310	40	50	M72X6	30.6
8-271-350	48	50	M80X6	31.9
8-271-400	48	50	M90X6	33.9

ITEM NO.	TECHNICAL PARAMETERS/MM			
	A	B	C	D
8-271-003	29	32	40	8
8-271-004	29	32	40	8
8-271-006	35	50	45	10
8-271-013	38	50	54	13
8-271-020	38	54	68	13
8-271-035	40	66	88	19
8-271-060	50	86	120	22
8-271-080	50	86	120	22
8-271-120	65	110	122	25
8-271-130	65	110	122	25
8-271-140	70	120	150	32
8-271-160	70	120	150	32
8-271-161	70	120	150	32
8-271-310	90	130	210	45
8-271-350	90	130	210	45
8-271-400	90	130	210	45
ITEM NO.	TECHNICAL PARAMETERS/MM			
	E	F	G	K
8-271-003	12	72	35	30
8-271-004	15	72	35	30
8-271-006	18	95	40	36
8-271-013	24	104	46	41
8-271-020	30	122	62	55
8-271-035	36	154	78	70
8-271-060	45	206	90	80
8-271-080	54	206	90	80
8-271-120	63	235	98	84
8-271-130	72	235	98	84
8-271-140	78	270	120	94
8-271-160	84	270	120	94
8-271-161	96	270	120	94

8-271-310	108	340	170	145
8-271-350	120	340	170	145
8-271-400	135	340	170	145