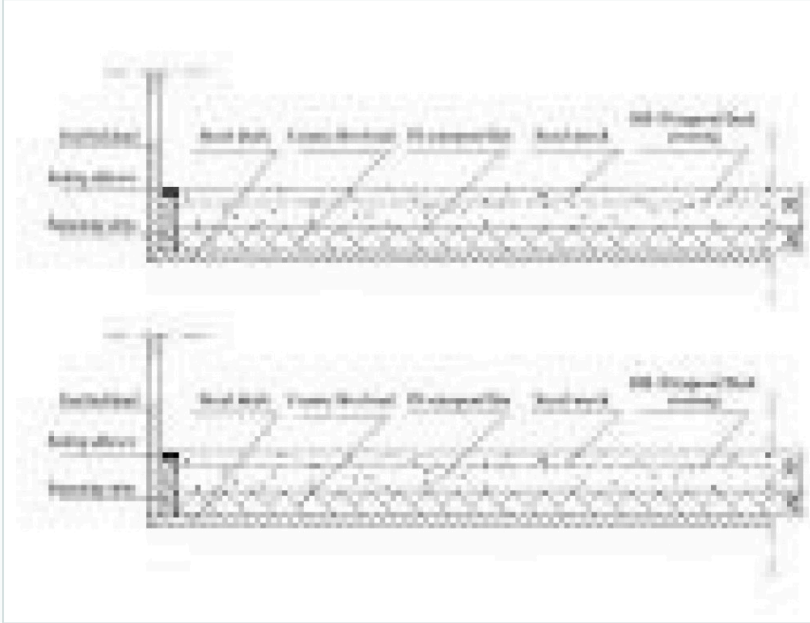


MARINE DECK COVERING

A60 Class Floating Deck

Main Specification No. Item name Index Standard 1 Fireproof Deck Covering ...

- ISO9001 Supplier
- Class Certificate
- Export Supply


	<p>Key Highlights</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="background-color: #1a3d4d; color: white; padding: 5px;">Category</td> <td style="padding: 5px;">Marine Deck Covering</td> </tr> <tr> <td style="background-color: #1a3d4d; color: white; padding: 5px;">Standard</td> <td style="padding: 5px;">EN</td> </tr> <tr> <td style="background-color: #1a3d4d; color: white; padding: 5px;">Material</td> <td style="padding: 5px;">Dry material (A component):</td> </tr> <tr> <td style="background-color: #1a3d4d; color: white; padding: 5px;">Weight / Size</td> <td style="padding: 5px;">Item name Index Standard 1 Fireproof Deck Covering Initial setting time ...</td> </tr> <tr> <td style="background-color: #1a3d4d; color: white; padding: 5px;">Certificate</td> <td style="padding: 5px;">ABS、 BV、 CCS、 DNV、 EC、 GL、 KR、 LR、 NK</td> </tr> </table> <p style="font-size: small; padding-top: 10px;">We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.</p>	Category	Marine Deck Covering	Standard	EN	Material	Dry material (A component):	Weight / Size	Item name Index Standard 1 Fireproof Deck Covering Initial setting time ...	Certificate	ABS、 BV、 CCS、 DNV、 EC、 GL、 KR、 LR、 NK
Category	Marine Deck Covering										
Standard	EN										
Material	Dry material (A component):										
Weight / Size	Item name Index Standard 1 Fireproof Deck Covering Initial setting time ...										
Certificate	ABS、 BV、 CCS、 DNV、 EC、 GL、 KR、 LR、 NK										

Technical Specifications			
Category	Marine Deck Covering	Model / SKU	A60-Class-Floating-Deck
Standard	EN	Material	Dry material (A component):
Weight / Size	Item name Index Standard 1 Fireproof Deck Covering Initial setting time ≥1h Q/HCF 1-2004 2 Final setting time ≤12h 3 Modulus of rupture ≥4MPa 4 Compressive strength ≥20MPa 5 Density ≤1600kg/m ³ 6 Water absorption ≤10% 7 Oil absorption ≤5% 8 Heat conductivity ≤1.2W/m.k 9 Non-combustibility In accordance with IMO.FTPC Part 1/IMO.A 799(19) 10 Deck Structure Fire Rating A-60 11 Weight per square meter ≤50 kg/m ² /50mm Feature Characteristic:	Certificate	ABS、 BV、 CCS、 DNV、 EC、 GL、 KR、 LR、 NK
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS

■ Main Specification

■ Feature

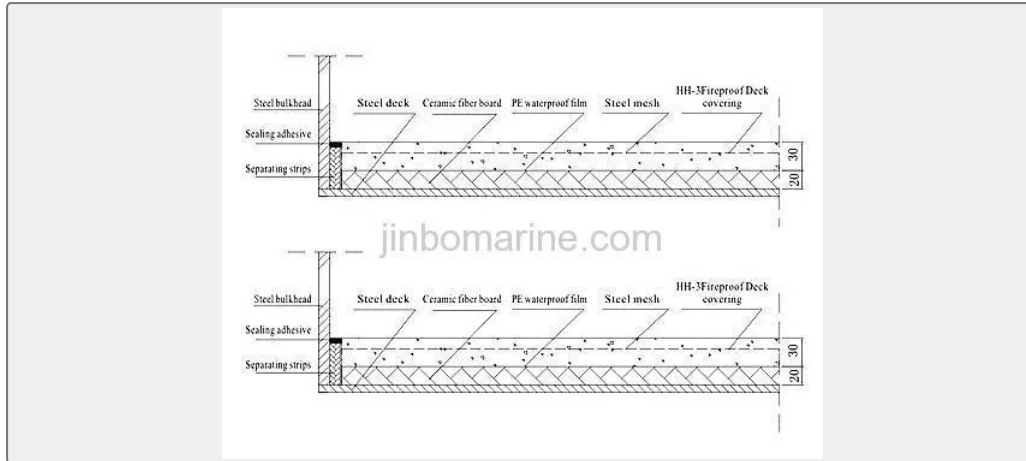

Main Specification

No.	Item name	Index	Standard
1	Fireproof Deck Covering	Initial setting time	≥1h
2		Final setting time	≤12h
3		Modulus of rapture	≥4MPa
4		Compressive strength	≥20MPa
5		Density	≤1600kg/m ³
6		Water absorption	≤10%
7		Oil absorption	≤5%
8		Heat conductivity	≤1.2W/m.k
9		Non-combustibility	In accordance with IMO.FTPC Part 1/IMO.A 799(19)
10	Deck Structure	Fire Rating	A-60
11		Weight per square meter	≤50 kg/m ² /50mm

Feature

Characteristic: Vibration resistance, impact resistance, sound absorption, elastic, fire rating is A-60 class

Applied: Covering for A-60 class decks and other approx. A-60 class structures.

Consume amount: 40 kg/m² (HH-3 face layer)

Packing: Dry material (A component): 30kg/pack, supply steel meshes, PE waterproof films and ceramic boards in package counting in areas

Storage: Cool and dry place, moisture-proof, the quality guarantee period is 6 months

Certificate: ABS、 BV、 CCS、 DNV、 EC、 GL、 KR、 LR、 NK