

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE AUTOMATIC TELEPHONE SYSTEM

AQ-1 Safety Barrier

AQ-1 Safety Barrier Uo:31.8V lo:84mA Po:0.67W
 Co:0.482μF Lo:20mH L/R=213 Ambient temperature: -10°C ~ +50°C。
 Color: Black...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Marine Automatic Telephone System
Standard	EN
Weight / Size	IP44 Weight:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

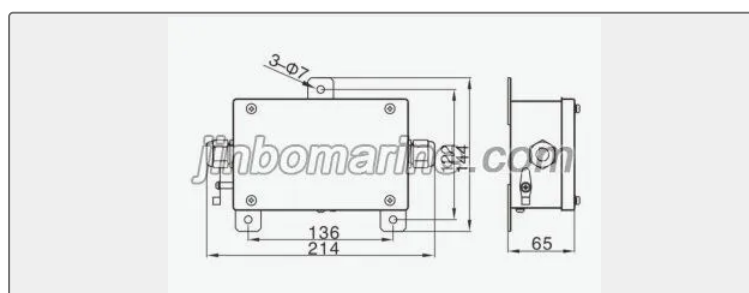
We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Marine Automatic Telephone System	Model / SKU	AQ-1-Safety-Barrier
Standard	EN	Weight / Size	IP44 Weight:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China AQ-1 Safety Barrier:

AQ-1 Safety Barrier


 0.074808s

Uo:31.8V Io:84mA Po:0.67W

Co:0.482 μ F Lo:20mH L/R=213

Ambient temperature: -10°C ~ +50°C.

Color: Black (RAL9005)

IP class: IP44

Weight: 1.2Kg

Power:0.84W

Explosion-proof mark: [EXib] II B

Stuffing box cable entrance hole size: 2- Φ 12mm