MARINE COMMUNICATION AND NAVIGATION EQUIPMENT

Automatic Battery Charger

Automatic Battery Charger Feature 1. Microcomputor system control 2. Short-circuit Protection 3. Overload Protection 4. The limit of Voltage and current can be manually adjusted. 5. Acutal w...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Marine Communication And Navigation Equipment
Standard	EN
Weight / Size	Automatic Battery Charger Size MODEL SY-35A SY-50A SY-80A Input Voltage ...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications

Category	Marine Communication And Navigation Equipment	**Model / SKU**	Automatic-Battery-Charger
Standard	EN	**Weight / Size**	Automatic Battery Charger Size MODEL SY-35A SY-50A SY-80A Input Voltage AC180-260V Efficiency >80% Battery Type Lead Acid Battery Cuurent Range 0-42A 0-50A 0-80A Voltage Range 27.5-31V Working Temparature -10-70 Degree C Storage Temperature -40-80 Degree C Relative Humidity <=85%
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	**Warranty**	12 Months unless specified otherwise
Origin	China		

Automatic Battery Charger Feature

1. Microcomputor system control
2. Short-circuit Protection
3. Overload Protection
4. The limit of Voltage and current can be manually adjusted.
5. Acutal working voltage and current display in digital monitor during the charging.
6. Portbale and Powerful.
7. Elegant Appearance and Easy Operation.
8. Applied to 24V DC Storage Battery.

Automatic Battery Charger Size

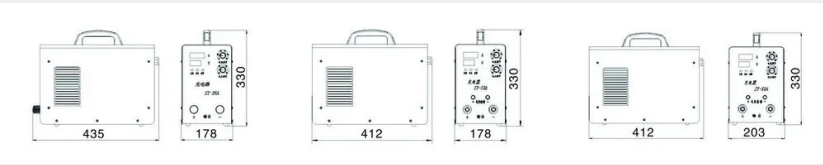

MODEL	SY-35A	SY-50A	SY-80A
Input Voltage	AC180-260V		
Efficiency	>80%		
Battery Type	Lead Acid Battery		
Cuurent Range	0-42A	0-50A	0-80A
Voltage Range	27.5-31V		
Working Temparature	-10-70 Degree C		
Storage Temperature	-40-80 Degree C		
Relative Humidity	<=85%		