

# Jinbo Marine

Marine & Offshore Equipment Datasheet


**PRODUCT DATASHEET**

MARINE COMMUNICATION AND NAVIGATION EQUIPMENT

## Automatic Battery Charger

Automatic Battery Charger Feature 1. Microcomputer system control 2. Short-circuit Protection 3. Overload Protection 4. The limit of Voltage and current can be manually adjusted. 5. Actual w...

- ISO9001 Supplier
- Class Certificate
- Export Supply



### Key Highlights

<b>Category</b>	Marine Communication And Navigation Equipment
<b>Standard</b>	EN
<b>Weight / Size</b>	Automatic Battery Charger Size MODEL SY-35A SY-50A SY-80A Input Voltage ...
<b>Certificate</b>	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS


We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
<b>Category</b>	Marine Communication And Navigation Equipment	<b>Model / SKU</b>	Automatic-Battery-Charger
<b>Standard</b>	EN	<b>Weight / Size</b>	Automatic Battery Charger Size MODEL SY-35A SY-50A SY-80A Input Voltage AC180-260V Efficiency >80% Battery Type Lead Acid Battery Cuurent Range 0-42A 0-50A 0-80A Voltage Range 27.5-31V Working Temperature -10-70 Degree C Storage Temperature -40-80 Degree C Relative Humidity <=85%
<b>Certificate</b>	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	<b>Warranty</b>	12 Months unless specified otherwise
<b>Origin</b>	China		

## Automatic Battery Charger Feature

1. Microcomputer system control
2. Short-circuit Protection
3. Overload Protection
4. The limit of Voltage and current can be manually adjusted.
5. Actual working voltage and current display in digital monitor during the charging.
6. Portable and Powerful.
7. Elegant Appearance and Easy Operation.
8. Applied to 24V DC Storage Battery.

## Automatic Battery Charger Size

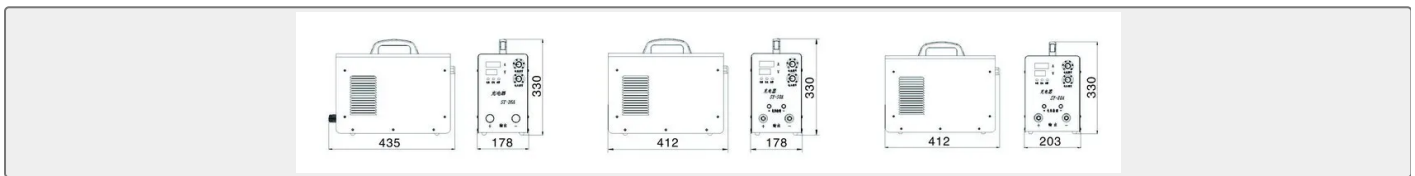

MODEL	SY-35A	SY-50A	SY-80A
Input Voltage	AC180-260V		
Efficiency	>80%		
Battery Type	Lead Acid Battery		
Current Range	0-42A	0-50A	0-80A
Voltage Range	27.5-31V		
Working Temperature	-10-70 Degree C		
Storage Temperature	-40-80 Degree C		
Relative Humidity	<=85%		