

# Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

## CHAIN SLING

# BLT081 Side Load Lifting Point

BLT081 Side Load Lifting Point Metric Thread: ITEM NO WLL/T M E A B...

ISO9001 Supplier

Class Certificate

Export Supply



## Key Highlights


<b>Category</b>	Chain Sling
<b>Weight / Size</b>	ITEM NO WLL/T M E A B C D F G L N S SW Locking Torque /Nm Kg BLT081-M8 0...
<b>Certificate</b>	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS


We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	Chain Sling	Model / SKU	BLT081-Side-Load-Lifting-Point
Weight / Size	ITEM NO WLL/T M E A B C D F G L N S SW Locking Torque /Nm Kg BLT081-M8 0.3 M8x1.25 11 34 37 42 14 98.5 57 42.5 31 6 13 10-40 0.5 BLT081-M10 0.63 M10x1.5 16 34 37 44 14 98.5 57 40.5 31 6 16 10-40 0.5 BLT081-M12 1 M12x1.75 18 34 37 45 14 98.5 57 39.5 31 8 18 15-40 0.5 BLT081- M14 1.2 M14x2.0 21 34 37 48 14 98.5 57 36.5 31 10 24 30-100 0.5 BLT081-M16 1.5 M16x2.0 24 34 37 48 14 98.5 57 36.5 31 10 24 45-130 0.5 BLT081-M18 2 M18x2.5 26 50 54 58 16.5 143 82 68.5 45 12 30 100-170 1.3 BLT081-M20 2.5 M20x2.5 30 50 54 58 16.5 143 82 68.5 45 12 30 100-170 1.3 BLT081-M22 3 M22x2.5 30 50 54 61 16.5 143 82 65.5 45 14 36 100-170 1.4 BLT081-M24 4 M24x3.0 36 50 54 61 16.5 143 82 65.5 45 14 36 190- 280 1.4 BLT081-M27 4 M27x3.0 38 60 65 82 22 170 99 66 59 17 46 250-500 3 BLT081-M30 5 M30x3.5 48 60 65 82 22 170 99 66 59 17 46 270-600 3 BLT081- M33 6 M33x3.5 54 60 65 85 22 170 99 63 59.5 22 55 270-600 3 BLT081-M36S 7 M36x4.0 54 60 65 85 22 170 99 63 59.5 22 55 270-600 3.2 BLT081-M36B 8 M36x4.0 62 77 85 104 27 226.5 123 95.5 69 22 55 270-600 6 BLT081-M39 8 M39x4.0 62 77 85 104 27 226.5 123 95.5 69 22 55 350-800 6	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

## China BLT081 Side Load Lifting Point:

BLT081 Side Load Lifting Point



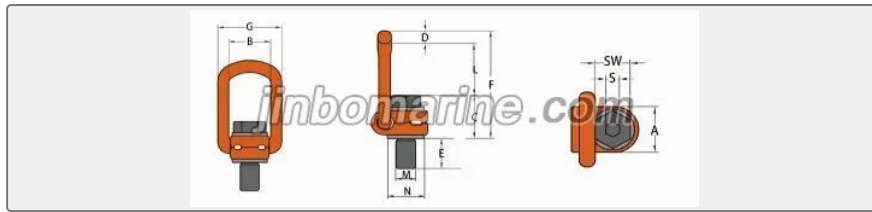

Metric Thread:

ITEM NO	WLL/T	M	E	A	B	C	D	F	G	L	N	S	SW	Locking Torque / Nm	Kg
BLT081-M8	0.3	M8x1.25	11	34	37	42	14	98.5	57	42.5	31	6	13	1040	0.5
BLT081-M10	0.63	M10x1.5	16	34	37	44	14	98.5	57	40.5	31	6	16	1040	0.5
BLT081-M12	1	M12x1.75	18	34	37	45	14	98.5	57	39.5	31	8	18	1540	0.5
BLT081-M14	1.2	M14x2.0	21	34	37	48	14	98.5	57	36.5	31	10	24	3010	0.5
BLT081-M16	1.5	M16x2.0	24	34	37	48	14	98.5	57	36.5	31	10	24	45130	0.5

BLT081-M18	2	M18x2.5	26	50	54	58	16.5	143	82	68.5	45	12	30	1000-1700	1.3
BLT081-M20	2.5	M20x2.5	30	50	54	58	16.5	143	82	68.5	45	12	30	1000-1700	1.3
BLT081-M22	3	M22x2.5	30	50	54	61	16.5	143	82	65.5	45	14	36	1000-1700	1.4
BLT081-M24	4	M24x3.0	36	50	54	61	16.5	143	82	65.5	45	14	36	1900-2800	1.4
BLT081-M27	4	M27x3.0	38	60	65	82	22	170	99	66	59	17	46	2500-5000	3
BLT081-M30	5	M30x3.5	48	60	65	82	22	170	99	66	59	17	46	2700-6000	3
BLT081-M33	6	M33x3.5	54	60	65	85	22	170	99	63	59.5	22	55	2700-6000	3

BLT081-M36S	7	M36x4 .0	54	60	65	85	22	170	99	63	59.5	22	55	2 7 0 - 6 0 0	3.2
BLT081-M36B	8	M36x4 .0	62	77	85	104	27	226. 5	123	95.5	69	22	55	2 7 0 - 6 0 0	6
BLT081-M39	8	M39x4 .0	62	77	85	104	27	226. 5	123	95.5	69	22	55	3 5 0 - 8 0 0	6