

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

CHAIN SLING

BLT082S Heavy Duty Hoist Ring-S

BLT082S Heavy Duty Hoist Ring-S Metric Thread: ITEM NO. WLL/T M Dimensional Parameters/mm ...

ISO9001 Supplier

Class Certificate


Export Supply



Key Highlights

Category	Chain Sling
Standard	EN
Weight / Size	WLL/T M Dimensional Parameters/mm Locking Torque/Nm Kg E A B C D F G H R...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.




Technical Specifications			
Category	Chain Sling	Model / SKU	BLT082S-Heavy-Duty-Hoist-Ring-S
Standard	EN	Weight / Size	WLL/T M Dimensional Parameters/mm Locking Torque/Nm Kg E A B C D F G H R S SW BLT082S-M6 0.2 M6x1.0 12 33 58 36 10 84 30 10 15.5 6 13 10 0.3 BLT082S-M8 0.5 M8x1.25 12 33 58 36 10 84 30 10 15.5 6 13 10 0.3 BLT082S-M10 0.7 M10x1.5 15 33 58 36 10 84 30 10 15.5 6 13 10 0.3 BLT082S-M12 1 M12x1.75 20 33 58 36 10 84 30 10 15.5 6 13 15 0.35 BLT082S-M14 1.5 M14x2.0 21 50 90 50 15 126 44.5 18 22 8 19 30 1.15 BLT082S-M16 2 M16x2.0 24 50 90 50 15 126 44.5 18 22 8 19 50 1.2 BLT082S-M18 2.5 M18x2.5 26 65 117 66 22 163 58 21 29.5 10 27 70 2.6 BLT082S- M20 3 M20x2.5 30 65 117 66 22 163 58 21 29.5 10 27 100 2.65 BLT082S-M22 4 M22x2.5 33 65 117 66 22 163 58 21 29.5 10 27 100 2.7 BLT082S-M24 5 M24x3.0 36 65 117 66 22 163 58 21 29.5 10 27 160 2.75 BLT082S-M27 5.6 M27x3.0 38 87 147 80 26.5 206 76.5 28 35.5 14 34 200 5.45 BLT082S-M30 7.8 M30x3.5 48 87 147 80 26.5 206 76.5 28 35.5 14 34 500 5.8 BLT082S-M33 8.3 M33x3.5 48 87 147 80 26.5 206 76.5 28 35.5 14 34 500 5.7
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China BLT082S Heavy Duty Hoist Ring-S:

BLT082S Heavy Duty Hoist Ring-S



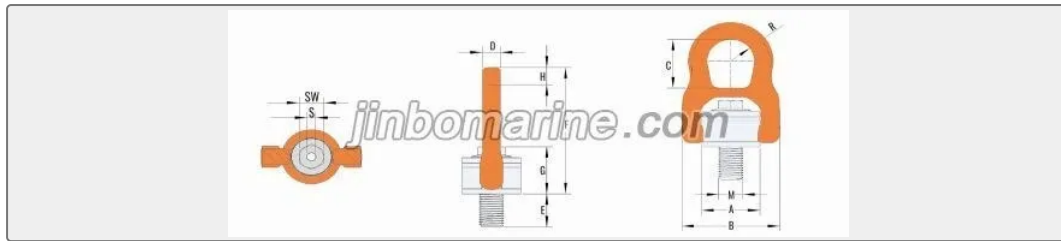

Metric Thread:

ITEM NO.	WLL/T	M	Dimensional Parameters/mm											Locking Torque /Nm	Kg
			E	A	B	C	D	F	G	H	R	S	S W		
BLT082S-M6	0.2	M6x1.0	1 2	3 3	58	3 6	10	8 4	30	1 0	15 .5	6	13	10	0.3
BLT082S-M8	0.5	M8x1.25	1 2	3 3	58	3 6	10	8 4	30	1 0	15 .5	6	13	10	0.3
BLT082S-M10	0.7	M10x1.5	1 5	3 3	58	3 6	10	8 4	30	1 0	15 .5	6	13	10	0.3
BLT082S-M12	1	M12x1.75	2 0	3 3	58	3 6	10	8 4	30	1 0	15 .5	6	13	15	0.35
BLT082S-M14	1.5	M14x2.0	2 1	5 0	90	5 0	15	1 2 6	44 .5	1 8	22	8	19	30	1.15
BLT082S-M16	2	M16x2.0	2 4	5 0	90	5 0	15	1 2 6	44 .5	1 8	22	8	19	50	1.2
BLT082S-M18	2.5	M18x2.5	2 6	6 5	11 7	6 6	22	1 6 3	58	2 1	29 .5	1 0	27	70	2.6
BLT082S-M20	3	M20x2.5	3 0	6 5	11 7	6 6	22	1 6 3	58	2 1	29 .5	1 0	27	100	2.65
BLT082S-M22	4	M22x2.5	3 3	6 5	11 7	6 6	22	1 6 3	58	2 1	29 .5	1 0	27	100	2.7
BLT082S-M24	5	M24x3.0	3 6	6 5	11 7	6 6	22	1 6 3	58	2 1	29 .5	1 0	27	160	2.75
BLT082S-M27	5.6	M27x3.0	3 8	8 7	14 7	8 0	26 .5	2 0 6	76 .5	2 8	35 .5	1 4	34	200	5.45
BLT082S-M30	7.8	M30x3.5	4 8	8 7	14 7	8 0	26 .5	2 0 6	76 .5	2 8	35 .5	1 4	34	500	5.8

BLT082S-M33	8.3	M33x3.5	4 8	8 7	14 7	8 0	26 .5	2 0 6	76 .5	2 8	35 .5	1 4	34	500	5.7
-------------	-----	---------	--------	--------	---------	--------	----------	-------------	----------	--------	----------	--------	----	-----	-----