

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

CHAIN SLING

BLT083 Swivel Hoist Ring With Unc Thread

ISO9001 Supplier

Class Certificate

Export Supply

BLT083 Swivel Hoist Ring With Unc Thread Drawing BLT083 Swivel Hoist Ring With Unc Thread Parameters ITEM NO. WLL/T THREAD/TPI ...



Key Highlights

Category	Chain Sling
Weight / Size	WLL/T THREAD/TPI WEIGHT/KG BLT083-5/16 0.3 5/16-18UNC 0.5 BLT083-3/8 0.1...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS


We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.



Technical Specifications			
Category	Chain Sling	Model / SKU	BLT083-Swivel-Hoist-Ring-With-Unc-Thread
Weight / Size	WLL/T THREAD/TPI WEIGHT/KG BLT083-5/16 0.3 5/16-18UNC 0.5 BLT083-3/8 0.15 3/8-16UNC 0.5 BLT083-1/2 0.6 1/2-13UNC 0.5 BLT083-5/8 1.3 5/8-11UNC 0.5 BLT083-3/4 1.8 3/4-10UNC 2.5 BLT083-7/8 2 7/8-9UNC 2.5 BLT083-1 3.5 1-8UNC 2.5 BLT083-1 1/4 6 1 1/4-7UNC 4 BLT083-1 1/2 8 1 1/2-6UNC 4 BLT083-1 3/4 12 1 3/4-5UNC 6 BLT083-2 14 2-4.5UNC 11 BLT083-2 1/4 16 2 1/4-4.5UNC 11 BLT083-1 1/2 16 2 1/2-4UNC 11 BLT083-3 31.5 3-4UNC 31 BLT083-3 1/2 40 3 1/2-4UNC 34 BLT083-4 40 4-4UNC 36.5 ITEM NO.	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS	■ BLT083 Swivel Hoist Ring With Unc Thread Drawing	■ BLT083 Swivel Hoist Ring With Unc Thread Parameters
-----------------	--	---

BLT083 Swivel Hoist Ring With Unc Thread Drawing

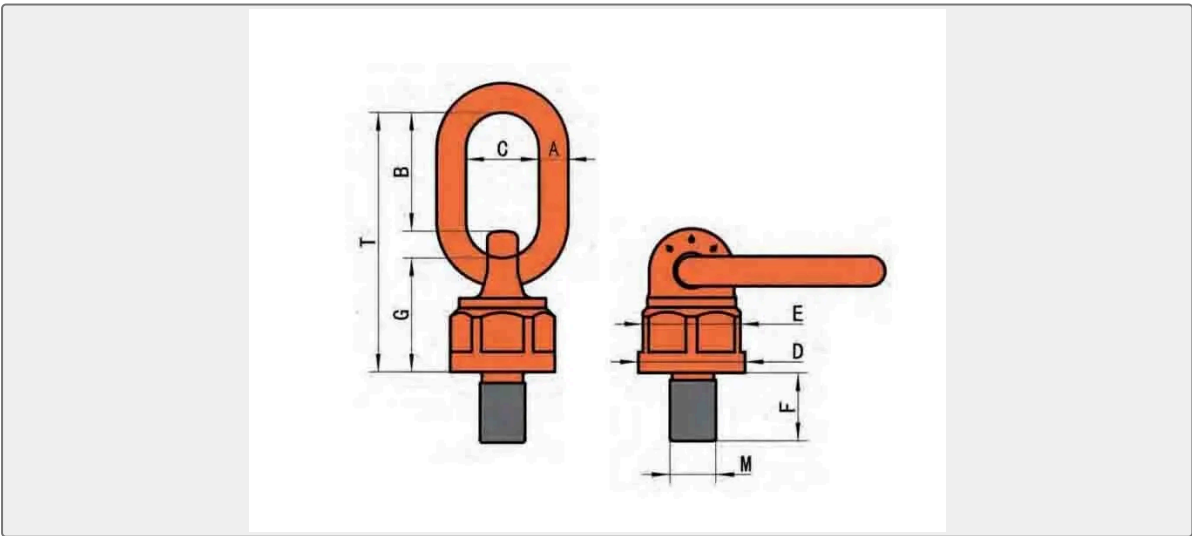

BLT083 Swivel Hoist Ring With Unc Thread Parameters

ITEM NO.	WLL/T	THREAD/TPI	WEIGHT/KG
			0.068442s

BLT083-5/16	0.3	5/16-18UNC	0.5
BLT083-3/8	0.15	3/8-16UNC	0.5
BLT083-1/2	0.6	1/2-13UNC	0.5
BLT083-5/8	1.3	5/8-11UNC	0.5
BLT083-3/4	1.8	3/4-10UNC	2.5
BLT083-7/8	2	7/8-9UNC	2.5
BLT083-1	3.5	1-8UNC	2.5
BLT083-1 1/4	6	1 1/4-7UNC	4
BLT083-1 1/2	8	1 1/2-6UNC	4
BLT083-1 3/4	12	1 3/4-5UNC	6
BLT083-2	14	2-4.5UNC	11
BLT083-2 1/4	16	2 1/4-4.5UNC	11
BLT083-1 1/2	16	2 1/2-4UNC	11
BLT083-3	31.5	3-4UNC	31
BLT083-3 1/2	40	3 1/2-4UNC	34
BLT083-4	40	4-4UNC	36.5

ITEM NO.	TECHNICAL PARAMETERS/MM			
	F	A	B	C
BLT083-5/16	12	12	44	30
BLT083-3/8	12	12	44	30
BLT083-1/2	19	12	44	30
BLT083-5/8	31.8	12	44	30
BLT083-3/4	38.1	20	67	40
BLT083-7/8	38.1	20	67	40
BLT083-1	38.1	20	67	40
BLT083-1 1/4	50	22	95	51
BLT083-1 1/2	54	22	95	51
BLT083-1 3/4	68	26	108	65
BLT083-2	84	32	120	70
BLT083-2 1/4	84	32	120	70
BLT083-1 1/2	95	32	120	70
BLT083-3	108	46	136	90



BLT083-3 1/2	135	46	136	90
BLT083-4	135	46	136	90

ITEM NO.	TECHNICAL PARAMETERS/MM			
	D	E	G	T
BLT083-5/16	40	37	46	98
BLT083-3/8	40	37	46	98
BLT083-1/2	40	37	46	98
BLT083-5/8	40	37	46	98
BLT083-3/4	70	64.3	75	160
BLT083-7/8	70	64.3	75	160
BLT083-1	70	64.3	75	160
BLT083-1 1/4	79	74	91	206
BLT083-1 1/2	79	74	91	206
BLT083-1 3/4	93	85	100.5	230.5
BLT083-2	105	95	132	278
BLT083-2 1/4	105	95	132	278
BLT083-1 1/2	105	95	132	278
BLT083-3	172	155	172	357
BLT083-3 1/2	172	155	172	357
BLT083-4	172	155	172	357