

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

CHAIN SLING

BLT083S Universal Hoist Ring-S

BLT083S Universal Hoist Ring-S Metric Thread: ITEM NO. WLL/T M Dimensional Parameters/mm ...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Chain Sling
Standard	EN
Weight / Size	WLL/T M Dimensional Parameters/mm Locking Torque/Nm Kg E A±2 B±3 C D F±3...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.




Technical Specifications			
Category	Chain Sling	Model / SKU	BLT083S-Universal-Hoist-Ring-S
Standard	EN	Weight / Size	WLL/T M Dimensional Parameters/mm Locking Torque/Nm Kg E A±2 B±3 C D F±3 G K BLT083S-M8 0.4 M8x1.25 12 30 43 53 13 96 42 37 10-40 0.48 BLT083S-M10 0.6 M10x1.5 19 30 43 53 13 96 42 37 10-40 0.49 BLT083S-M12S 0.7 M12x1.75 19 30 43 53 13 96 42 37 15-40 0.49 BLT083S-M14 1.25 M14x2.0 31.8 30 43 53 13 96 42 37 30-100 0.51 BLT083S-M16S 1.5 M16x2.0 31.8 30 43 53 13 96 42 37 45-130 0.52 BLT083S-M12B 1.05 M12x1.75 19 34 54 70.5 16 124.5 61 54.5 15-40 1.2 BLT083S-M16B 1.9 M16x2.0 30 34 54 70.5 16 124.5 61 54.5 45-130 1.2 BLT083S-M18S 1.9 M18x2.5 30 34 54 70.5 16 124.5 61 54.5 100-170 1.2 BLT083S- M20S 2 M20x2.5 30 34 54 70.5 16 124.5 61 54.5 100-170 1.3 BLT083S-M22S 2 M22x2.5 30 34 54 70.5 16 124.5 61 54.5 100-170 1.3 BLT083S-M24S 3.15 M24x3.0 30 34 54 70.5 16 124.5 61 54.5 100-170 3 BLT083S-M18B 2 M18x2.5 38.1 40 68 88 20 156 72 64.5 100-170 2.2 BLT083S-M20B 2.5 M20x2.5 38.1 40 68 88 20 156 72 54.5 100-170 2.2
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China BLT083S Universal Hoist Ring-S:

BLT083S Universal Hoist Ring-S



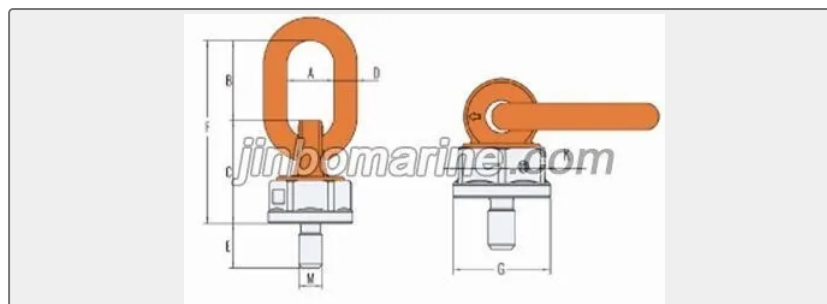

Metric Thread:

ITEM NO.	WLL/T	M	Dimensional Parameters/mm								Locking Torque/ Nm	Kg
			E	A±2	B±3	C	D	F±3	G	K		
BLT083S-M8	0.4	M8x1.25	12	30	43	53	13	96	42	37	10-40	0.48
BLT083S-M10	0.6	M10x1.5	19	30	43	53	13	96	42	37	10-40	0.49
BLT083S-M12S	0.7	M12x1.75	19	30	43	53	13	96	42	37	15-40	0.49
BLT083S-M14	1.25	M14x2.0	31.8	30	43	53	13	96	42	37	30-100	0.51
BLT0835-M16S	1.5	M16x2.0	31.8	30	43	53	13	96	42	37	45-130	0.52
BLT083S-M12B	1.05	M12x1.75	19	34	54	70.5	16	124.5	61	54.5	15-40	1.2
BLT0835-M16B	1.9	M16x2.0	30	34	54	70.5	16	124.5	61	54.5	45-130	1.2
BLT083S-M18S	1.9	M18x2.5	30	34	54	70.5	16	124.5	61	54.5	100-170	1.2
BLT083S-M20S	2	M20x2.5	30	34	54	70.5	16	124.5	61	54.5	100-170	1.3
BLT083S-M22S	2	M22x2.5	30	34	54	70.5	16	124.5	61	54.5	100-170	1.3
BLT083S-M24S	3.15	M24x3.0	30	34	54	70.5	16	124.5	61	54.5	100-170	3
BLT0835-M18B	2	M18x2.5	38.1	40	68	88	20	156	72	64.5	100-170	2.2
BLT083S-M20B	2.5	M20x2.5	38.1	40	68	88	20	156	72	54.5	100-170	2.2