



CHAIN SLING

BLT084 Eye Type Rotary Ring Unc Thread With Stopplate

- ISO9001 Supplier
- Class Certificate
- Export Supply

BLT084 Eye Type Rotary Ring Unc Thread With Stopplate 1.BLT084 is equipped with a locking wrench, and BLT094 is equipped with a stop screw, which can be easily installed after being locked, and the lifting ring can...

	<p>Key Highlights</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="background-color: #1a3d4d; color: white; padding: 5px;">Category</td> <td style="padding: 5px;">Chain Slings</td> </tr> <tr> <td style="background-color: #1a3d4d; color: white; padding: 5px;">Standard</td> <td style="padding: 5px;">DIN</td> </tr> <tr> <td style="background-color: #1a3d4d; color: white; padding: 5px;">Material</td> <td style="padding: 5px;">4.Alloy steel, electrostatic spraying The bolts are made of alloy steel ...</td> </tr> <tr> <td style="background-color: #1a3d4d; color: white; padding: 5px;">Weight / Size</td> <td style="padding: 5px;">2.4 times safety factor Different loads can be lifted in different direc...</td> </tr> <tr> <td style="background-color: #1a3d4d; color: white; padding: 5px;">Certificate</td> <td style="padding: 5px;">ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS</td> </tr> </table> <p style="padding: 5px;">We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.</p>	Category	Chain Slings	Standard	DIN	Material	4.Alloy steel, electrostatic spraying The bolts are made of alloy steel ...	Weight / Size	2.4 times safety factor Different loads can be lifted in different direc...	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Category	Chain Slings										
Standard	DIN										
Material	4.Alloy steel, electrostatic spraying The bolts are made of alloy steel ...										
Weight / Size	2.4 times safety factor Different loads can be lifted in different direc...										
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS										



Technical Specifications			
Category	Chain Sling	Model / SKU	BLT084-Eye-Type-Rotary-Ring-Unc-Thread-With-Stopplate
Standard	DIN	Material	4.Alloy steel, electrostatic spraying The bolts are made of alloy steel 42CrMo, the tensile strength before heat treatment is 1080Mpa, the mechanical properties are improved after the material is changed, and the surface of the ring is sprayed with electrostatic spraying after boiling to improve the surface anti-corrosion ability.
Weight / Size	2.4 times safety factor Different loads can be lifted in different directions, but 4 times safety factor is guaranteed 3.Complete specifications The thread specifications are complete, the rated load range is wide (M8-M48, 0.32T-32T), and the thread size can be customized according to customer requirements.	Surface	4.Alloy steel, electrostatic spraying The bolts are made of alloy steel 42CrMo, the tensile strength before heat treatment is 1080Mpa, the mechanical properties are improved after the material is changed, and the surface of the ring is sprayed with electrostatic spraying after boiling to improve the surface anti-corrosion ability.
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

CONTENTS

- BLT084 Eye Type Rotary Ring Unc Thread With Stopplate
- BLT084 Eye Type Rotary Ring Unc Thread With Stopplate Parameters
- BLT084 Eye Type Rotary Ring Unc Thread With Stopplate Drawing

BLT084 Eye Type Rotary Ring Unc Thread With Stopplate

1.BLT084 is equipped with a locking wrench, and BLT094 is equipped with a stop screw, which can be easily installed after being locked, and the lifting ring can be rotated after loosening.

2.4 times safety factor

Different loads can be lifted in different directions, but 4 times safety factor is guaranteed

3.Complete specifications


The thread specifications are complete, the rated load range is wide (M8-M48, 0.32T-32T), and the thread size can be customized according to customer requirements.

4.Alloy steel, electrostatic spraying

The bolts are made of alloy steel 42CrMo, the tensile strength before heat treatment is 1080Mpa, the mechanical properties are improved after the material is changed, and the surface of the ring is sprayed with electrostatic spraying after boiling to improve the surface anti-corrosion ability.




BLT084 Eye Type Rotary Ring Unc Thread With Stopplate Drawing

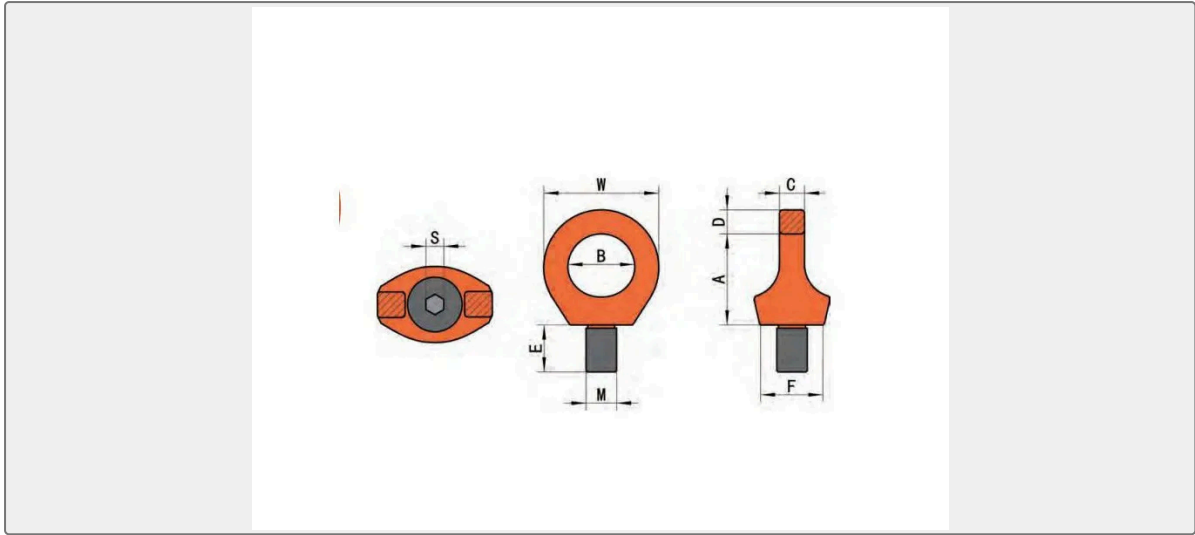

BLT084 Eye Type Rotary Ring Unc Thread With Stopplate Parameters

ITEM NO.	WLL/T		TPI	WEIGHT /KG
	X	(Z)		
BLT084-5/16	0.3	(1)	5/16-18UNC	0.2
BLT084-3/8	0.4	(1)	3/8-16UNC	0.2
BLT084-7/16	0.75	(2)	7/16-14UNC	0.3
BLT084-1/2	0.75	(2)	1/2-13UNC	0.3
BLT084-5/8	1.5	(4)	5/8-11UNC	0.5
BLT084-3/4	2.3	(6)	3/4-10UNC	0.7
BLT084-7/8	2.3	(6)	7/8-9UNC	0.8
BLT084-1	3.2	(8)	1-8UNC	1.2
BLT084-1 1/4	4.5	(12)	1 1/4-7UNC	2.2
BLT084-1 1/2	9	(24)	1 1/2-6UNC	6.5
BLT084-1 3/4	12	(32)	1 3/4-5UNC	10
ITEM NO.	TECHNICAL PARAMETERS/MM			
	E	A	B	C
BLT084-5/16	12	35	25	8.5
BLT084-3/8	15	35	25	8.5
BLT084-7/16	18	42	30	10
BLT084-1/2	18	42	30	10
BLT084-5/8	24	50	35	16
BLT084-3/4	30	58	40	16



BLT084-7/8	30	58	40	16
BLT084-1	36	72.5	48	19
BLT084-1 1/4	45	88.5	60	25
BLT084-1 1/2	63	121.5	82	37
BLT084-1 3/4	72	138.5	94	42
ITEM NO.	TECHNICAL PARAMETERS/MM			
	D	F	S	W
BLT084-5/16	11	28	6.5	47
BLT084-3/8	11	28	6.5	47
BLT084-7/16	13	34	8.5	56
BLT084-1/2	13	34	8.5	56
BLT084-5/8	15	42	10.5	65
BLT084-3/4	17.5	50	12.5	75
BLT084-7/8	17.5	50	12.5	75
BLT084-1	21	61	14.5	90
BLT084-1 1/4	26	74	17.5	112
BLT084-1 1/2	28	106	24.5	158
BLT084-1 3/4	43	124	27.5	180