

# Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

CHAIN SLING

## BLT088 Angular Contat Bearing Swivels-OO Style

- ISO9001 Supplier
- Class Certificate
- Export Supply

BLT088 Angular Contat Bearing Swivels-OO Style The rotating rings are made of high-strength and high-toughness special alloy steel forging and finishing, all of which are modulated and heat treated. The design saf...



**Key Highlights**

<b>Category</b>	Chain Sling
<b>Standard</b>	EN
<b>Material</b>	BLT088 Angular Contat Bearing Swivels-OO Style The rotating rings are ma...
<b>Weight / Size</b>	SIZE WLL/T WEIGHT/KG BLT088-007 0.75 0.75 0.5 BLT088-015 1.5 1.5 0.9 BLT...
<b>Certificate</b>	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.



Technical Specifications			
<b>Category</b>	Chain Sling	<b>Model / SKU</b>	BLT088-Angular-Contat-Bearing-Swivels-OO-Style
<b>Standard</b>	EN	<b>Material</b>	BLT088 Angular Contat Bearing Swivels-OO Style The rotating rings are made of high-strength and high-toughness special alloy steel forging and finishing, all of which are modulated and heat treated.
<b>Weight / Size</b>	SIZE WLL/T WEIGHT/KG BLT088-007 0.75 0.75 0.5 BLT088-015 1.5 1.5 0.9 BLT088-030 3 3 2.1 BLT088-050 5 5 4.3 BLT088-085 8.5 8.5 7.3 BLT088-100 10 10 17.0 BLT088-150 15 15 21.2 BLT088-250 25 25 39.0 BLT088-350 35 35 45.8 BLT088-600 60 60 ITEM NO.	<b>Surface</b>	galvanized
<b>Certificate</b>	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	<b>Warranty</b>	12 Months unless specified otherwise
<b>Origin</b>	China		

<b>CONTENTS</b>	<ul style="list-style-type: none"> <li>■ BLT088 Angular Contat Bearing Swivels-OO Style</li> <li>■ BLT088 Angular Contat Bearing Swivels-OO Style Parameters</li> </ul>	<ul style="list-style-type: none"> <li>■ BLT088 Angular Contat Bearing Swivels-OO Style Drawing</li> </ul>
-----------------	---	--

## BLT088 Angular Contat Bearing Swivels-OO Style

The rotating rings are made of high-strength and high-toughness special alloy steel forging and finishing, all of which are modulated and heat treated.


The design safety factor of the rotating ring is 4:1

The independent test load should be twice the safe working load when the rotating ring is tested and certified.

The surface of the rotating ring is galvanized or plastic coated, so that the product can have better corrosion resistance and longevity.

The rotating ring is provided with a grease nipple to facilitate maintenance and make the product have better performance.

## BLT088 Angular Contat Bearing Swivels-OO Style Drawing

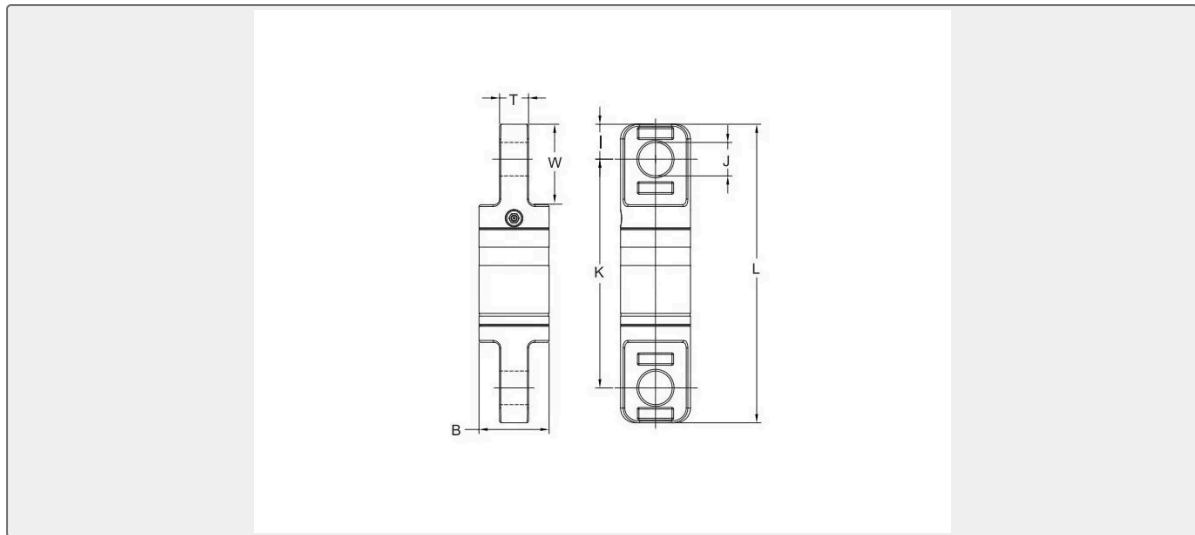

## BLT088 Angular Contat Bearing Swivels-OO Style Parameters

ITEM NO.	SIZE	WLL/T	WEIGHT/KG
BLT088-007	0.75	0.75	0.5
BLT088-015	1.5	1.5	0.9
BLT088-030	3	3	2.1
BLT088-050	5	5	4.3
BLT088-085	8.5	8.5	7.3
BLT088-100	10	10	17.0
BLT088-150	15	15	21.2
BLT088-250	25	25	39.0
BLT088-350	35	35	45.8
BLT088-600	60	60	

ITEM NO.	TECHNICAL PARAMETERS/MM		
	T	J	W
BLT088-007	12	10.5	35
BLT088-015	15	13.5	46
BLT088-030	20	20	57
BLT088-050	26	33	69
BLT088-085	32	37	88
BLT088-100	42	44	104
BLT088-150	49	54	110



BLT088-250	60	66	140
BLT088-350	60	66	140
BLT088-600	75	80	230

ITEM NO.	TECHNICAL PARAMETERS/MM		
	T	J	W
BLT088-007	12	10.5	35
BLT088-015	15	13.5	46
BLT088-030	20	20	57
BLT088-050	26	33	69
BLT088-085	32	37	88
BLT088-100	42	44	104
BLT088-150	49	54	110
BLT088-250	60	66	140
BLT088-350	60	66	140
BLT088-600	75	80	230

ITEM NO.	TECHNICAL PARAMETERS/MM			
	B	K	L	I
BLT088-007	34	102	128	13
BLT088-015	40	112	152	20
BLT088-030	54	160	210	25
BLT088-050	67	203	267	32
BLT088-085	78	250	326	38
BLT088-100	104	310	410	50
BLT088-150	116	320	440	60
BLT088-250	137	405	545	70
BLT088-350	154	405	545	70
BLT088-600	270	670	890	115