

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

CHAIN SLING

BLT094S Key Eye Point-S

BLT094S Key Eye Point-S Metric Thread: ITEM NO. WLL/T M Dimensional Parameters/mm
Loc...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Chain Sling
Standard	EN
Weight / Size	WLL/T M Dimensional Parameters/mm Locking Torque/Nm Kg E A B C D F J H W...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.




Technical Specifications			
Category	Chain Sling	Model / SKU	BLT094S-Key-Eye-Point-S
Standard	EN	Weight / Size	WLL/T M Dimensional Parameters/mm Locking Torque/Nm Kg E A B C D F J H W G S BLT094S-M8 0.3 M8x1.25 12 36.5 25 10 10 25 41 5 44 25 6 10- 40 0.14 BLT094S-M10 0.4 M10x1.5 15 36.5 25 10 10 25 41 5 44 25 6 10-40 0.15 BLT094S-M12 0.75 M12x1.75 18 44.5 30 11 11 33 47 7 52 30 8 15-40 0.23 BLT094S-M14 0.75 M14x2.0 18 44.5 30 11 11 33 47 7 52 30 8 30- 100 0.3 BLT094S-M16 1.5 M16x2.0 24 50.5 35 15 13 36 58 10 61 34 10 45-130 0.39 BLT094S-M18 1.5 M18x2.5 24 50.5 35 15 13 36 58 10 61 34 10 100-170 0.45 BLT094S-M20 2.3 M20x2.5 30 58 40 17 15 44 68 13 70 39 12 100-170 0.65 BLT094S- M22 2.3 M22x2.5 30 58 40 17 15 44 68 13 70 40 12 100-170 0.75 BLT094S-M24 3.2 M24x3.0 36 71 49 20 17.5 53 75 14 84 48 14 190- 280 1.1 BLT094S-M27 3.2 M27x3.0 36 71 49 20 17.5 53 75 14 84 48 14 250-500 1.2 BLT094S-M30 4.5 M30x3.5 45 88 61 25 22 66 95 20 105 60 17 270- 600 2.13 BLT094S-M33 4.5 M33x3.5 45 88 61 25 22 66 95 20 105 60 17 270-600 2.25 BLT094S- M36 7 M36x4.0 54 106 73 30 26.5 76 116 28 126 72 22 270-600 3.7
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China BLT094S Key Eye Point-S:


BLT094S Key Eye Point-S



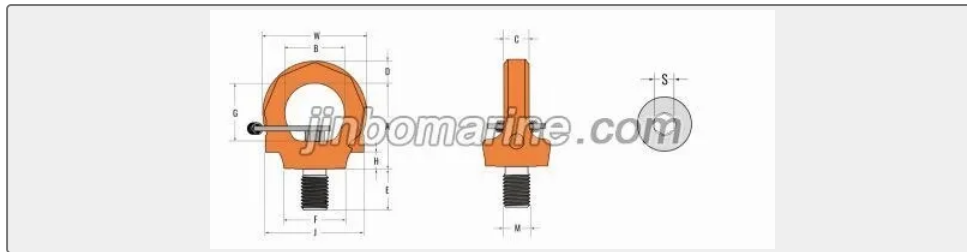

Metric Thread:

ITEM NO.	WLL/T	M	Dimensional Parameters/mm											Locking Torque /Nm	Kg
			E	A	B	C	D	F	J	H	W	G	S		
BLT094S-M8	0.3	M8x1.25	12	36.5	25	10	10	25	41	5	44	25	6	10-40	0.14
BLT094S-M10	0.4	M10x1.5	15	36.5	25	10	10	25	41	5	44	25	6	10-40	0.15
BLT094S-M12	0.75	M12x1.75	18	44.5	30	11	11	33	47	7	52	30	8	15-40	0.23
BLT094S-M14	0.75	M14x2.0	18	44.5	30	11	11	33	47	7	52	30	8	30-100	0.3
BLT094S-M16	1.5	M16x2.0	24	50.5	35	11	13	36	58	10	61	34	10	45-130	0.39
BLT094S-M18	1.5	M18x2.5	24	50.5	35	11	13	36	58	10	61	34	10	100-170	0.45
BLT094S-M20	2.3	M20x2.5	30	58	40	11	15	44	68	11	70	39	12	100-170	0.65
BLT094S-M22	2.3	M22x2.5	30	58	40	11	15	44	68	11	70	40	12	100-170	0.75
BLT094S-M24	3.2	M24x3.0	36	71	49	12	17.5	53	75	11	84	48	14	190-280	1.1
BLT094S-M27	3.2	M27x3.0	36	71	49	12	17.5	53	75	11	84	48	14	250-500	1.2
BLT094S-M30	4.5	M30x3.5	45	88	61	12	22	66	95	12	105	60	17	270-600	2.13
BLT094S-M33	4.5	M33x3.5	45	88	61	12	22	66	95	12	105	60	17	270-600	2.25
BLT094S-M36	7	M36x4.0	54	106	73	13	26.5	76	116	12	126	72	22	270-600	3.7



0.076401s