


CHAIN SLING

BLT095 Concrete Precast Element Lifting

- ISO9001 Supplier
- Class Certificate
- Export Supply

BLT095 Concrete Precast Element Lifting Drawing BLT095 Concrete Precast Element Lifting Parameters ITEM NO. WLL/T Weight/kg ...


	<div style="background-color: #1a3d4d; color: white; padding: 5px;">Key Highlights</div> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 20%;">Category</td> <td>Chain Sling</td> </tr> <tr> <td>Standard</td> <td>EN</td> </tr> <tr> <td>Weight / Size</td> <td>WLL/T Weight/kg BLT095-1-1.3 1-1.3 0.89 BLT095-1.5-2.5 1.5-2.5 1.3 BLT09...</td> </tr> <tr> <td>Certificate</td> <td>ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS</td> </tr> </table> <p style="font-size: small; margin-top: 10px;">We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.</p>	Category	Chain Sling	Standard	EN	Weight / Size	WLL/T Weight/kg BLT095-1-1.3 1-1.3 0.89 BLT095-1.5-2.5 1.5-2.5 1.3 BLT09...	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Category	Chain Sling								
Standard	EN								
Weight / Size	WLL/T Weight/kg BLT095-1-1.3 1-1.3 0.89 BLT095-1.5-2.5 1.5-2.5 1.3 BLT09...								
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS								

Technical Specifications			
Category	Chain Sling	Model / SKU	BLT095-Concrete-Precast-Element-Lifting
Standard	EN	Weight / Size	WLL/T Weight/kg BLT095-1-1.3 1-1.3 0.89 BLT095-1.5-2.5 1.5-2.5 1.3 BLT095-3-5 3.0-5 3.24 BLT095-6-10 6.0-10 10.01 BLT095-12-20 12.0-20 2037 BLT095-12-32 32 46.5 ITEM NO.
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

CONTENTS	<ul style="list-style-type: none"> ■ BLT095 Concrete Precast Element Lifting Drawing ■ BLT095 Concrete Precast Element Lifting Parameters
-----------------	---



BLT095 Concrete Precast Element Lifting Drawing

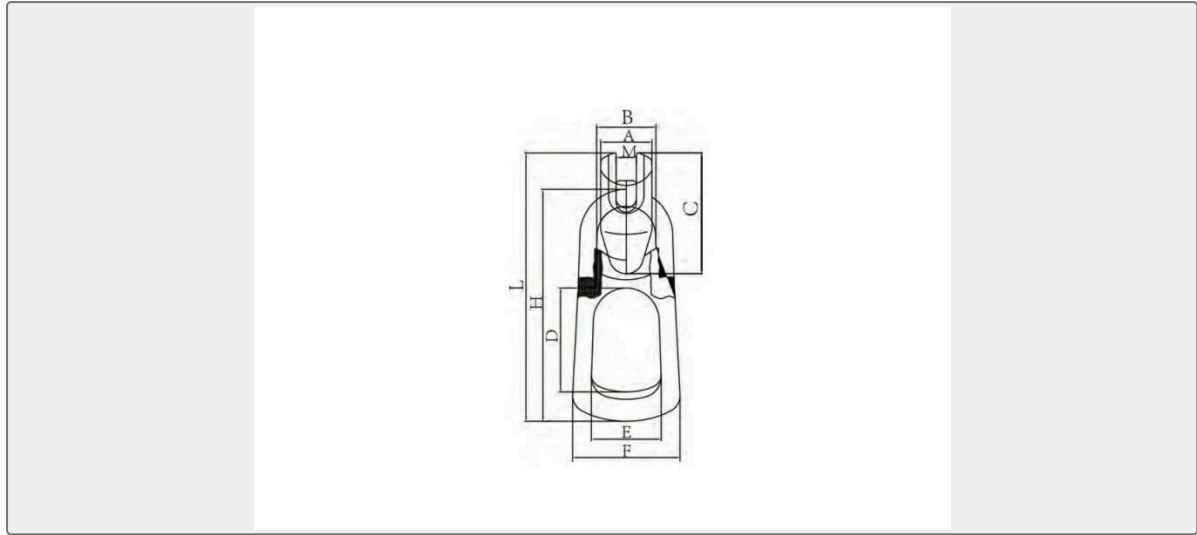

BLT095 Concrete Precast Element Lifting Parameters

ITEM NO.	WLL/T	Weight/kg
BLT095-1-1.3	1-1.3	0.89
BLT095-1.5-2.5	1.5-2.5	1.3
BLT095-3-5	3.0-5	3.24
BLT095-6-10	6.0-10	10.01
BLT095-12-20	12.0-20	2037
BLT095-12-32	32	46.5

ITEM NO.	TECHNICAL PARAMETERS/MM			
	A±1	B±1	C±2	D±1
BLT095-1-1.3	5.2	42	80.4	70.5
BLT095-1.5-2.5	10	49	99	85
BLT095-3-5	20	70	133	88
BLT095-6-10	40	92	176	116
BLT095-12-20	80	114.5	228	133.5
BLT095-12-32	128	172	307	189

ITEM NO.	TECHNICAL PARAMETERS/MM				
	E±1	F±1	H±1	M±2	L±2
BLT095-1-1.3	45	73	157	11.5	181
BLT095-1.5-2.5	57	88	190	12	220
BLT095-3-5	69	110	233	22	



0.072864s

BLT095-6-10	83	161	336.5	30	386
BLT095-12-20	107.5	182	437	42	497
BLT095-12-32	164	272	560	52	661