CHAIN SLING

BLT118 Safe Rotating Lifting Ring

BLT118 Safe Rotating Lifting Ring Metric Thread: ITEM NO. WLL/T M Dimensional Parameters/mm ...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights


Category	Chain Sling
Standard	EN
Weight / Size	WLL/T M Dimensional Parameters/mm Locking Torque/Nm Kg E A B C D F G H R...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	Chain Sling	**Model / SKU**	BLT118-Safe-Rotating-Lifting-Ring
Standard	EN	**Weight / Size**	WLL/T M Dimensional Parameters/mm Locking Torque/Nm Kg E A B C D F G H R S SW BLT118-M6 0.2 M6x1.0 12 33 55 40 11.5 80 30 9.5 17.5 6 13 10 0.3 BLT118-M8 0.5 M8x1.25 12 33 55 40 11.5 80 30 9.5 17.5 6 13 10 0.3 BLT118-M10 0.7 M10x1.5 15 33 55 40 11.5 80 30 9.5 17.5 6 13 10 0.3 BLT118-M12 1 M12x1.75 20 33 55 40 11.5 80 30 9.5 17.5 6 13 15 0.3 BLT118-M14 1.5 M14x2.0 21 50 86 56 16.5 115.5 44.5 15 27 8 19 30 0.7 BLT118-M16 2 M16x2.0 24 50 86 56 16.5 115.5 44.5 15 27 8 19 50 1 BLT118-M18 2.5 M18x2.5 26 65 113 82 25 161 58 21 34.5 10 27 70 1.8 BLT118-M20 3 M20x2.5 30 65 113 82 25 161 58 21 34.5 10 27 100 2 BLT118-M22 4 M22x2.5 33 65 113 82 25 161 58 21 34.5 10 27 100 2.3 BLT118-M24 5 M24x3.0 36 65 113 82 25 161 58 21 34.5 10 27 160 2.6 BLT118-M27 5.6 M27x3.0 38 87 145 98 30 204 76.5 29 45.5 14 34 200 4.2 BLT118-M30 7.8 M30x3.5 48 87 145 98 30 204 76.5 29 45.5 14 34 500 4.5 BLT118M33 8.3 M33x3.5 48 87 145 98 30 204 76.5 29 45.5 14 34 500 5.2 BLT118-M36S 9 M36x4.0 54 87 145 98 30 204 76.5 29 45.5 14 34 500 5.7 BLT118-M36B 12.5 M36x4.0 56 110 184 118 38 251 96.5 36 57 19 46 600 11 BLT118-M39 13.8 M39x4.0 56 110 184 118 38 251 96.5 36 57 19 46 600 10.5 BLT118-M42 15.6 M42x4.5 63 110 184 118 38 251 96.5 36 57 19 46 600 11.2
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	**Warranty**	12 Months unless specified otherwise
Origin	China		

China BLT118 Safe Rotating Lifting Ring:

BLT118 Safe Rotating Lifting Ring

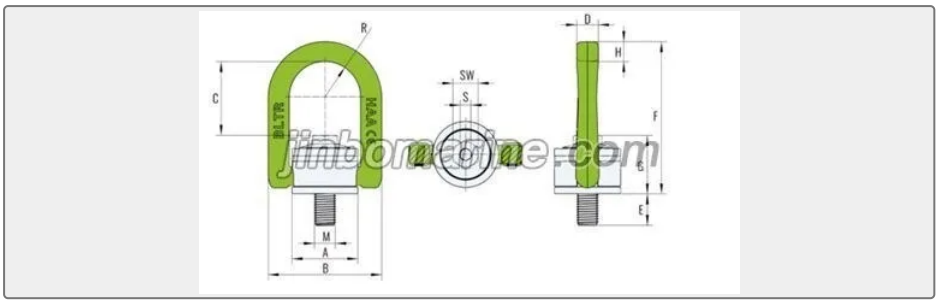

Metric Thread:

ITEM NO.	WLL/T	M	Dimensional Parameters/mm											Locking Torque /Nm	Kg
			E	A	B	C	D	F	G	H	R	S	SW		
BLT118-M6	0.2	M6x1.0	12	33	55	40	11.5	80	30	9.5	17.5	6	13	10	0.3
BLT118-M8	0.5	M8x1.25	12	33	55	40	11.5	80	30	9.5	17.5	6	13	10	0.3
BLT118-M10	0.7	M10x1.5	15	33	55	40	11.5	80	30	9.5	17.5	6	13	10	0.3
BLT118-M12	1	M12x1.75	20	33	55	40	11.5	80	30	9.5	17.5	6	13	15	0.3
BLT118-M14	1.5	M14x2.0	21	50	86	56	16.5	115.5	44.5	15	27	8	19	30	0.7
BLT118-M16	2	M16x2.0	24	50	86	56	16.5	115.5	44.5	15	27	8	19	50	1
BLT118-M18	2.5	M18x2.5	26	65	113	82	25	161	58	21	34.5	10	27	70	1.8
BLT118-M20	3	M20x2.5	30	65	113	82	25	161	58	21	34.5	10	27	100	2
BLT118-M22	4	M22x2.5	33	65	113	82	25	161	58	21	34.5	10	27	100	2.3
BLT118-M24	5	M24x3.0	36	65	113	82	25	161	58	21	34.5	10	27	160	2.6
BLT118-M27	5.6	M27x3.0	38	87	145	98	30	204	76.5	29	45.5	14	34	200	4.2
BLT118-M30	7.8	M30x3.5	48	87	145	98	30	204	76.5	29	45.5	14	34	500	4.5

BLT118M33	8.3	M33x3.5	48	87	145	98	30	204	76.5	29	45.5	14	34	500	5.2
BLT118-M36S	9	M36x4.0	54	87	145	98	30	204	76.5	29	45.5	14	34	500	5.7
BLT118-M36B	12.5	M36x4.0	56	110	184	118	38	251	96.5	36	57	19	46	600	11
BLT118-M39	13.8	M39x4.0	56	110	184	118	38	251	96.5	36	57	19	46	600	10.5
BLT118-M42	15.6	M42x4.5	63	110	184	118	38	251	96.5	36	57	19	46	600	11.2