

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

CHAIN SLING

BLT118 Safe Rotating Lifting Ring

BLT118 Safe Rotating Lifting Ring Metric Thread: ITEM NO. WLL/T M Dimensional Parameters/mm ...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Chain Sling
Standard	EN
Weight / Size	WLL/T M Dimensional Parameters/mm Locking Torque/Nm Kg E A B C D F G H R...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.




Technical Specifications			
Category	Chain Sling	Model / SKU	BLT118-Safe-Rotating-Lifting-Ring
Standard	EN	Weight / Size	WLL/T M Dimensional Parameters/mm Locking Torque/Nm Kg E A B C D F G H R S SW BLT118-M6 0.2 M6x1.0 12 33 55 40 11.5 80 30 9.5 17.5 6 13 10 0.3 BLT118-M8 0.5 M8x1.25 12 33 55 40 11.5 80 30 9.5 17.5 6 13 10 0.3 BLT118-M10 0.7 M10x1.5 15 33 55 40 11.5 80 30 9.5 17.5 6 13 10 0.3 BLT118-M12 1 M12x1.75 20 33 55 40 11.5 80 30 9.5 17.5 6 13 15 0.3 BLT118-M14 1.5 M14x2.0 21 50 86 56 16.5 115.5 44.5 15 27 8 19 30 0.7 BLT118-M16 2 M16x2.0 24 50 86 56 16.5 115.5 44.5 15 27 8 19 50 1 BLT118-M18 2.5 M18x2.5 26 65 113 82 25 161 58 21 34.5 10 27 70 1.8 BLT118-M20 3 M20x2.5 30 65 113 82 25 161 58 21 34.5 10 27 100 2 BLT118-M22 4 M22x2.5 33 65 113 82 25 161 58 21 34.5 10 27 100 2.3 BLT118-M24 5 M24x3.0 36 65 113 82 25 161 58 21 34.5 10 27 160 2.6 BLT118-M27 5.6 M27x3.0 38 87 145 98 30 204 76.5 29 45.5 14 34 200 4.2 BLT118- M30 7.8 M30x3.5 48 87 145 98 30 204 76.5 29 45.5 14 34 500 4.5 BLT118M33 8.3 M33x3.5 48 87 145 98 30 204 76.5 29 45.5 14 34 500 5.2 BLT118-M36S 9 M36x4.0 54 87 145 98 30 204 76.5 29 45.5 14 34 500 5.7 BLT118-M36B 12.5 M36x4.0 56 110 184 118 38 251 96.5 36 57 19 46 600 11 BLT118- M39 13.8 M39x4.0 56 110 184 118 38 251 96.5 36 57 19 46 600 10.5 BLT118-M42 15.6 M42x4.5 63 110 184 118 38 251 96.5 36 57 19 46 600 11.2
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		



China BLT118 Safe Rotating Lifting Ring:

BLT118 Safe Rotating Lifting Ring

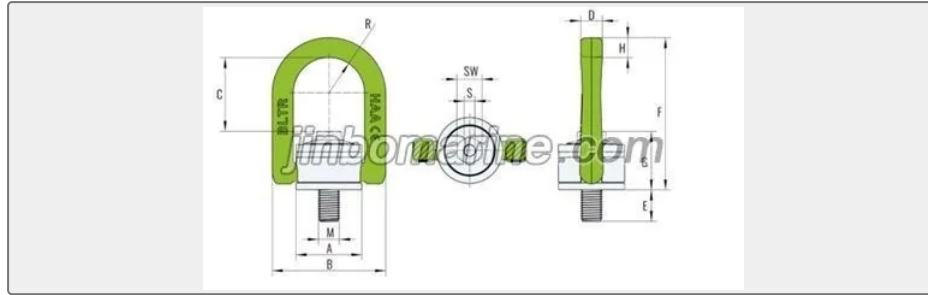

Metric Thread:

ITEM NO.	WLL/T	M	Dimensional Parameters/mm											Loc king Tor que /Nm	Kg
			E	A	B	C	D	F	G	H	R	S	S W		
BLT118-M6	0.2	M6x1.0	1 2	3 3	5 5	4 0	11 .5	80	30	9. 5	17 .5	6	13	10	0.3
BLT118-M8	0.5	M8x1.25	1 2	3 3	5 5	4 0	11 .5	80	30	9. 5	17 .5	6	13	10	0.3
BLT118-M10	0.7	M10x1.5	1 5	3 3	5 5	4 0	11 .5	80	30	9. 5	17 .5	6	13	10	0.3
BLT118-M12	1	M12x1.75	2 0	3 3	5 5	4 0	11 .5	80	30	9. 5	17 .5	6	13	15	0.3
BLT118-M14	1.5	M14x2.0	2 1	5 0	8 6	5 6	16 .5	11 5. 5	44 .5	1 5	27	8	19	30	0.7
BLT118-M16	2	M16x2.0	2 4	5 0	8 6	5 6	16 .5	11 5. 5	44 .5	1 5	27	8	19	50	1
BLT118-M18	2.5	M18x2.5	2 6	6 5	11 3	8 2	25	16 1	58	2 1	34 .5	1 0	27	70	1.8
BLT118-M20	3	M20x2.5	3 0	6 5	11 3	8 2	25	16 1	58	2 1	34 .5	1 0	27	100	2
BLT118-M22	4	M22x2.5	3 3	6 5	11 3	8 2	25	16 1	58	2 1	34 .5	1 0	27	100	2.3
BLT118-M24	5	M24x3.0	3 6	6 5	11 3	8 2	25	16 1	58	2 1	34 .5	1 0	27	160	2.6
BLT118-M27	5.6	M27x3.0	3 8	8 7	1 4 5	9 8	30	20 4	76 .5	2 9	45 .5	1 4	34	200	4.2
BLT118-M30	7.8	M30x3.5	4 8	8 7	1 4 5	9 8	30	20 4	76 .5	2 9	45 .5	1 4	34	500	4.5

BLT118M33	8.3	M33x3.5	4 8	8 7	1 4 5	9 8	30	20 4	76 .5	2 9	45 .5	1 4	34	500	5.2
BLT118-M36S	9	M36x4.0	5 4	8 7	1 4 5	9 8	30	20 4	76 .5	2 9	45 .5	1 4	34	500	5.7
BLT118-M36B	12.5	M36x4.0	5 6	11 0	1 8 4	11 8	38	25 1	96 .5	3 6	57	1 9	46	600	11
BLT118-M39	13.8	M39x4.0	5 6	11 0	1 8 4	11 8	38	25 1	96 .5	3 6	57	1 9	46	600	10.5
BLT118-M42	15.6	M42x4.5	6 3	11 0	1 8 4	11 8	38	25 1	96 .5	3 6	57	1 9	46	600	11.2