

JIS NEEDLE VALVE

Brass Female Threaded Needle Valve

Brass Needle Valve is used to connect the copper tubing, control the flow of liquids or gas requiring close regulating. Made of brass rods and brass material except for the gland O" rings. Technical Specification: ...

- ISO9001 Supplier
- Class Certificate
- Export Supply



Key Highlights


Category	JIS Needle Valve
Standard	EN
Material	Brass
Weight / Size	5.88Mpa (60kgf/cm2) at 80°C Main Size:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications

Category	JIS Needle Valve	Model / SKU	Brass-Female-Threaded-Needle-Valve
Standard	EN	Material	Brass
Weight / Size	5.88Mpa (60kgf/cm2) at 80°C Main Size:	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS	■ China Brass Female Threaded Needle Valve:	■ Technical Specification:
	■ Main Size:	



China Brass Female Threaded Needle Valve:

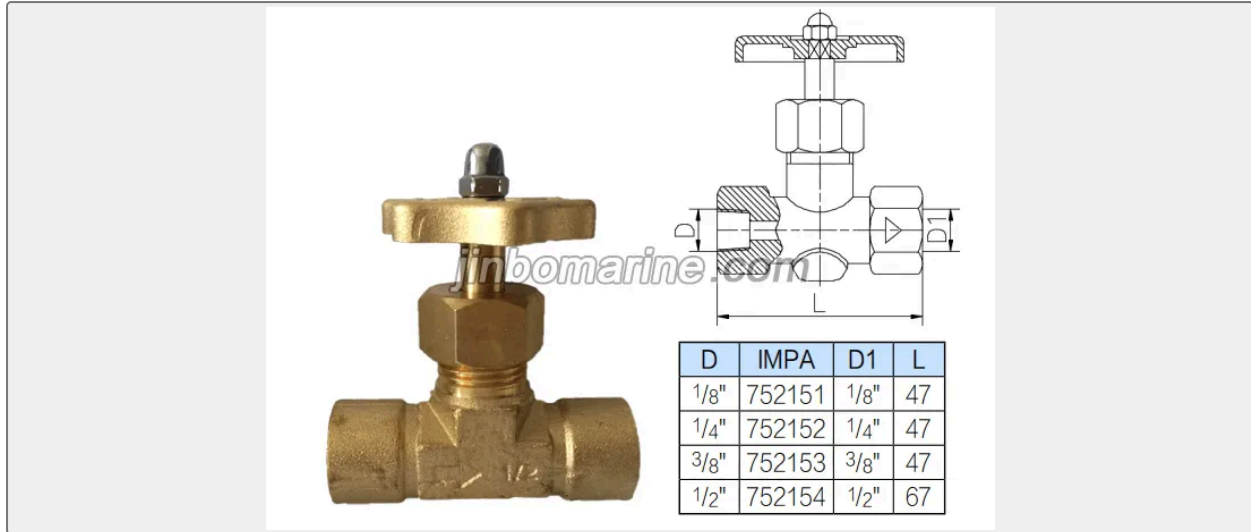

Brass Needle Valve is used to connect the copper tubing, control the flow of liquids or gas requiring close regulating. Made of brass rods and brass material except for the gland O" rings.

Technical Specification:

1. Applicable temperature will be -20°C to 100°C
2. Max Pressure: 5.88Mpa (60kgf/cm²) at 80°C

Main Size:

IMPA	Nominal Size	Thread (D/D1)	Length	Height
752151	1/8	PF-1/8	47	37
752152	1/4	PF-1/4	47	45
752153	3/8	PF-3/8	47	50
752154	1/2	PF-1/2	67	65