

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

JIS NEEDLE VALVE

Brass Needle Angle Valve with Male & Female Ends

ISO9001 Supplier

Class Certificate

Export Supply

Brass Needle Valve is used to connect the copper tubing, control the flow of liquids or gas requiring close regulating. Made of brass rods and brass material except for the gland O" rings. Technical Specification: ...



Key Highlights

Category	JIS Needle Valve
Standard	EN
Material	Brass
Weight / Size	5.88Mpa (60kgf/cm ²) at 80°C Main Size:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications


Category	JIS Needle Valve	Model / SKU	Brass-Needle-Angle-Valve-with-Male-Female-Ends
Standard	EN	Material	Brass
Weight / Size	5.88Mpa (60kgf/cm ²) at 80°C Main Size:	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS

- China Brass Needle Angle Valve with Male & Female Ends:
- Main Size:
- Technical Specification:



China Brass Needle Angle Valve with Male & Female Ends:

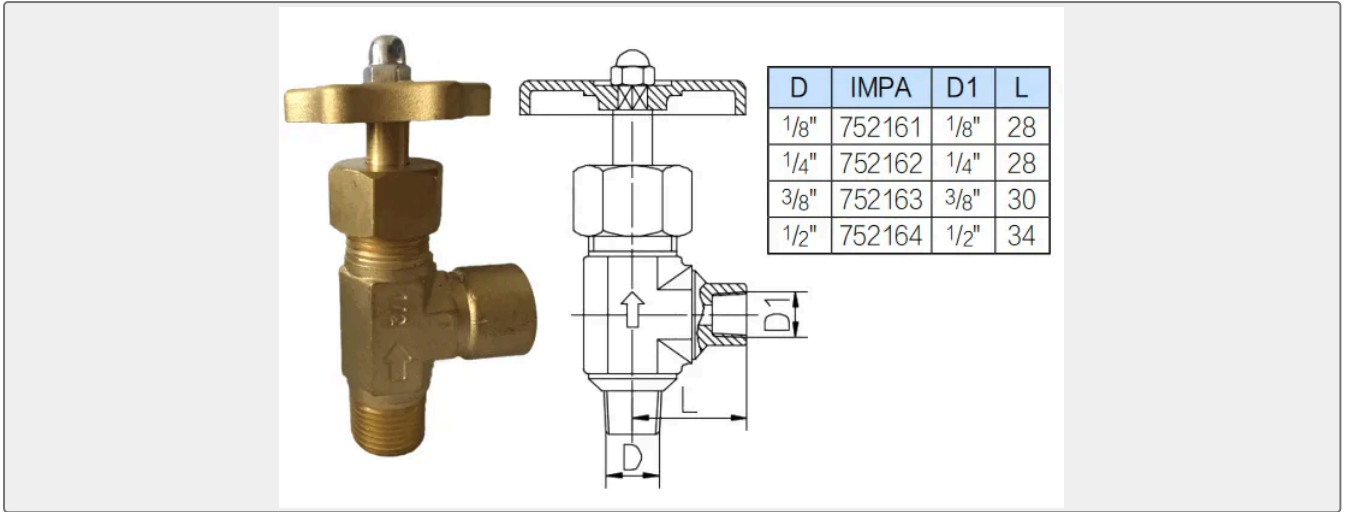

Brass Needle Valve is used to connect the copper tubing, control the flow of liquids or gas requiring close regulating. Made of brass rods and brass material except for the gland O" rings.

Technical Specification:

1. Applicable temperature will be -20°C to 100°C
2. Max Pressure: 5.88Mpa (60kgf/cm²) at 80°C

Main Size:

IMPA	Nominal Size	Thread		Length	Height
		D	D1		
752161	1/8 x 1/8	PT-1/8	PT-1/8	20	56
752162	1/4 x 1/4	PT-1/4	PT-1/4	25	64
752163	3/8 x 3/8	PT-3/8	PT-3/8	30	75
752164	1/2 x 1/2	PT-1/2	PT-1/2	38	97