

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

JIS NEEDLE VALVE

Brass Needle Valve with Ring Joint Nut and Male Thread

ISO9001 Supplier

Class Certificate

Export Supply

Brass Needle Valve is used to connect the copper tubing, control the flow of liquids or gas requiring close regulating. Made of brass rods and brass except for "O" rings. Technical Specification: 1. Applicabl...



Key Highlights

| | |
|---------------|--|
| Category | JIS Needle Valve |
| Standard | EN |
| Material | Brass |
| Weight / Size | 3.43Mpa (35kgf/cm2) 3. |
| Certificate | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS |

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications


| | | | |
|---------------|--------------------------------------|-------------|--|
| Category | JIS Needle Valve | Model / SKU | Brass-Needle-Valve-with-Ring-Joint-Nut-and-Male-Thread |
| Standard | EN | Material | Brass |
| Weight / Size | 3.43Mpa (35kgf/cm2) 3. | Certificate | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS |
| Warranty | 12 Months unless specified otherwise | Origin | China |

CONTENTS

- China Brass Needle Valve with Ring Joint Nut and Male Thread:
- Main Size(mm):
- Technical Specification:



China Brass Needle Valve with Ring Joint Nut and Male Thread:

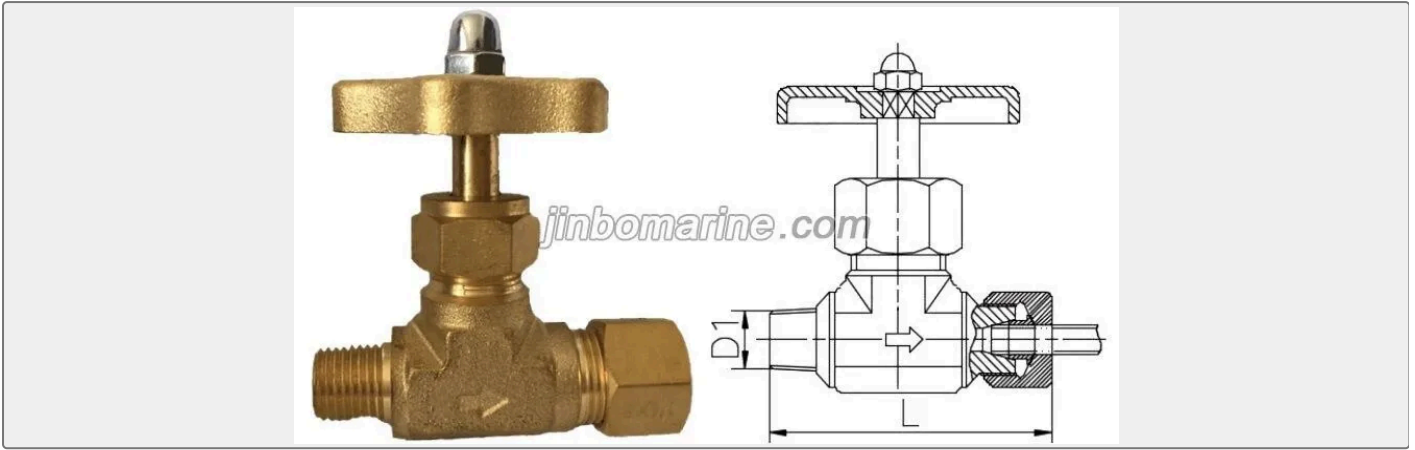

Brass Needle Valve is used to connect the copper tubing, control the flow of liquids or gas requiring close regulating. Made of brass rods and brass except for "O" rings.

Technical Specification:

1. Applicable temperature will be -20°C to 100°C
2. Max Pressure: 3.43Mpa (35kgf/cm²)
3. Recommended for use at less than 80% of max load pressure at temperature between 80°C and 100°C.

Main Size(mm):

| IMPA | Nominal Size | OD of Tube | Thread | | Length | Height |
|--------|--------------|------------|-----------------|-------------|--------|--------|
| | | | Ring Joint Side | Male Thread | | |
| 752106 | 6 x 1/8 | 6 | PF-1/4 | PT-1/8 | 52 | 37 |
| 752107 | 6 x 1/4 | 6 | PF-1/4 | PT-1/4 | 53 | 37 |
| 752108 | 8 x 1/4 | 8 | PF-3/8 | PT-1/4 | 66 | 42 |
| 752109 | 10 x 3/8 | 10 | PF-3/8 | PT-3/8 | 77 | 50 |
| 752110 | 12 x 1/2 | 12 | PF-1/2 | PT-1/2 | 80 | 50 |
| 752111 | 14 x 1/2 | 14 | PF-1/2 | PT-1/2 | 81 | 50 |