

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

CB MARINE STORM VALVE

Bronze Screw Down Vertical Storm Valve CB/T3477-92 Type B/BS

ISO9001 Supplier

Class Certificate

Export Supply

Marine Screw Down Vertical Storm Valve CB/T3477-92 is the ship side valve to discharge sewage or waste water and prevent outboard water pouring. It can be closed by the handwheel. Technical Specification: Des...



Key Highlights

Category	CB Marine Storm Valve
Standard	GB
Material	Bronze
Weight / Size	GB600 Type A- Straight Type, Flange size as per GB569 Type AS-Straight T...
Certificate	CCS, BV, ABS, GL, LR, DNV, NK, RINA, KR, IRS


We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.



Technical Specifications			
Category	CB Marine Storm Valve	Model / SKU	Bronze-Screw-Down-Vertical-Storm-Valve-CB-T3477-92-Type-B-BS
Standard	GB	Material	Bronze
Weight / Size	GB600 Type A- Straight Type, Flange size as per GB569 Type AS-Straight Type, Flange size as per GB2501 Type B- Angle Type, Flange size as per GB569 Type BS-Angle Type, Flange size as per GB2501 Type Nominal Pressure (Mpa) Nominal Size (mm) Applicable medium A,AS,B,BS 0.1 50-150 sea water, fresh water & sewage Main Parts & Material:	Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA, KR,IRS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS	<ul style="list-style-type: none"> China Bronze Screw Down Vertical Storm Valve CB/T3477-92 Type B/BS: Main Parts & Material: 	<ul style="list-style-type: none"> Technical Specification: Main Size List(mm):
-----------------	---	---

China Bronze Screw Down Vertical Storm Valve CB/T3477-92 Type B/BS:

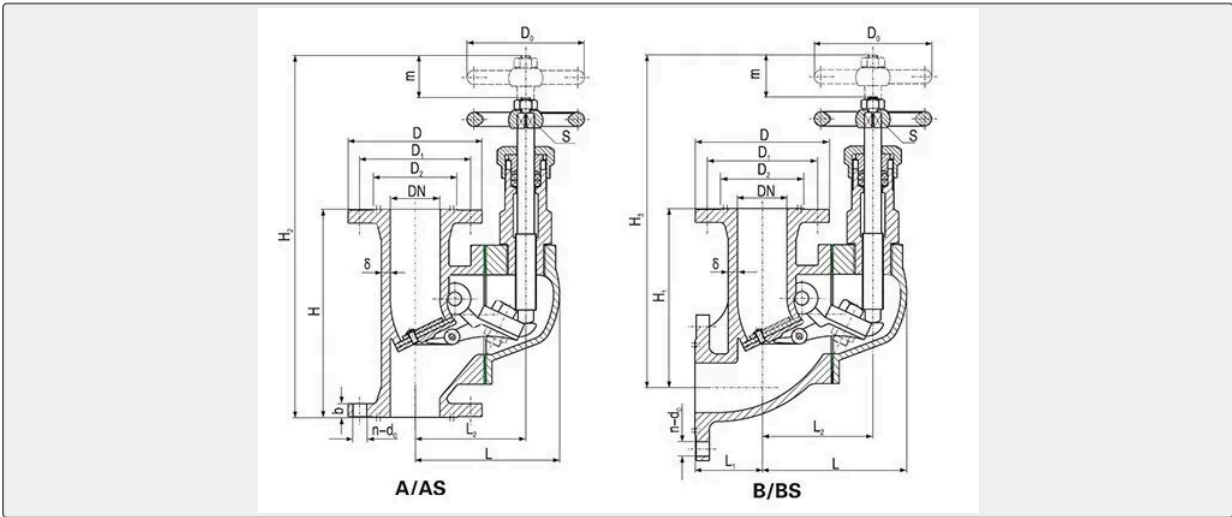

Marine Screw Down Vertical Storm Valve CB/T3477-92 is the ship side valve to discharge sewage or waste water and prevent outboard water pouring. It can be closed by the handwheel.

Technical Specification:

Design Standard:CB/T3477-92

Test Standard: GB600



Type A- Straight Type, Flange size as per GB569

Type AS-Straight Type, Flange size as per GB2501

Type B- Angle Type, Flange size as per GB569

Type BS-Angle Type, Flange size as per GB2501

Type	Nominal Pressure (Mpa)	Nominal Size (mm)	Applicable medium
A,AS,B,BS	0.1	50-150	sea water, fresh water & sewage

Main Parts & Material:

Body-Bronze

Bonnet-Bronze

Disc-Bronze


Stem-Bronze

Clamp Material-Brass

Main Size List(mm):

Type A,B:

nominal diameter	structure dimension							Thickness δ		flange connection dimension					bolt		hand wheel		Lift Range m	Weight(kg)			
	H	H1	H2	H3	L	L1	L2	cast steel	bronze	D	D1	D2	b	d	n	Th	Do	S		cast steel		bronze	
																				A	B	A	B
50	210	170	300	327	135	90	100	7.5	5	135	130	84	130	135	6	M14	80	110	40	12	13	10	11
65	240	200	350	384	154	110	120	8.0	6	155	150	114	150	155	6	M14	80	110	45	17	19	13	15
80	260	220	400	437	175	120	130	8.5	6	170	165	118	170	175	8	M14	80	110	45	22	24	19	21
100	280	240	450	493	197	130	140	9.0	6	190	185	138	190	195	8	M14	80	110	45	30	35	28	31
125	330	270	500	547	235	150	160	10.0	7	215	210	164	215	220	10	M14	80	110	65	44	50	40	46
150	360	300	550	597	267	160	170	11.0	7	240	235	194	240	245	12	M14	120	110	65	52	67	48	63



Type AS/BS:

nominal diameter	structure dimension							Thickness δ		flange connection dimension					bolt		hand wheel		Lift Range m	Weight(kg)			
	H	H1	H2	H3	L	L1	L2	cast steel	bronze	D	D1	D2	b	d0	n	Th.	Do	S		cast steel		bronze	
																				A S	B S	A S	B S
50	210	170	360	327	135	930	1000	8.0	5	140	110	90	164	144	4	M12	80	111	40	12	13	11	12
65	240	200	385	342	144	1110	1200	8.0	6	160	130	110	166	144	4	M12	80	111	45	17	19	14	16
80	260	220	400	370	155	1220	1400	9.0	6	190	150	128	188	168	4	M16	80	111	45	22	24	20	22
100	280	250	430	393	172	1330	1500	9.0	6	210	170	148	208	188	4	M16	80	111	45	30	35	29	33
125	330	270	465	427	195	1450	1600	10.0	7	240	200	178	240	208	8	M16	80	111	65	44	50	42	48
150	360	300	490	447	213	1570	1700	10.0	7	265	225	202	260	218	8	M16	120	111	65	52	67	50	64