

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

RECIPROCATING PUMP


CDZ-250 Marine Electrical Plunger Pump

ISO9001 Supplier

Class Certificate

Export Supply

Purpose: The working medium of this electric reciprocating pump can be sea water, fresh water, oily sewage, etc. It can be used to pump oily sewage, bilge water, sea water, fresh water and other liquids that do not...

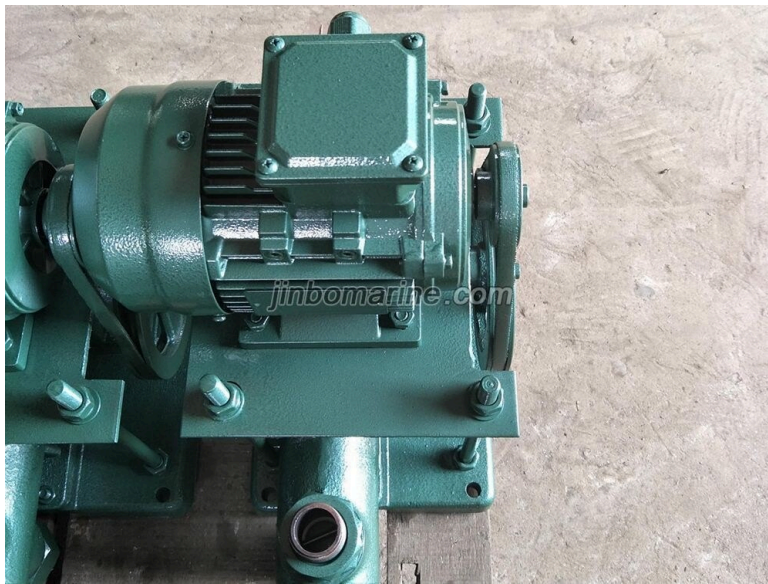

Key Highlights

Category	Reciprocating Pump
Standard	EN
Weight / Size	Unit CDZ-50 CDZ-100 CDZ-250 CDZ-500 CDZ-1000 CDZ-2000 CDZ-3000 CDZ-4000 ...
Certificate	CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.



Features:

1. This pump does not produce mechanical floatation
2. This pump is small in volume, compact in structure and small in floor area;
3. It is convenient for installation and operation, maintenance and repair.

Data Sheet:

No.	Unit	CDZ-50	CDZ-100	CDZ-250	CDZ-500	CDZ-1000	CDZ-2000	CDZ-3000	CDZ-4000	CDZ-5000	CDZ-10000	
Head	Mpa	0.20	0.20	0.29	0.29	0.29	0.29	0.29	0.29	0.29	0.29	
Capacity	M3/h	0.05	0.1	0.25	0.5	1	2	3	4	5	10	
Suction head	m	6	6	6	6	6	6	6	6	6	6	
Reciprocating times	min1	66	66	60	50	50	68	43	55	68	68	
stroke	mm	17	30	40	64	64	80	90	90	90	120	
Pump cylinder diameter	mm	38	38	50	60	85	90	100	100	100	118	
Suction and discharge diameter	mm	15	15	23	23	40	40	60	60	60	80	
Motor	Power	kw	0.18	0.25	0.25	0.37	0.55	0.75	1.1	1.5	2.2	3
	Voltage /power	V/HZ r/min	AC380/ 50 1400	AC380/ 50 1400	AC380/ 50 1400	AC380/ 50 1400	AC380/ 50 1400	AC380/ 50 1400	AC380/ 50 1400	AC380/ 50 1400	AC380/ 50 1400	AC380/ 50 1400
	Model		YS-H 6324	YS-H 7114	YS-H 7114	YS-H 7124	YS-H 8014	YS-H 8024	YS-H 90S4	YS-H 90L4	YS-H IOOLi-4	YS-H 100L-4
Pump Wight	kg	15	15	25	30	40	50	140	140	140	230	
Size	L	mm	305	305	345	420	450	470	860	860	860	1030
	W	mm	240	240	250	265	285	305	420	420	420	375
	H	mm	300	300	368	395	400	510	585	585	585	700