IEC 60092 STANDARD CABLE (CHINA TYPE)


# CHEPF/SC Flame Retardant Marine Telecommunication Cable250V(No Armoured)

ISO9001 Supplier

Class Certificate

Export Supply

CHEPF/SC Cable is Flame Retardant Marine Telecommunication & Instrument Cable 150/250V Cable Construction   Conductor: Stranded Tinned Anneal Copper. IEC 60228 Class 2 ...

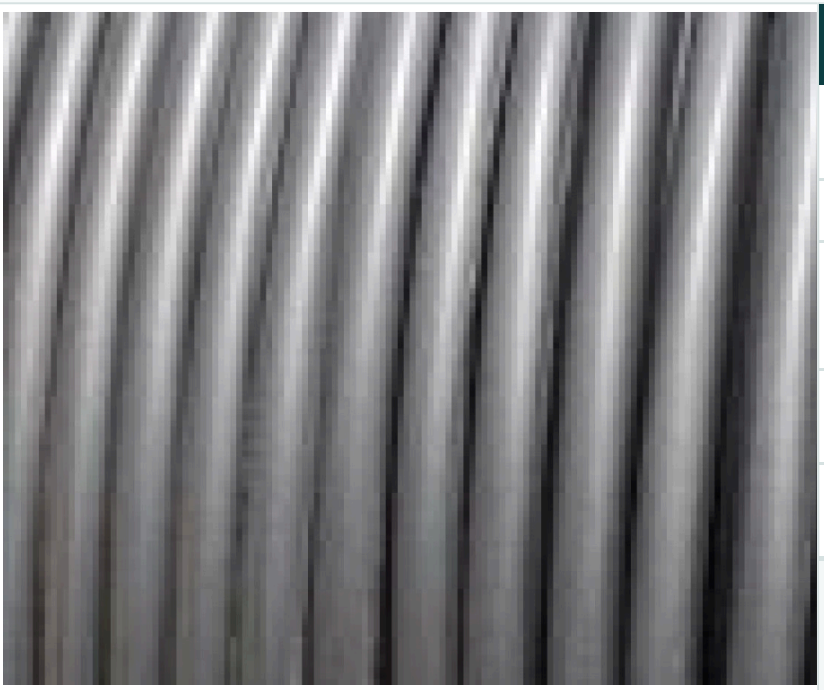

## Key Highlights

| | |
|---|---|
| **Category** | IEC 60092 Standard Cable (China Type) |
| **Standard** | EN |
| **Material** | Stranded Tinned Annealed Copper/EPRinsulation/SHF1 Outer Sheath |
| **Weight / Size** | IEC 61034-1, IEC61034-2 Cores & Size Cores: |
| **Certificate** | ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS |

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

## Technical Specifications

| | | | |
|---|---|---|---|
| **Category** | IEC 60092 Standard Cable (China Type) | **Model / SKU** | CHEPF-SC-Flame-Retardant-Marine-Telecommunication-Cable250V-No-Armoured |
| **Standard** | EN | **Material** | Stranded Tinned Annealed Copper/EPRinsulation/SHF1 Outer Sheath |
| **Weight / Size** | IEC 61034-1, IEC61034-2 Cores & Size Cores: | **Certificate** | ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS |
| **Warranty** | 12 Months unless specified otherwise | **Origin** | China |

CONTENTS


- China CHEPF/SC Flame Retardant Marine Telecommunication Cable250V(No Armoured):
- Standards
- Feature
- Cable Construction
- Cores & Size
- Application:


## China CHEPF/SC Flame Retardant Marine Telecommunication Cable250V(No Armoured):




CHEPF/SC Cable is Flame Retardant Marine Telecommunication & Instrument Cable 150/250V

## Cable Construction

Conductor: Stranded Tinned Anneal Copper. IEC 60228 Class 2

Insulation : EPR Insulation

Inner Covering: None

Armour : None

Outer Sheath : Halogen-free Thermoplastic Polyolefin(SHF1)

## Standards

Design : IEC 60092-350, 376

Insulation Material : IEC 60092 -351

Sheath Material : IEC 60092-359

Flammability: IEC 60332-1 & IEC 60332-3 Category A

Halogen--free: IEC60754-1, IEC60754-2

Smoke Emission: IEC 61034-1, IEC61034-2

## Cores & Size

Cores: 1P, 2P,3P,4P,5P,7P,10P,12P,14P,16P,19P,24P,27P, 30P, 33P,37P,

1T, 2T,3T,4T,5T,7T,10T,12T,14P,16T,19T,24T,27T, 30T, 33T,37T

Size (sqmm): 0.75, 1, 1.5, 2.5.

## Feature

Halogen-free, Low Smoke, Flame retardant

## Application:

The cable is fixed installation, used for telecommunication, computer and information processing unit of shipboard and naval ship.