

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

CENTRIFUGAL PUMP

CISG Single Stage Single Suction Marine Pipeline Centrifugal Pump

- ISO9001 Supplier
- Class Certificate
- Export Supply


Description: Installation: Type Q (m3/h) Head (m) Speed (r/min) Power (kw) ...



Key Highlights

Category	Centrifugal Pump
Standard	EN
Weight / Size	Type Q (m3/h) Head (m) Speed (r/min) Power (kw) Weight (kg) CISG15-80 1....
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.



Technical Specifications			
Category	Centrifugal Pump	Model / SKU	CISG-single-stage-single-suction-marine-pipeline-centrifugal-pump
Standard	EN	Weight / Size	Type Q (m3/h) Head (m) Speed (r/min) Power (kw) Weight (kg) CISG15-80 1.1 8.5 2800 0.18 17 CISG20-110 1.8 16 2800 0.37 25 CISG20-160 1.8 33 2900 0.75 29 CISG25-110 2.8 16 2900 0.55 26 CISG25-125 2.8 20.6 2900 0.75 28 CISG25-125A 2.5 17 2900 0.55 27 CISG25-160 2.8 33 2900 1.5 39 CISG25-160A 2.6 29 2900 1.1 34 32-100(1) 4.4 28 2900 0.75 32 32-125 3.5 13.2 2900 0.75 28 32-125A 3.1 22 2900 0.55 28 32-160 4.4 17.6 2900 1.5 39 32-160A 2.8 33.2 2900 1.1 38 32-160(1) 4.4 29 2900 2.2 47 32-200(1) 3.9 33.2 2900 4 43 32-200(1)A 4.4 50.5 2900 2.2 37 40-100 3.9 44.6 2900 0.55 32 40-100A 3.9 13.2 2900 0.37 32 40-125 4.4 10.6 2900 1.1 34 40-125A 3.9 21 2900 0.75 33 40-160 4.4 17.6 2900 2.2 47 40-160A 4.1 32 2900 1.5 43 40-160B 3.8 29 2900 1.1 38 40-200 4.4 25.5 2900 5.5 74 40-200A 4.1 51 2900 4 62 40-200B 3.7 45 2900 3 52 40-250 4.4 38 2900 7.5 105 40-250A 4.1 82 2900 5.5 98 40-250B 3.8 72 2900 4 77 Other model:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

CONTENTS	<ul style="list-style-type: none"> ■ Description: ■ Installation: ■ Other model:
-----------------	---


Description:

CISG 100-160 (I) A (B)

- 叶轮经第二次切割 Impeller is cut for the 2 time™
- 叶轮经第一次切割 Impeller is cut for the 1 time™
- 流量分类 Classification of flow
- 叶轮名义外径 Nominal outer diameter of impeller (mm)
- 泵进、出口公称直径 Nominal diameters of pump inlet and outlet(mm)
- 单级单吸船用管道离心泵 CISG single stage single suction marine pump

0.076953s

Installation:

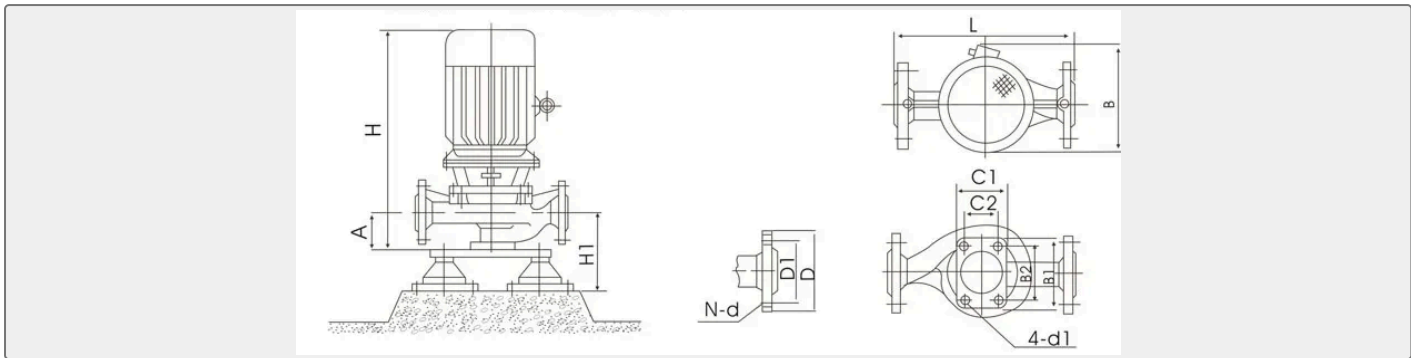

Type	Q (m ³ /h)	Head (m)	Speed (r/min)	Power (kw)	Weight (kg)
CISG15-80	1.1	8.5	2800	0.18	17
CISG20-110	1.8	16	2800	0.37	25
CISG20-160	1.8	33	2900	0.75	29
CISG25-110	2.8	16	2900	0.55	26
CISG25-125	2.8	20.6	2900	0.75	28
CISG25-125A	2.5	17	2900	0.55	27
CISG25-160	2.8	33	2900	1.5	39
CISG25-160A	2.6	29	2900	1.1	34
32-100(1)	4.4	28	2900	0.75	32
32-125	3.5	13.2	2900	0.75	28
32-125A	3.1	22	2900	0.55	28
32-160	4.4	17.6	2900	1.5	39
32-160A	2.8	33.2	2900	1.1	38
32-160(1)	4.4	29	2900	2.2	47
32-200(1)	3.9	33.2	2900	4	43
32-200(1)A	4.4	50.5	2900	2.2	37
40-100	3.9	44.6	2900	0.55	32
40-100A	3.9	13.2	2900	0.37	32
40-125	4.4	10.6	2900	1.1	34
40-125A	3.9	21	2900	0.75	33
40-160	4.4	17.6	2900	2.2	47
40-160A	4.1	32	2900	1.5	43
40-160B	3.8	29	2900	1.1	38
40-200	4.4	25.5	2900	5.5	4

40-200A	4.1	51	2900	4	62
40-200B	3.7	45	2900	3	52
40-250	4.4	38	2900	7.5	105
40-250A	4.1	82	2900	5.5	98
40-250B	3.8	72	2900	4	77


Other model:

CISG泵主要性能参数与安装尺寸表(二)
Main performance parameter and installation size table of CISG(two)

型号 Type	流量Q m³/h(l/s)	扬程H m	功率P kW(HP)	转速n r/min	外形尺寸 Shape dimension			安装尺寸 Installation dimension			进出口法兰尺寸 Inlet and outlet flange size		重量G kg				
					L	B	H	C	x	B	A	C ₁		x	B	D	D ₁
40-100(I)	1.1	2.3	34	2900	300	230	455	120	170	90	80	100	4-ø14	ø110	4-ø18	SD41-0.5	110
40-100(IIA)	0.75	2.3	32	2900	300	230	455	120	170	90	80	100	4-ø14	ø110	4-ø18	SD41-0.5	110
40-125(I)	1.5	2.3	38	2900	300	240	465	120	170	90	80	100	4-ø14	ø110	4-ø18	SD41-0.5	110
40-125(IIA)	1.1	2.3	33	2900	300	240	465	120	170	90	80	100	4-ø14	ø110	4-ø18	SD41-0.5	110
40-160(I)	3	2.3	56	2900	340	300	550	120	170	95	80	100	4-ø14	ø110	4-ø18	SD61-0.5	115
40-160(IIA)	2.2	2.3	47	2900	340	300	515	120	170	95	80	100	4-ø14	ø110	4-ø18	SD61-0.5	115
40-160(III)	1.5	2.3	43	2900	340	300	490	120	170	95	80	100	4-ø14	ø110	4-ø18	SD61-0.5	115
40-200(I)	5.5	2.3	85	2900	360	350	630	120	170	95	80	100	4-ø14	ø110	4-ø18	SD81-0.5	115
40-200(IIA)	4	2.3	75	2900	360	350	570	120	170	95	80	100	4-ø14	ø110	4-ø18	SD81-0.5	115
40-200(IIIB)	3	2.3	63	2900	360	350	550	120	170	95	80	100	4-ø14	ø110	4-ø18	SD81-0.5	115
40-250(I)	11	2.3	145	2900	440	360	650	140	200	105	100	100	4-ø18	ø110	4-ø18	JD50-3	205
40-250(IIA)	7.5	2.3	95	2900	440	360	650	140	200	105	100	100	4-ø18	ø110	4-ø18	JD50-3	205
40-250(IIIB)	7.5	2.3	94	2900	440	360	650	140	200	105	100	100	4-ø18	ø110	4-ø18	JD50-3	205
40-250(III)	5.5	2.3	84	2900	440	360	650	140	200	105	100	100	4-ø18	ø110	4-ø18	JD50-3	205
50-100	1.1	2.3	36	2900	290	230	455	100	150	85	70	100	4-ø14	ø105	4-ø18	SD41-0.5	115
50-100A	0.75	2.3	35	2900	290	230	455	100	150	85	70	100	4-ø14	ø105	4-ø18	SD41-0.5	115
50-125	1.5	2.3	43	2900	300	240	465	100	150	85	70	100	4-ø14	ø105	4-ø18	SD41-0.5	115
50-125A	1.1	2.3	38	2900	300	240	465	100	150	85	70	100	4-ø14	ø105	4-ø18	SD41-0.5	115
50-160	3	2.3	59	2900	320	300	550	120	170	100	80	100	4-ø14	ø105	4-ø18	SD61-0.5	120
50-160A	2.2	2.3	51	2900	320	300	515	120	170	100	80	100	4-ø14	ø105	4-ø18	SD61-0.5	120
50-160B	1.5	2.3	47	2900	320	300	490	120	170	100	80	100	4-ø14	ø105	4-ø18	SD61-0.5	120
50-200	5.5	2.3	101	2900	360	350	630	120	170	100	80	100	4-ø14	ø105	4-ø18	SD81-0.5	120
50-200A	4	2.3	88	2900	360	350	570	120	170	100	80	100	4-ø14	ø105	4-ø18	SD81-0.5	120
50-200B	3	2.3	78	2900	360	350	550	120	170	100	80	100	4-ø14	ø105	4-ø18	SD81-0.5	120
50-250	11	2.3	160	2900	440	370	650	140	200	105	100	100	4-ø18	ø105	4-ø18	JD50-3	205
50-250A	7.5	2.3	115	2900	440	360	650	140	200	105	100	100	4-ø18	ø105	4-ø18	JD50-3	205
50-250B	7.5	2.3	114	2900	440	360	650	140	200	105	100	100	4-ø18	ø105	4-ø18	JD50-3	205
50-250C	5.5	2.3	106	2900	440	360	650	140	200	105	100	100	4-ø18	ø105	4-ø18	JD50-3	205

CISG泵主要性能参数与安装尺寸表(三)
Main performance parameter and installation size table of CISG(three)

型号 Type	流量Q m³/h(l/s)	扬程H m	功率P kW(HP)	转速n r/min	外形尺寸 Shape dimension			安装尺寸 Installation dimension			进出口法兰尺寸 Inlet and outlet flange size		重量G kg				
					L	B	H	C	x	B	A	C ₁		x	B	D	D ₁
50-100(I)	1.5	2.5	41	2900	320	235	475	100	150	100	100	4-ø16	ø125	4-ø18	SD41-0.5	125	
50-100(IIA)	1.1	2.5	36	2900	320	235	460	100	150	100	100	4-ø16	ø125	4-ø18	SD41-0.5	125	
50-125(I)	3	2.5	58	2900	340	260	550	100	150	100	100	4-ø16	ø125	4-ø18	SD61-0.5	110	
50-125(IIA)	2.2	2.5	48	2900	340	260	515	100	150	100	100	4-ø16	ø125	4-ø18	SD61-0.5	110	
50-160(I)	4	2.5	72	2900	360	305	570	100	150	100	100	4-ø16	ø125	4-ø18	SD81-0.5	120	
50-160(IIA)	3	2.5	71	2900	360	305	570	100	150	100	100	4-ø16	ø125	4-ø18	SD81-0.5	120	
50-160(IIIB)	3	2.5	69	2900	360	305	550	100	150	100	100	4-ø16	ø125	4-ø18	SD81-0.5	120	
50-200(I)	7.5	2.5	108	2900	380	350	630	100	150	100	100	4-ø16	ø125	4-ø18	SD81-0.5	125	
50-200(IIA)	7.5	2.5	107	2900	380	350	630	100	150	100	100	4-ø16	ø125	4-ø18	SD81-0.5	125	
50-200(IIIB)	5.5	2.5	100	2900	380	350	630	100	150	100	100	4-ø16	ø125	4-ø18	SD81-0.5	125	
50-250(I)	15	2.5	175	2900	480	435	785	100	200	110	120	100	4-ø18	ø125	4-ø18	JD50-3	210
50-250(IIA)	11	2.5	165	2900	480	435	785	100	200	110	120	100	4-ø18	ø125	4-ø18	JD50-3	210
50-250(IIIB)	11	2.5	165	2900	480	435	785	100	200	110	120	100	4-ø18	ø125	4-ø18	JD50-3	210
50-315(I)	30	2.5	310	2900	550	510	920	100	200	110	120	100	4-ø18	ø125	4-ø18	JD50-3	210
50-315(IIA)	22	2.5	245	2900	550	510	850	100	200	110	120	100	4-ø18	ø125	4-ø18	JD50-3	210
50-315(IIIB)	18.5	2.5	215	2900	550	510	830	100	200	110	120	100	4-ø18	ø125	4-ø18	JD50-3	210
50-315(III)	15	2.5	195	2900	550	510	830	100	200	110	120	100	4-ø18	ø125	4-ø18	JD50-3	210
65-100	1.5	2.5	48	2900	340	235	475	100	150	100	100	4-ø16	ø145	4-ø18	SD41-0.5	125	
65-100A	1.1	2.5	41	2900	340	235	460	100	150	100	100	4-ø16	ø145	4-ø18	SD41-0.5	125	
65-125	3	2.5	58	2900	340	260	515	100	150	100	100	4-ø16	ø145	4-ø18	SD61-0.5	120	
65-125A	2.2	2.5	49	2900	340	260	515	100	150	100	100	4-ø16	ø145	4-ø18	SD61-0.5	120	
65-160	4	2.5	71	2900	360	305	570	100	150	100	100	4-ø16	ø145	4-ø18	SD81-0.5	120	
65-160A	3	2.5	70	2900	360	305	570	100	150	100	100	4-ø16	ø145	4-ø18	SD81-0.5	120	
65-160B	3	2.5	69	2900	360	305	550	100	150	100	100	4-ø16	ø145	4-ø18	SD81-0.5	120	
65-200	7.5	2.5	107	2900	380	350	630	100	150	100	100	4-ø16	ø145	4-ø18	SD81-0.5	125	
65-200A	7.5	2.5	107	2900	380	350	630	100	150	100	100	4-ø16	ø145	4-ø18	SD81-0.5	125	
65-200B	5.5	2.5	100	2900	380	350	630	100	150	100	100	4-ø16	ø145	4-ø18	SD81-0.5	125	
65-250	15	2.5	180	2900	480	435	785	100	200	110	120	100	4-ø18	ø145	4-ø18	JD50-3	210



CISG泵主要性能参数与安装尺寸表(旧)
Main performance parameter and Installation size table of CISG(fove)

型号 Type	流量 Q Flow	口径 D Dia	转速 n RPM	功率 P Power	电机功率 Motor Power	泵体尺寸 Shape dimension				进出口法兰尺寸 Inlet and outlet flange size			总高 H Total height		
						L	B	H	C、x、B	A	C ₁ x B ₁	4-d		D	D ₁
65-250A	11	250	1750	480	435	765	160x220	110	120x160	4-118	0160	0160	4-118	J020-3	210
65-250B	11	250	1750	480	435	765	160x220	110	120x160	4-118	0160	0160	4-118	J020-3	210
65-315	22	315	1750	550	510	805	160x220	120	120x160	4-118	0160	0160	4-118	J020-3	210
65-315A	22	315	1750	550	510	805	160x220	120	120x160	4-118	0160	0160	4-118	J020-3	210
65-315B	22	315	1750	550	510	805	160x220	120	120x160	4-118	0160	0160	4-118	J020-3	210
65-315C	15	250	1750	450	435	765	160x220	120	120x160	4-118	0160	0160	4-118	J020-3	210
65-1000I	3	1000	1450	285	270	510	140x200	120	100x160	4-118	0160	0160	4-118	S061-0.5	140
65-1000IA	2.2	1000	1450	245	235	470	140x200	120	100x160	4-118	0160	0160	4-118	S061-0.5	140
65-1250I	5.5	1250	1450	360	360	600	140x200	120	100x160	4-118	0160	0160	4-118	S061-0.5	140
65-1250IA	4	1250	1450	315	315	550	140x200	120	100x160	4-118	0160	0160	4-118	S061-0.5	140
65-1600I	7.5	1600	1450	420	420	660	140x200	120	100x160	4-118	0160	0160	4-118	S061-0.5	145
65-1600IA	7.5	1600	1450	420	420	660	140x200	120	100x160	4-118	0160	0160	4-118	S061-0.5	145
65-1600IB	5.5	1600	1450	315	315	550	140x200	120	100x160	4-118	0160	0160	4-118	S061-0.5	145
65-2000I	15	2000	1750	480	435	765	160x220	120	100x160	4-118	0160	0160	4-118	J020-3	225
65-2000IA	11	2000	1750	435	435	765	160x220	120	100x160	4-118	0160	0160	4-118	J020-3	225
65-2000IB	7.5	2000	1750	435	435	765	160x220	120	100x160	4-118	0160	0160	4-118	J020-3	225
65-2500I	22	2500	1750	550	510	805	160x220	120	100x160	4-118	0160	0160	4-118	J020-3	230
65-2500IA	18.5	2500	1750	480	435	765	160x220	120	100x160	4-118	0160	0160	4-118	J020-3	230
65-2500IB	15	2500	1750	480	435	765	160x220	120	100x160	4-118	0160	0160	4-118	J020-3	230
65-3150I	37	3150	1750	550	510	805	160x220	120	100x160	4-118	0160	0160	4-118	J020-3	230
65-3150IA	30	3150	1750	550	510	805	160x220	120	100x160	4-118	0160	0160	4-118	J020-3	230
65-3150IB	30	3150	1750	550	510	805	160x220	120	100x160	4-118	0160	0160	4-118	J020-3	230
65-3150IC	22	3150	1750	470	470	885	160x220	120	100x160	4-118	0160	0160	4-118	J020-3	230
80-100	3	1000	1450	285	270	510	140x200	120	100x160	4-118	0200	0160	4-118	S061-0.5	140
80-100A	2.2	1000	1450	245	235	470	140x200	120	100x160	4-118	0200	0160	4-118	S061-0.5	140
80-125	5.5	1250	1450	360	360	600	140x200	120	100x160	4-118	0200	0160	4-118	S061-0.5	140
80-125A	4	1250	1450	315	315	550	140x200	120	100x160	4-118	0200	0160	4-118	S061-0.5	140
80-160	7.5	1600	1450	420	420	660	140x200	120	100x160	4-118	0200	0160	4-118	S061-0.5	145

