

IEC 60092 STANDARD CABLE (CHINA TYPE)


CJPF/NC Fire Resistant Marine Power & Lighting Cable 0/6/1KV(No Armoured)

ISO9001 Supplier

Class Certificate

Export Supply

CJPF/NC Type Cable is Fire-Resistant Marine Power & Control Cable (No armoured) Cable Construction Conductor: Tinned Copper. IEC 60228 Class 2 Mica Tape In...

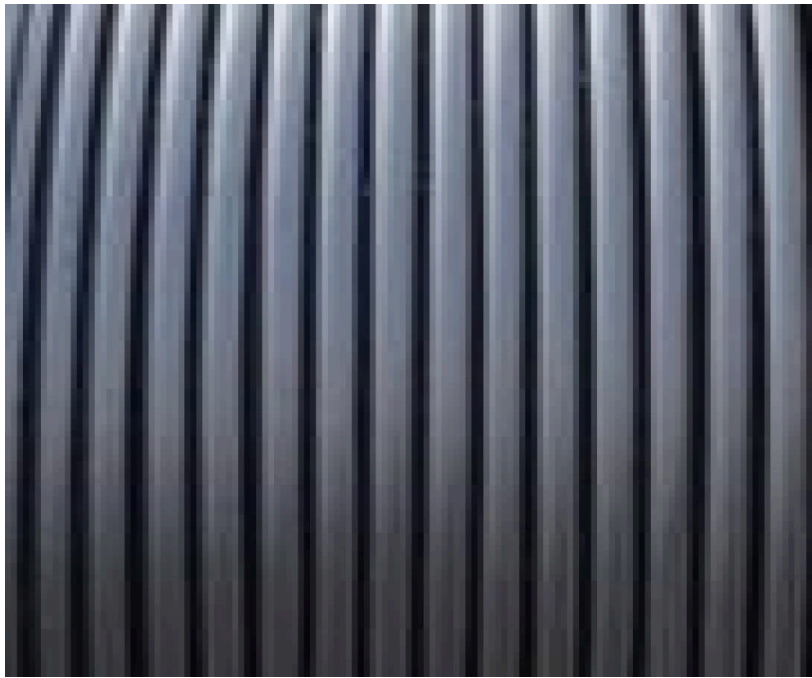

Key Highlights

| | |
|----------------------|---|
| Category | IEC 60092 Standard Cable (China Type) |
| Standard | DIN |
| Material | Tinned Copper/Mica Tape/XLPE insulation/SHF1 Outer Sheath |
| Weight / Size | IEC 61034-1, IEC61034-2 Cores & Size Cores: |
| Certificate | ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS |

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

| | | | |
|----------------------|---|--------------------|--|
| Category | IEC 60092 Standard Cable (China Type) | Model / SKU | CJPF-NC-Fire-Resistant-Marine-Power-Lighting-Cable-0-6-1KV-No-Armoured |
| Standard | DIN | Material | Tinned Copper/Mica Tape/XLPE insulation/SHF1 Outer Sheath |
| Weight / Size | IEC 61034-1, IEC61034-2 Cores & Size Cores: | Certificate | ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS |
| Warranty | 12 Months unless specified otherwise | Origin | China |



CONTENTS

- China CJPF/NC Fire Resistant Marine Power & Lighting Cable 0/6/1KV(No Armoured):
- Standards
- Features
- Cable Construction
- Cores & Size
- Delivery

China CJPF/NC Fire Resistant Marine Power & Lighting Cable 0/6/1KV(No Armoured):



CJPF/NC Type Cable is Fire-Resistant Marine Power & Control Cable (No armoured)

Cable Construction

Conductor: Tinned Copper. IEC 60228 Class 2

Mica Tape

Insulation : XLPE Insulation

Inner Covering: None

Armour : None

Outer Sheath : Halogen-free Cross Linked Thermoset Polyolefin(SHF2)

Standards

Design : IEC 60092-350, 353

Insulation Material : IEC 60092 -351

Sheath Material : IEC 60092-359

Flammability: IEC 60331

Halogen--free: IEC60754-1, IEC60754-2

Smoke Emission: IEC 61034-1, IEC61034-2

Cores & Size

Cores: 1, 2,3,4,5,7,10,12,14,16,19,24,37

Size (sqmm): 1.5, 2.5, 4, 6, 10, 16, 25, 35, 50, 70, 95, 120, 150, 180, 240, 300



Features

Halogen-free, Low Smoke, Flame retardant

Delivery

We can delivery around the world according to Incoterms 2010.

