

# Jinbo Marine

Marine &amp; Offshore Equipment Datasheet

PRODUCT DATASHEET

IEC 60092 STANDARD CABLE (CHINA TYPE)

## CJPF96/NC Fire Resistant Marine Power & Lighting Cable 0/6/1KV(Armoured)


ISO9001 Supplier


Class Certificate

Export Supply

CJPF96/NC cable is Galvanized Steel Wire Braided and Fire Resistant Marine Power & Control Cable. Cable Construction Conductor: Tinned Copper. IEC 60228 Class 2 Mica Tape

...

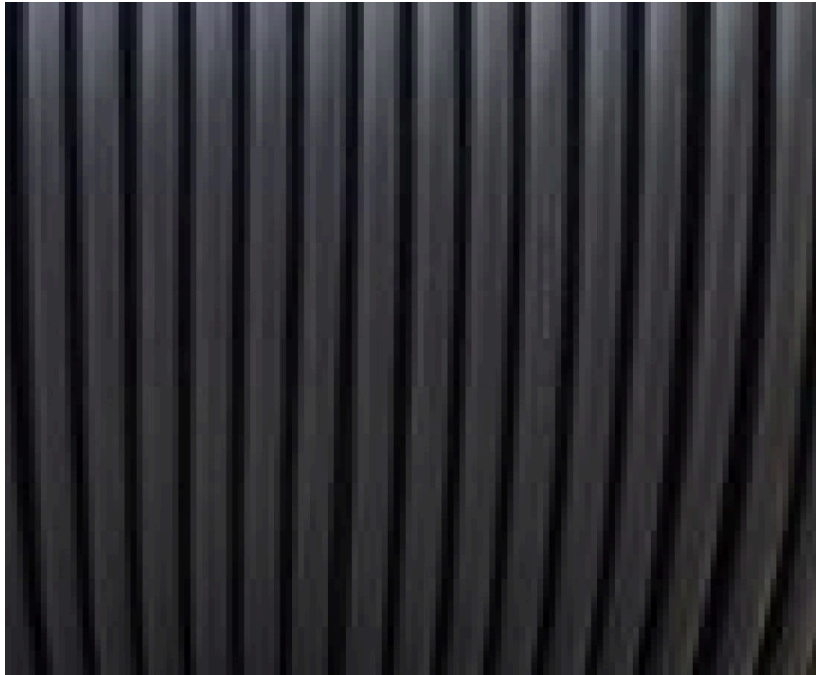	Key Highlights	
	<b>Category</b>	IEC 60092 Standard Cable (China Type)
	<b>Standard</b>	EN
	<b>Material</b>	Tinned Copper/Mica Tape/XLPE insulation/SHF1 sheath/Galvanized Steel Wir...
	<b>Weight / Size</b>	IEC 61034-1, IEC61034-2 Cores & Size Cores:
<b>Certificate</b>	ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS	
<p>We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.</p>		

Technical Specifications			
<b>Category</b>	IEC 60092 Standard Cable (China Type)	<b>Model / SKU</b>	CJPF96-NC-Fire-Resistant-Marine-Power-Lighting-Cable-0-6-1KV-Armoured
<b>Standard</b>	EN	<b>Material</b>	Tinned Copper/Mica Tape/XLPE insulation/SHF1 sheath/Galvanized Steel Wire Braided/SHF1 Sheath
<b>Weight / Size</b>	IEC 61034-1, IEC61034-2 Cores & Size Cores:	<b>Surface</b>	Galvanized
<b>Certificate</b>	ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS	<b>Warranty</b>	12 Months unless specified otherwise
<b>Origin</b>	China	 0.036747s	

**CONTENTS**

- China CJPF96/NC Fire Resistant Marine Power & Lighting Cable 0/6/1KV(Armoured):
- Standards
- Features
- Cable Construction
- Cores & Size

## China CJPF96/NC Fire Resistant Marine Power & Lighting Cable 0/6/1KV(Armoured):



CJPF96/NC cable is Galvanized Steel Wire Braided and Fire Resistant Marine Power & Control Cable.

### Cable Construction

Conductor: Tinned Copper. IEC 60228 Class 2

Mica Tape

Insulation : XLPE Insulation

Inner Covering: Halogen-free Thermoplastic Polyolefin(SHF1)

Armour : Galvanized Steel Wire Braided

Outer Sheath : Halogen-free Cross Linked Thermoplastic Polyolefin(SHF1)

### Standards

Design : IEC 60092-350, 353

Insulation Material : IEC 60092 -351

Sheath Material : IEC 60092-359

Flammability: IEC 60331


Halogen--free: IEC60754-1, IEC60754-2

Smoke Emission: IEC 61034-1, IEC61034-2

### Cores & Size

Cores: 1, 2,3,4,5,7,10,12,14,16,19,24,37

Size (sqmm): 1.5, 2.5, 4, 6, 10, 16, 25, 35, 50, 70, 95, 120, 150, 180, 240, 300



## Features

Halogen-free, Low Smoke, Fire-Retardant.

