

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

IEC 60092 STANDARD CABLE (CHINA TYPE)


CJPF96/SC Flame Retardant Marine Power & Lighting Cable 0/6/1KV(Armoured)

ISO9001 Supplier

Class Certificate

Export Supply


CJPF96/SC Cable is galvanized steel wire braided and Flame retardant Marine Power & Control Cable. Cable Construction Conductor: Tinned Copper. IEC 60228 Class 2 Ins...

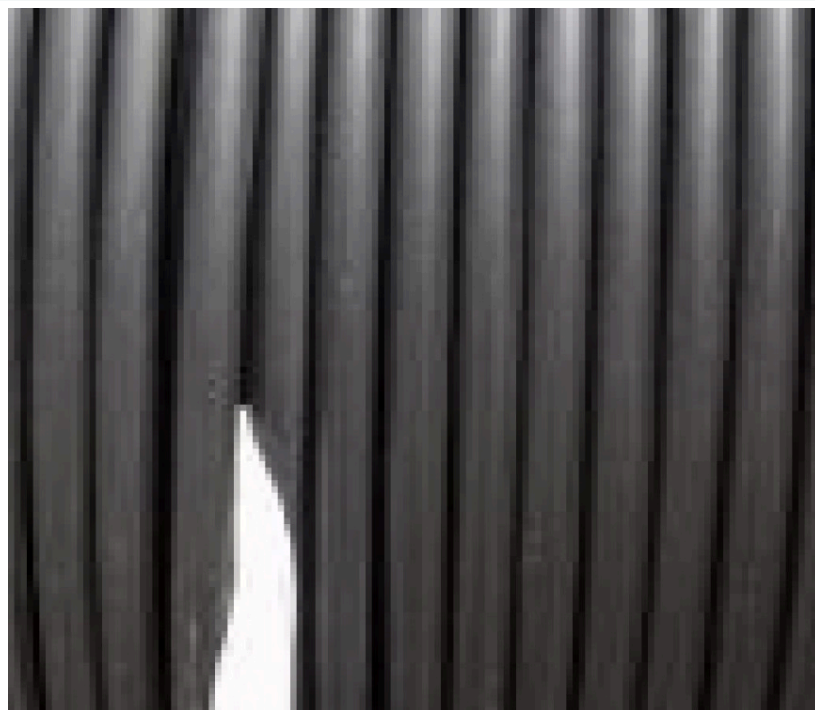

Key Highlights

Category	IEC 60092 Standard Cable (China Type)
Standard	EN
Material	Tinned Copper/XLPE insulation/SHF1 sheath/Galvanized Steel Wire Braided/...
Weight / Size	IEC 61034-1, IEC61034-2 Cores & Size Cores:
Certificate	LR, ABS,BV, GL, RINA, DNV, NK, KR, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.



Technical Specifications			
Category	IEC 60092 Standard Cable (China Type)	Model / SKU	CJPF96-SC-Flame-Retardant-Marine-Power-Lighting-Cable-0-6-1KV-Armoured
Standard	EN	Material	Tinned Copper/XLPE insulation/SHF1 sheath/Galvanized Steel Wire Braided/SHF1
Weight / Size	IEC 61034-1, IEC61034-2 Cores & Size Cores:	Surface	galvanized
Certificate	LR, ABS,BV, GL, RINA, DNV, NK, KR, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

CONTENTS	■ China CJPF96/SC Flame Retardant Marine Power & Lighting Cable 0/6/1KV(Armoured):	■ Cable Construction
	■ Standards	■ Cores & Size
	■ Feature	■ Application:

China CJPF96/SC Flame Retardant Marine Power & Lighting Cable 0/6/1KV(Armoured):



CJPF96/SC Cable is galvanized steel wire braided and Flame retardant Marine Power & Control Cable.

Cable Construction

Conductor: Tinned Copper. IEC 60228 Class 2

Insulation : XLPE Insulation

Inner Covering: Halogen-free Thermoplastic Polyolefin(SHF1)

Armour : Galvanized Steel Wire Braided.



Outer Sheath : Halogen-free Thermoplastic Polyolefin(SHF1)

Standards

Design : IEC 60092-350, 353

Insulation Material : IEC 60092 -351

Sheath Material : IEC 60092-359

Flame Retardant: IEC 60332-1 & IEC 60332-3 Category A

Halogen--free: IEC60754-1, IEC60754-2

Smoke Emission: IEC 61034-1, IEC61034-2

Cores & Size

Cores: 1, 2,3,4,5,7,10,12,14,16,19,24,37

Size (sqmm): 1.5, 2.5, 4, 6, 10, 16, 25, 35, 50, 70, 95, 120, 150, 180, 240, 300

Feature

Halogen-free, Low Smoke, Flame retardant.

Application:

The cable is fixed installation, used for power, lighting and control in most area and open deck area in ship.