IEC 60092 STANDARD CABLE (CHINA TYPE)


# CJPJ95/NC Fire Resistant Marine Power & Lighting Cable 0/6/1KV(Armoured)

ISO9001 Supplier

Class Certificate

Export Supply

CJPJ95/NC cable is galvanized steel wire braided and fire resistant marine power cable, the color of outer sheath is black. Cable Construction   Conductor: Tinned Copper. IEC 60228...

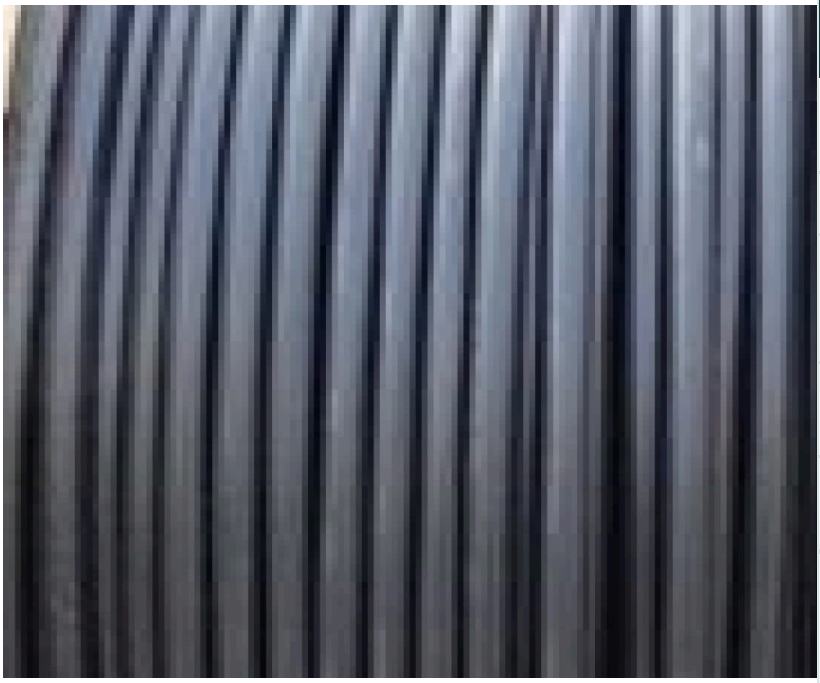

## Key Highlights

| | |
|---|---|
| **Category** | IEC 60092 Standard Cable (China Type) |
| **Standard** | DIN |
| **Material** | Tinned Copper/Mica Tape/XLPE insulation/SHF2 sheath/Galvanized Steel Wir... |
| **Weight / Size** | IEC 61034-1, IEC61034-2 Cores & Size Cores: |
| **Certificate** | LR, ABS,BV, GL, RINA, DNV, NK, KR, CCS |

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

## Technical Specifications

| | | | |
|---|---|---|---|
| **Category** | IEC 60092 Standard Cable (China Type) | **Model / SKU** | CJPJ95-NC-Fire-Resistant-Marine-Power-Lighting-Cable-0-6-1KV-Armoured |
| **Standard** | DIN | **Material** | Tinned Copper/Mica Tape/XLPE insulation/SHF2 sheath/Galvanized Steel Wire Braided/SHF2 Sheath |
| **Weight / Size** | IEC 61034-1, IEC61034-2 Cores & Size Cores: | **Surface** | galvanized |
| **Certificate** | LR, ABS,BV, GL, RINA, DNV, NK, KR, CCS | **Warranty** | 12 Months unless specified otherwise |
| **Origin** | China | | |

CONTENTS


- China CJPJ95/NC Fire Resistant Marine Power & Lighting Cable 0/6/1KV(Armoured):
- Standards
- Features
- Cable Construction
- Cores & Size
- Delivery


## China CJPJ95/NC Fire Resistant Marine Power & Lighting Cable 0/6/1KV(Armoured):




CJPJ95/NC cable is galvanized steel wire braided and fire resistant marine power cable, the color of outer sheath is black.

## Cable Construction

Conductor: Tinned Copper. IEC 60228 Class 2

Mica Tape

Insulation : XLPE Insulation

Inner Covering: Halogen-free Cross Linked Thermoset Polyolefin(SHF2)

Armour :Galvanized Steel Wire Braided

Outer Sheath : Halogen-free Cross Linked Thermoset Polyolefin(SHF2)

## Standards

Design : IEC 60092-350, 353

Insulation Material : IEC 60092 -351

Sheath Material : IEC 60092-359

Flammability: IEC 60331

Halogen--free: IEC60754-1, IEC60754-2

Smoke Emission: IEC 61034-1, IEC61034-2

## Cores & Size

Cores: 1, 2,3,4,5,7,10,12,14,16,19,24,37

Size (sqmm): 1.5, 2.5. 4, 6, 10, 16, 25, 35, 50, 70, 95, 120, 150, 180, 240, 300

## Features

Halogen-free, Low Smoke, Fire-Retardant.

## Delivery

We can delivery around the world according to Incoterms 2010.