

# Jinbo Marine

Marine & Offshore Equipment Datasheet


PRODUCT DATASHEET

IEC 60092 STANDARD CABLE (CHINA TYPE)

## CJPJ95/SC Flame Retardant Marine Power & Lighting Cable 0/6/1KV(Armoured)

- ISO9001 Supplier
- Class Certificate
- Export Supply


CJPJ95/SC Cable is Galvanized Steel Wire Braided and Flame retardant Marine Power & Control Cable 0.6/1KV. Cable Construction &nbsp; Conductor: Tinned strand Copper. IEC 60228 Clas...

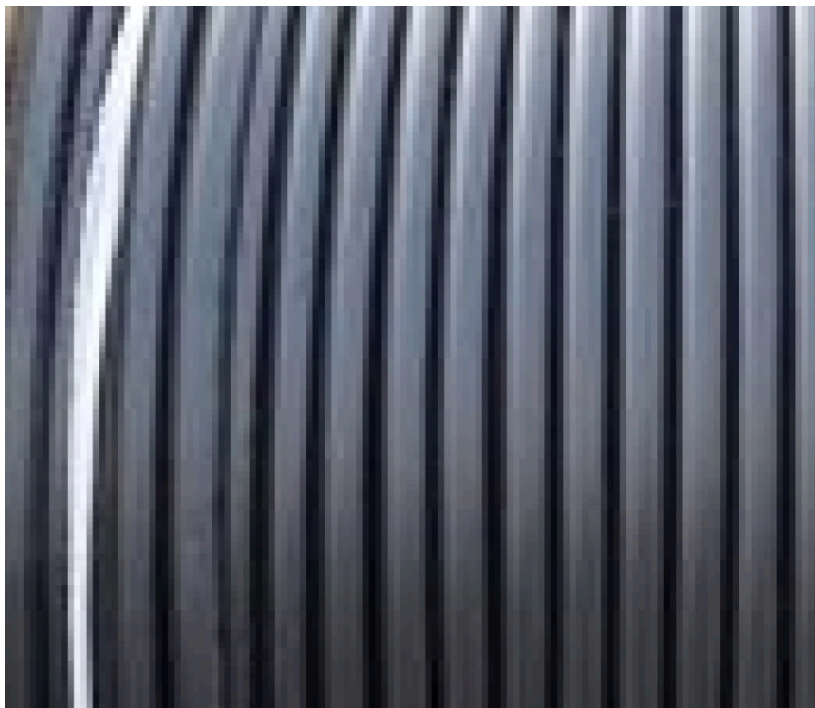

### Key Highlights

<b>Category</b>	IEC 60092 Standard Cable (China Type)
<b>Standard</b>	DIN
<b>Material</b>	Tinned Copper/XLPE insulation/SHF2 sheath/Galvanized Steel Wire Braided/...
<b>Weight / Size</b>	IEC 61034-1, IEC61034-2 Cores & Size Cores:
<b>Certificate</b>	LR, ABS,BV, GL, RINA, DNV, NK, KR, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.



Technical Specifications			
<b>Category</b>	IEC 60092 Standard Cable (China Type)	<b>Model / SKU</b>	CJPJ95-SC-Flame-Retardant-Marine-Power-Lighting-Cable-0-6-1KV-Armoured
<b>Standard</b>	DIN	<b>Material</b>	Tinned Copper/XLPE insulation/SHF2 sheath/Galvanized Steel Wire Braided/SHF2 sheath
<b>Weight / Size</b>	IEC 61034-1, IEC61034-2 Cores & Size Cores:	<b>Surface</b>	Galvanized
<b>Certificate</b>	LR, ABS,BV, GL, RINA, DNV, NK, KR, CCS	<b>Warranty</b>	12 Months unless specified otherwise
<b>Origin</b>	China		

CONTENTS			
■ China CJPJ95/SC Flame Retardant Marine Power & Lighting Cable 0/6/1KV(Armoured):	■ Cable Construction		
■ Standards	■ Cores & Size		
■ Features	■ Delivery		

## China CJPJ95/SC Flame Retardant Marine Power & Lighting Cable 0/6/1KV(Armoured):



CJPJ95/SC Cable is Galvanized Steel Wire Braided and Flame retardant Marine Power & Control Cable 0.6/1KV.

### Cable Construction

Conductor: Tinned strand Copper. IEC 60228 Class 2

Insulation : XLPE Insulation

Inner Covering: Halogen-free Cross Linked Thermoset Polyolefin(SHF2)

Armour : Galvanized Steel Wire Braided.



Outer Sheath : Halogen-free Cross Linked Thermoset Polyolefin(SHF2)

## Standards

Design : IEC 60092-350, 353

Insulation Material : IEC 60092 -351

Sheath Material : IEC 60092-359

Flammability: IEC 60332-1 & IEC 60332-3 Category A

Halogen--free: IEC60754-1, IEC60754-2

Smoke Emission: IEC 61034-1, IEC61034-2

## Cores & Size

Cores: 1, 2,3,4,5,7,10,12,14,16,19,24,37

Size (sqmm): 1.5, 2.5, 4, 6, 10, 16, 25, 35, 50, 70, 95, 120, 150, 180, 240, 300

## Features

Halogen-free, Low Smoke, Flame retardant

## Delivery

We can delivery around the world according to Incoterms 2010.