CENTRIFUGAL PUMP

# CLV Marine Vertical Centrifugal Pump

Description: Technical data: Model Capacity (m3/h) Head (m) Speed (r/min) NPSH (m) S...

ISO9001 Supplier

Class Certificate

Export Supply




## Key Highlights

| | |
|---|---|
| Category | Centrifugal Pump |
| Standard | EN |
| Certificate | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS |

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


## Technical Specifications

| | | | |
|---|---|---|---|
| Category | Centrifugal Pump | Model / SKU | CLV-Marine-Vertical-Centrifugal-Pump |
| Standard | EN | Certificate | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS |
| Warranty | 12 Months unless specified otherwise | Origin | China |

CONTENTS

- Description:
- Technical data:

## Description:

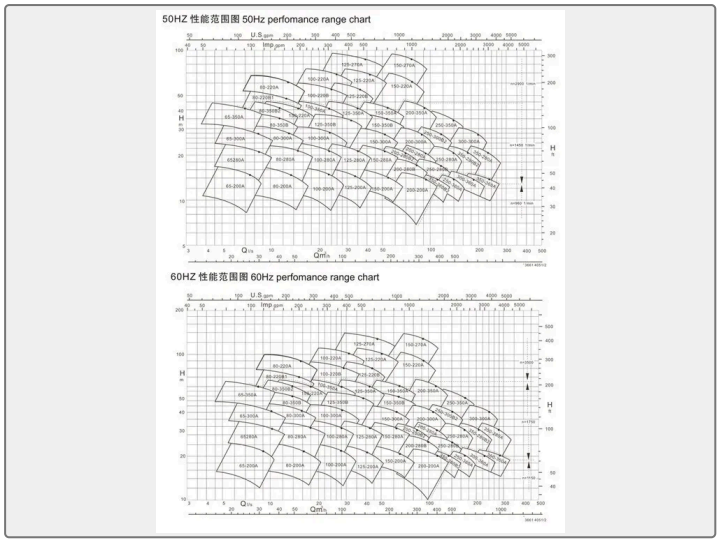


## Technical data:

| Model | Capacity (m3/h) | Head (m) | Speed (r/min) | NPSH (m) | Shaft Power kw | Efficiency % | Power (kw) |
|---|---|---|---|---|---|---|---|
| CLV65-200A | 27 | 14.5 | 1450 | 2.5 | 1.8 | 59.2 | 2.2 |
| CLV65-280A | 30 | 21 | 1450 | 2.5 | 3.1 | 55.3 | 4 |
| CLV65-300A | 30 | 28 | 1450 | 2.5 | 4.4 | 52 | 5.5 |
| CLV65-350A | 25 | 41 | 1450 | 2.5 | 6.1 | 45.8 | 7.5 |
| CLV80-200A | 48 | 14.5 | 1450 | 2.5 | 2.8 | 67.7 | 4 |
| CLV80-220B1 | 45 | 48 | 2900 | 4.0 | 9.8 | 60 | 11 |
| CLV80-220A | 45 | 62 | 2900 | 4.0 | 12 | 63.3 | 15 |
| CLV80-280A | 54 | 21.5 | 1450 | 3.0 | 4.5 | 70.3 | 5.5 |
| CLV80-300A | 46 | 28 | 1450 | 2.8 | 5.8 | 60.5 | 7.5 |
| CLV80-350B | 40 | 35 | 1450 | 2.5 | 6.9 | 55.3 | 11 |
| CLV80-350A | 54 | 41 | 1450 | 3.0 | 10.5 | 57.4 | 15 |
| CLV80-350B2 | 42 | 41 | 1450 | 2.5 | 8.4 | 55.8 | 11 |
| CLV100-200A | 83 | 14.5 | 1450 | 3.2 | 4.6 | 71.3 | 5.5 |
| CLV100-220B | 87 | 55 | 2900 | 4.5 | 18.5 | 70.4 | 22 |
| CLV100-220A | 95 | 68.5 | 2900 | 4.5 | 24.2 | 73.2 | 30 |
| CLV100-280A | 83 | 21 | 1450 | 3.0 | 6.4 | 74.2 | 7.5 |
| CLV100-300A | 83 | 28 | 1450 | 2.8 | 9.1 | 69.5 | 11 |
| CLV100-350A | 83 | 41 | 1450 | 3.2 | 14.2 | 65.3 | 18.5 |
| CLV125-200A | 116 | 14 | 1450 | 3.5 | 5.9 | 75 | 7.5 |

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| CLV125-220B | 128 | 55 | 2900 | 5.0 | 26.7 | 71.8 | 37 |
| CLV125-220A | 149 | 68.5 | 2900 | 5.5 | 36.9 | 75.3 | 45 |
| CLV125-270A | 140 | 86 | 2900 | 5.0 | 44.7 | 73.4 | 55 |
| CLV125-280A | 125 | 21 | 1450 | 3.5 | 9.6 | 74.5 | 11 |
| CLV125-350B | 116 | 34 | 1450 | 3.5 | 15.9 | 67.6 | 22 |
| CLV125-350A | 125 | 41 | 1450 | 3.5 | 19.8 | 70.5 | 30 |
| CLV150-350B2 | 190 | 35 | 1450 | 3.5 | 25.6 | 70.7 | 30 |
| CLV200-200A | 332 | 13.7 | 1450 | 4.0 | 15.9 | 77.9 | 18.5 |
| CLV200-280B | 290 | 17 | 1450 | 4.5 | 17.3 | 77.6 | 22 |
| CLV200-280A | 330 | 20.5 | 1450 | 4.5 | 23.4 | 78.7 | 30 |
| CLV200-280B2 | 250 | 20.5 | 1450 | 4.0 | 17.9 | 78.0 | 22 |
| CLV200-300A | 325 | 27.5 | 1450 | 4.5 | 30.3 | 80.3 | 37 |