

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

OTHER MARINE PUMP

CPT Series Marine Injection Pump

CPT series marine injection pump General description The pump suction flange axis perpendicular to the pump body axis, convenient installation. Has a self-priming performance, can work continuously steadily. No...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Other Marine Pump
Standard	DIN
Material	Cast steel, Stainless steel
Weight / Size	Hydrophobic system is mainly used in ships, also can be used for environ...
Certificate	CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	Other Marine Pump	Model / SKU	CPT-Series-Marine-Injection-Pump
Standard	DIN	Material	Cast steel,Stainless steel
Weight / Size	Hydrophobic system is mainly used in ships, also can be used for environmental protection, chemical industry, water conservancy, building materials, etc, for sea water, mixed liquid, river dredging, conveying powder, etc Structural Specifications Performance parameter Type Capacity Delivery suc'head working pressure water consumption weight m3/h m mpa m3/h kg CP5-0.7T 5 8 4 0.7 3.6 14 CP5-0.3T 5 5 4 0.3 6 17.2 CP10-1.0T 10 20 5 1 16.7 16 CP10-0.7T 10 8 4 0.7 7 20 CP10-0.3T 10 5 4 0.3 12 20.5 CP15-0.5T 15 11 7 0.5 24 26 CP15-0.3T 15 5 4 0.3 19 25.8 CP15-0.7T 15 15 4 0.7 27 28.5 CP20-0.7T 20 8 4 0.7 14 28.5 CP20-0.3T 20 5 4 0.3 24 26 CP30-0.7T 30 8 4 0.7 21 32 CP30-0.3T 30 5 4 0.3 36 50 CP40-0.3T 40 5 4 0.3 47 49.5 CP50-1.0T 50 20 5 1 64 52 CP50-0.7T 50 8 4 0.7 35 48 CP50-0.3T 50 6 3 0.3 55 56 CP60-0.7T 60 6 6 0.7 50 55.5 CP80-0.7T 80 10 5 0.7 90 75 CP100-0.7T 10 9 2 0.7 60 71.5 CP100-0.3T 100 6 3 0.3 110 73 CP100-0.2T 100 7 3 0.2 305 120 CP200-0.7T 200 9 2 0.7 120	Certificate	CCS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS


- CPT series marine injection pump
- Structural Specifications
- General description
- Performance parameter

CPT series marine injection pump

General description

The pump suction flange axis perpendicular to the pump body axis, convenient installation. Has a self-priming performance, can work continuously steadily. No moving parts, long service life. Hydrophobic system is mainly used in ships, also can be used for environmental protection, chemical industry, water conservancy, building materials, etc, for sea water, mixed liquid, river dredging, conveying powder, etc

Structural Specifications

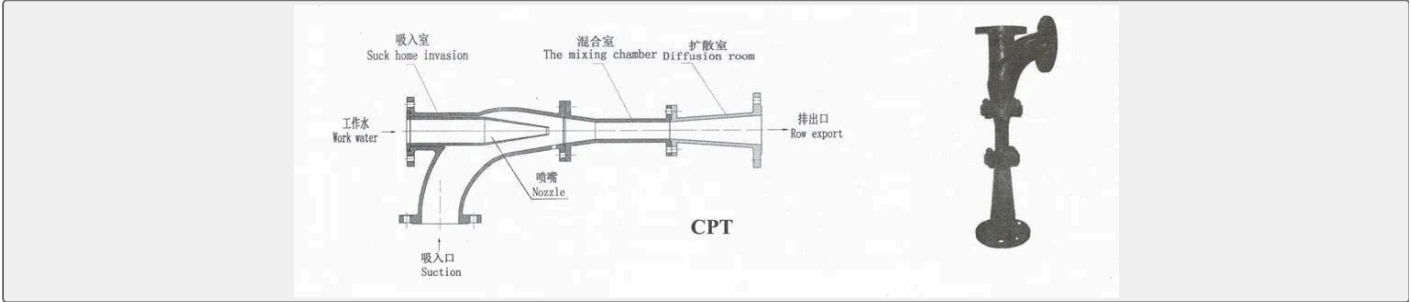

Performance parameter

Type	Capacity	Delivery	suc'head	working pressure	water consumption	weight
m ³ /h	m	m	mpa	m ³ /h	kg	
CP5-0.7T	5	8	4	0.7	3.6	14
CP5-0.3T	5	5	4	0.3	6	17.2
CP10-1.0T	10	20	5	1	16.7	16
CP10-0.7T	10	8	4	0.7	7	20
CP10-0.3T	10	5	4	0.3	12	20.5
CP15-0.5T	15	11	7	0.5	24	26
CP15-0.3T	15	5	4	0.3	19	25.8
CP15-0.7T	15	15	4	0.7	27	28.5
CP20-0.7T	20	8	4	0.7	14	28.5
CP20-0.3T	20	5	4	0.3	24	26
CP30-0.7T	30	8	4	0.7	21	32
CP30-0.3T	30	5	4	0.3	36	50
CP40-0.3T	40	5	4	0.3	47	49.5
CP50-1.0T	50	20	5	1	64	52
CP50-0.7T	50	8	4	0.7	35	48
CP50-0.3T	50	6	3	0.3	55	56

CP60-0.7T	60	6	6	0.7	50	55.5
CP80-0.7T	80	10	5	0.7	90	75
CP100-0.7T	10	9	2	0.7	60	71.5
CP100-0.3T	100	6	3	0.3	110	73
CP100-0.2T	100	7	3	0.2	305	120
CP200-0.7T	200	9	2	0.7	120	