

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

HAND PUMP

CS Series Hand Piston Pump Marine hand pump

ISO9001 Supplier

Class Certificate

Export Supply

Hand piston pump is suitable for various shipping pumping excluding hard particle or fiber of freshwater and seawater, and lubricant, oil, and other lubrication oils. This pump can be used in human en



Key Highlights

Category	Hand Pump
Standard	DIN
Material	Iron or Copper Alloy
Weight / Size	Model Explanation CS-20Y/H C-Marine use S-Hand pump 20-Inlet and outlet ...
Certificate	CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	Hand Pump	Model / SKU	CS-Series-Hand-Piston-Pump
Standard	DIN	Material	Iron or Copper Alloy
Weight / Size	<p>Model Explanation CS-20Y/H C-Marine use S-Hand pump 20-Inlet and outlet diameter 20mm Y/H-Iron cylinder or copper alloy CS-20Y(S-20)-Applicable to pumping oil or water CS-20H(SH-20)-Applicable to fresh water and sea water Structural Specifications</p> <p>Main Specification Name Unit</p> <p>Type CS-20Y/H CS-25Y/H CS-32Y/H CS-40Y/H S(SH)-20 S(SH)-25 S(SH)-32 S(SH)-40</p> <p>Capacity L/min 20 32 48 65</p> <p>Delivery head MPa 0.25-0.3 0.25-0.3 0.25-0.3 0.25-0.3 0.25-03</p> <p>Suction vacuum height MPa 0.06 0.06 0.06 0.06</p> <p>Cylinder diameter mm 65 75 88 95</p> <p>Piston stroke mm 68 80 90 96</p> <p>Reciprocating times Times/min 50 50 50 50</p> <p>Weight kg 5.8 7.5 10.5 12</p> <p>Pump size Type CS-20 CS-25 CS-32 A 180 205 225 B 152 180 220 C 63 70 81 D 213 220 249 E 134 150 165</p>	Certificate	CCS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS

- CS Series Hand Piston Pump
- Model Explanation CS-20Y/H
- Main Specification
- General
- Structural Specifications
- Pump size


CS Series Hand Piston Pump

General

Hand piston pump is suitable for various shipping pumping excluding hard particle or fiber of freshwater and seawater, and lubricant, oil, and other lubrication oils. This pump can be used in human engineering, fire, well water, kitchen sewage oil-water, transport department and so on the different places. Temperature of medium transported not to exceed 60°C.

Model Explanation CS-20Y/H


- C-Marine use



- S-Hand pump
- 20-Inlet and outlet diameter 20mm
- Y/H-Iron cylinder or copper alloy
- CS-20Y(S-20)-Applicable to pumping oil or water
- CS-20H(SH-20)-Applicable to fresh water and sea water




Structural Specifications

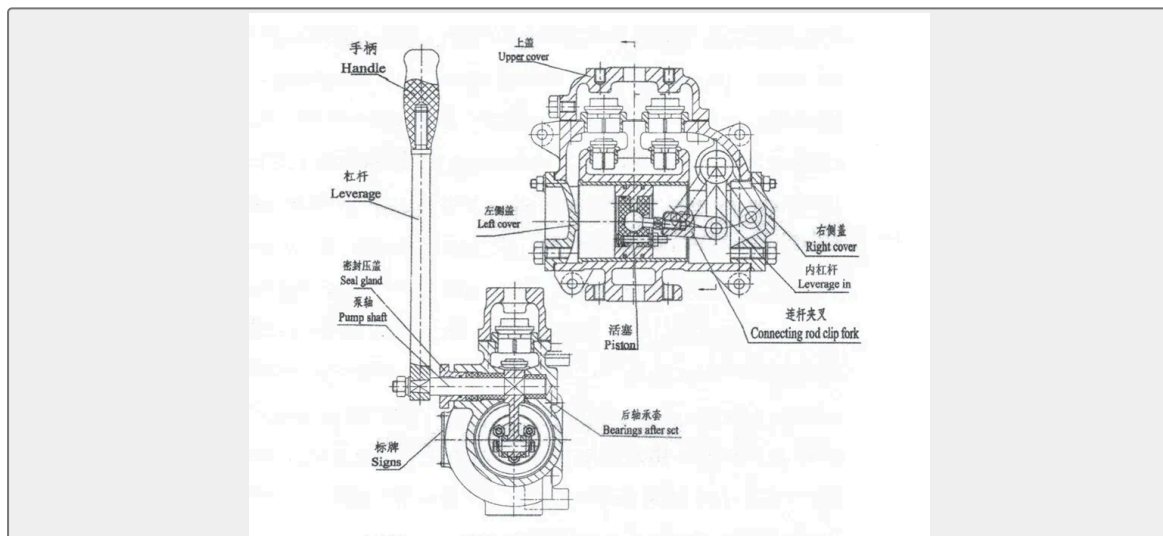

Main Specification

Name	Unit	Type			
		CS-20Y/H	CS-25Y/H	CS-32Y/H	CS-40Y/H
		S(SH)-20	S(SH)-25	S(SH)-32	S(SH)-40
Capacity	L/min	20	32	48	65
Delivery head	MPa	0.25-0.3	0.25-0.3	0.25-0.3	0.25-0.3



Suction vacuum height	MPa	0.06	0.06	0.06	0.06
Cylinder diameter	mm	65	75	88	95
Piston stroke	mm	68	80	90	96
Reciprocating times	Times/min	50	50	50	50
Weight	kg	5.8	7.5	10.5	12

Pump size

Type	CS-20	CS-25	CS-32
A	180	205	225
B	152	180	220
C	63	70	81
D	213	220	249
E	134	150	165