

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE ELECTRICAL INSTRUMENT

CW-1A CW-1B CW-2A Electronic Thermometer

ISO9001 Supplier

Class Certificate

Export Supply

CW-1A, CW-1B, CW-2A Electronic Thermometer are used to measure the temperature of the fluid which does not corrode copper and copper alloy, such as the temperature of water and oil of diesel engine in the range...



Key Highlights

Category	Marine Electrical Instrument
Standard	EN
Weight / Size	The accuracy of class 2.5 power supply is supplied by special power box ...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.




Technical Specifications			
Category	Marine Electrical Instrument	Model / SKU	CW-1A-CW-1B-CW-2A-Electronic-Thermometer
Standard	EN	Weight / Size	The accuracy of class 2.5 power supply is supplied by special power box or directly by DC 12 V power supply and DC 24 V power supply Type CW-1A CW-1B CW-2A Application It is used to measure the temperature of fluid which does not corrode copper and copper alloy, such as water temperature and oil temperature of diesel engine Specifications 0-100°C 0-100°C or 0-130°C 0-120°C Accuracy 2.5 Class Power Power supply through special power box or directly DC 24 V Power supply through special power box or directly Work environment Use a 12 volt DC power supply Use a 12 volt DC power supply Dimensions Without Lighting With Lighting Without Lighting Others The scale is divided into color bands Remark The indicator and sensor can be directly connected by cable or plug-in
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China CW-1A CW-1B CW-2A Electronic Thermometer:

CW-1A, CW-1B, CW-2A Electronic Thermometer are used to measure the temperature of the fluid which does not corrode copper and copper alloy, such as the temperature of water and oil of diesel engine in the range of 0-100 °C, 0-100 °C or 0-130 °C and 0-120 °C. The accuracy of class 2.5 power supply is supplied by special power box or directly by DC 12 V power supply and DC 24 V power supply



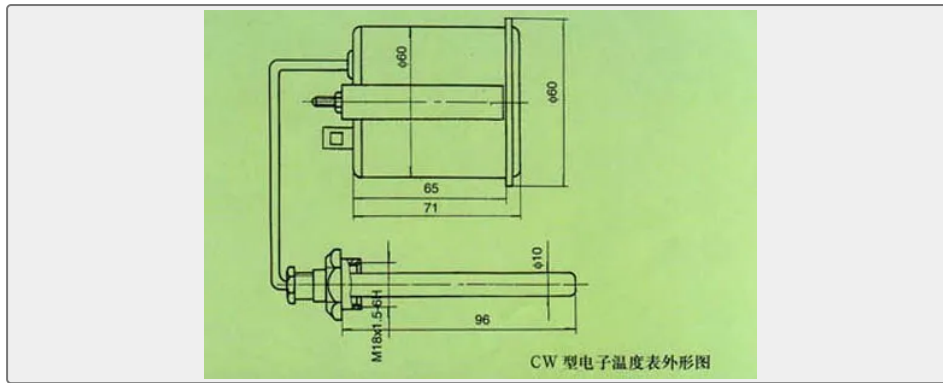

Type	CW-1A	CW-1B	CW-2A
Application	It is used to measure the temperature of fluid which does not corrode copper and copper alloy, such as water temperature and oil temperature of diesel engine		
Specifications	0-100°C	0-100°C or 0-130°C	0-120°C
Accuracy	2.5 Class		
Power	Power supply through special power box or directly	DC 24 V	Power supply through special power box or directly
Work environment	Use a 12 volt DC power supply		Use a 12 volt DC power supply
Dimensions	Without Lighting	With Lighting	Without Lighting
Others			The scale is divided into color bands
Remark	The indicator and sensor can be directly connected by cable or plug-in		