MARINE ELECTRICAL INSTRUMENT

# CW-1A CW-1B CW-2A Electronic Thermometer

ISO9001 Supplier

Class Certificate

Export Supply

CW-1A, CW-1B, CW-2A Electronic Thermometer are used to measure the temperature of the fluid which does not corrode copper and copper alloy, such as the temperature of water and oil of diesel engine in the range...




## Key Highlights


| | |
|---|---|
| **Category** | Marine Electrical Instrument |
| **Standard** | EN |
| **Weight / Size** | The accuracy of class 2.5 power supply is supplied by special power box ... |
| **Certificate** | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS |

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

| Technical Specifications | | | |
|---|---|---|---|
| **Category** | Marine Electrical Instrument | **Model / SKU** | CW-1A-CW-1B-CW-2A-Electronic-Thermometer |
| **Standard** | EN | **Weight / Size** | The accuracy of class 2.5 power supply is supplied by special power box or directly by DC 12 V power supply and DC 24 V power supply Type CW-1A CW-1B CW-2A Application It is used to measure the temperature of fluid which does not corrode copper and copper alloy, such as water temperature and oil temperature of diesel engine Specifications 0-100℃ 0-100℃ or 0-130℃ 0-120℃ Accuracy 2.5 Class Power Power supply through special power box or directly DC 24 V Power supply through special power box or directly Work environment Use a 12 volt DC power supply Use a 12 volt DC power supply Dimensions Without Lighting With Lighting Without Lighting Others The scale is divided into color bands Remark The indicator and sensor can be directly connected by cable or plug-in |
| **Certificate** | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS | **Warranty** | 12 Months unless specified otherwise |
| **Origin** | China | | |

## China CW-1A CW-1B CW-2A Electronic Thermometer:

CW-1A, CW-1B, CW-2A Electronic Thermometer are used to measure the temperature of the fluid which does not corrode copper and copper alloy, such as the temperature of water and oil of diesel engine in the range of 0-100 ℃, 0-100 ℃ or 0-130 ℃ and 0-120 ℃. The accuracy of class 2.5 power supply is supplied by special power box or directly by DC 12 V power supply and DC 24 V power supply

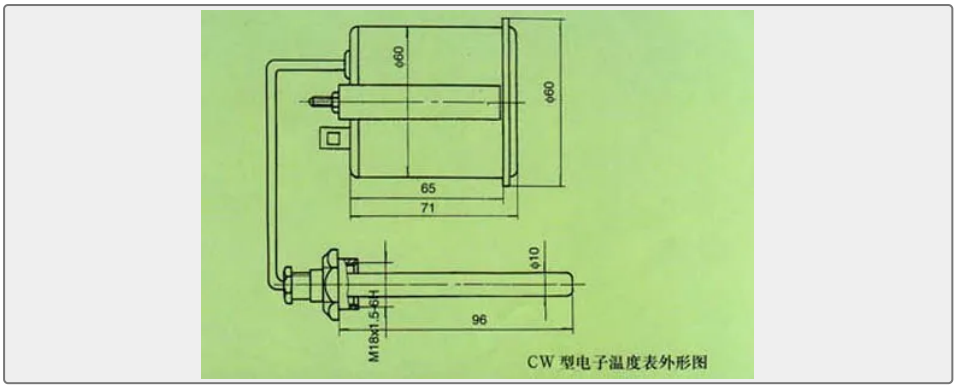


| Type | CW-1A | CW-1B | CW-2A |
|---|---|---|---|
| Application | It is used to measure the temperature of fluid which does not corrode copper and copper alloy, such as water temperature and oil temperature of diesel engine | | |
| Specifications | 0-100℃ | 0-100℃ or 0-130℃ | 0-120℃ |
| Accuracy | 2.5 Class | | |
| Power | Power supply through special power box or directly | DC 24 V | Power supply through special power box or directly |
| Work environment | Use a 12 volt DC power supply | | Use a 12 volt DC power supply |
| Dimensions | Without Lighting | With Lighting | Without Lighting |
| Others | | | The scale is divided into color bands |
| Remark | The indicator and sensor can be directly connected by cable or plug-in | | |