MEDIUM PRESSURE WATER COOLED MARINE AIR COMPRESSOR


CZ-20/30SZK Series Middle Pressure Water Cooling Marine Air Compressor

ISO9001 Supplier

Class Certificate

Export Supply

Description: 1.   Type：Single-row, V- type, 2nd-stage compression piston-style. 2.   High efficiency, Light weight, Small volume, Low noise and reliab...

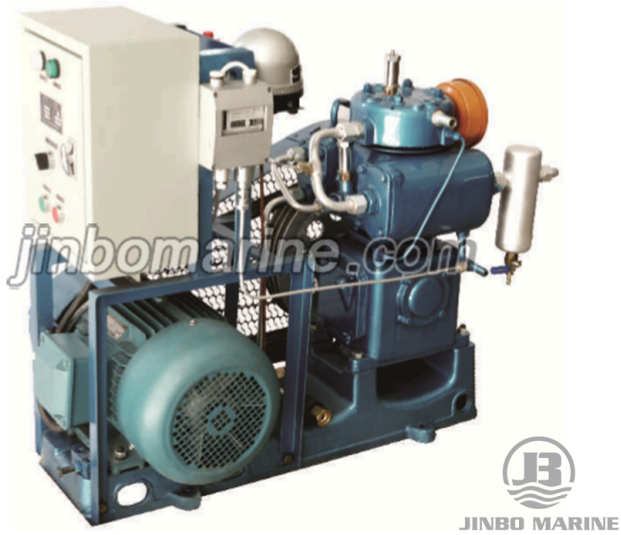

Key Highlights

Category	Medium Pressure Water Cooled Marine Air Compressor
Standard	DIN
Weight / Size	2. High efficiency, Light weight, Small volume, Low noise and reliabl...
Certificate	CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications

Category	Medium Pressure Water Cooled Marine Air Compressor	**Model / SKU**	CZ-20-30SZK-Series-Middle-Pressure-Water-Cooling-Marine-Air-Compressor
Standard	DIN	**Weight / Size**	2. High efficiency, Light weight, Small volume, Low noise and reliable running.
Certificate	CCS	**Warranty**	12 Months unless specified otherwise
Origin	China		

CONTENTS

- Description:
- Technical data:

Description:

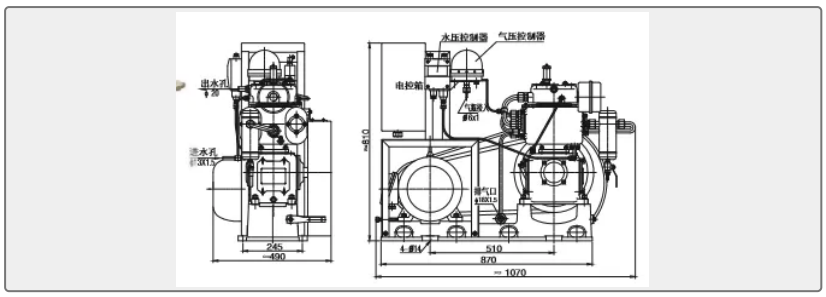

1. Type：Single-row, V- type, 2nd-stage compression piston-style.

2. High efficiency, Light weight, Small volume, Low noise and reliable running.

3. Discharge capacity: 20~120 m3 /h, discharge pressure: 3.0 MPa.

4. Products with manual/automatic shutdown, starting, unloading and pressure relief function.

5. Drive type：Coupling drive or V- belt drive.

6. Mainly used for starting the main engine of ships.

Customers orders are acceptable:

1. Main and standby machine are provided as well.

2. Temperature control function.

3. Inlet pressure controller.

4. Exhaust outlet high pressure hose.

Technical data:

Model	Displacement		Specified Pressure	Rotating Speed	Motor Power		Dimension（L×W×H）	Weigh t
	m3/ h	m3/ min	Mpa	r/min	kW	HP	mm	kg
CZ-20/30SZK (Direct Connection)	20	0.34	3	960	5.5	7.5	900×600×850	250
CZ-20/30SZK				1000			1070×490×810	225
CV-30/30 (Direct Connection)	30	0.5		720	7.5	10	1230×730×690	330
CV-40/30 (Direct Connection)	40	0.67		870	11	15	1230×730×690	340
CV-50/30 (Direct Connection)	50	0.83		970	11	15	1230×730×690	340
CV-90/30 (Direct Connection)	90	1.5		730	22	30	1600×1010×1050	900
CV-120/30 (Direct Connection)	120	2		975	30	40	1600×1010×1050	1000