

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE KITCHEN GALLEY

DAM6 Marine industry Tumble Dryer

DAM6 Marine industry Tumble Dryer 1.Open the door before the drum heavy washing machine. 2.Stainless steel cylinder inside and outside. 3.Full automatic control. 4.Electric heating system and safety control devi...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Marine Kitchen Galley
Standard	EN
Material	SS
Weight / Size	DAM6 Marine industry Tumble Dryer Specification Model Voltage Capacity R...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	Marine Kitchen Galley	Model / SKU	DAM6-Marine-industry-Tumble-Dryer
Standard	EN	Material	SS
Weight / Size	DAM6 Marine industry Tumble Dryer Specification Model Voltage Capacity Rating Size(WxDxH)mm Weight DAM6 380-415V/3P/50Hz 440-480V/3P/60Hz 6.5kg 3Kw 595x585x850 45kg DAMT9 380-415V/3P/50Hz 440-480V/3P/60Hz 9kg 6Kw 683x706x1030 120kg T9 380-415V/3P/50Hz 440-480V/3P/60Hz 9kg 12Kw 795x815x1465 170kg T11 380-415V/3P/50Hz 440-480V/3P/60Hz 11kg 13Kw 805x1070x1675 230kg T16 380-415V/3P/50Hz 440-480V/3P/60Hz 16kg 24Kw 805x1280x1675 250kg T24 380-415V/3P/50Hz 440-480V/3P/60Hz 24kg 30Kw 965x1270x1975 280kg	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS


- DAM6 Marine industry Tumble Dryer

- DAM6 Marine industry Tumble Dryer Specification

DAM6 Marine industry Tumble Dryer

- 1.Open the door before the drum heavy washing machine.
- 2.Stainless steel cylinder inside and outside.
- 3.Full automatic control.
- 4.Electric heating system and safety control device.
- 5.European advanced technology and production technology.

DAM6 Marine industry Tumble Dryer Specification

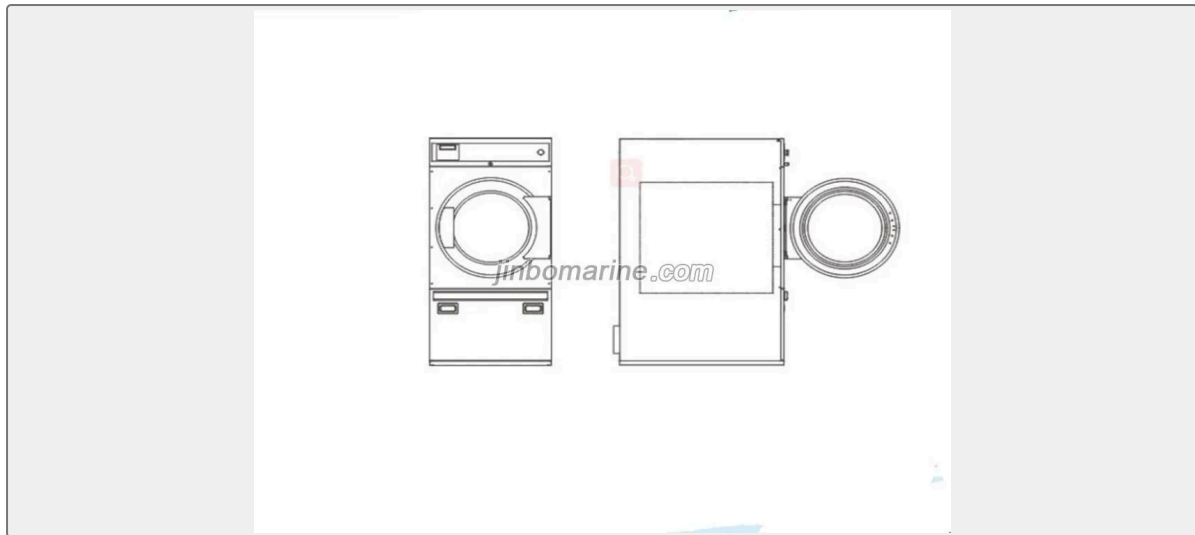

Model	Voltage	Capacity	Rating	Size(WxDxH)mm	Weight
DAM6	380-415V/3P/50Hz 440-480V/3P/60Hz	6.5kg	3Kw	595x585x850	45kg
DAMT9	380-415V/3P/50Hz 440-480V/3P/60Hz	9kg	6Kw	683x706x1030	120kg
T9	380-415V/3P/50Hz 440-480V/3P/60Hz	9kg	12Kw	795x815x1465	170kg
T11	380-415V/3P/50Hz 440-480V/3P/60Hz	11kg	13Kw	805x1070x1675	230kg
T16	380-415V/3P/50Hz 440-480V/3P/60Hz	16kg	24Kw	805x1280x1675	250kg
T24	380-415V/3P/50Hz 440-480V/3P/60Hz	24kg	30Kw	965x1270x1975	280kg