


Products feature and products certification

Flameproof and increased safety type of explosion-proof switch, Explosion proof marked IIC T6, it can work normally under the temperature -20 °C ~ +50 °C. The shell is made of high strength high quality brass precision manufacturing forming. With good electrical properties and good waterproof performance. Protection class: P56. Voltage: 380V Current: 16A. Cable outside diameter is diameter 13mm.

This lamp has been inspected and certified by China National Lighting Fitting Quality Supervision Testing center and National Supervision and Examination Center for Explosion protected and Safety of Luminaire (NECESL).

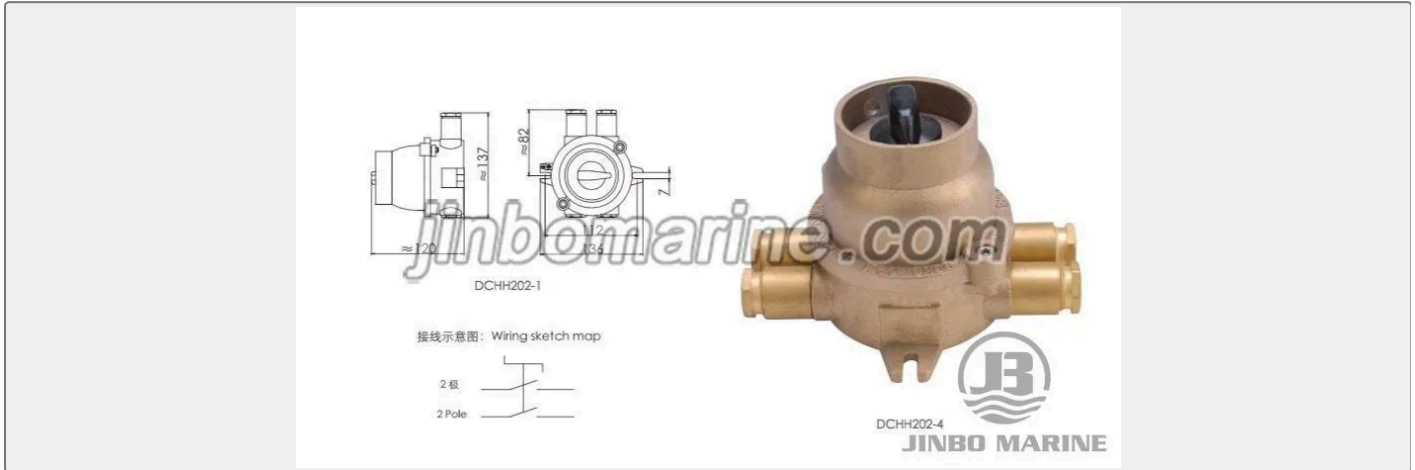

Code	Type	Weight(kg)
14105/2	DCHH202-1	1.90kgs
14105/D	DCHH202-2	1.90kgs
14105/3	DCHH202-3	2.0kgs
14105/4	DCHH202-4	2.1kgs