YHC MARINE WHISTLE SYSTEM

DDX-1 Electric Whistle Signal Unit

Colour: RAL 7035 Shell Mateiral: Q235B Voltage AC220V/DC24V Power: ...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	YHC Marine Whistle System
Standard	DIN
Weight / Size	No Name & Descprition Type Weight IP Rating 1 Whistle contrller DDQ-1A 1...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications


Category	YHC Marine Whistle System	**Model / SKU**	DDX-1-Electric-Whistle-Signal-Unit
Standard	DIN	**Weight / Size**	No Name & Descprition Type Weight IP Rating 1 Whistle contrller DDQ-1A 1.8 IP22 2 100W Electric whistle signal unit DDX-1 11.5 IP22 3 200W Electric Whistle signal unit DDX-1 11.5 IP22 4 Marine Whistle YHC-100 19 IP22 5 Marine Whistle YHC-200 20 IP22 6 Marine Whistle Button HDQ-AN 0.2 IP22 7 Marine Whistle Button HDG-AN 0.5 IP22 8 Marine Whistle Button HDG-AN 0.5 IP22
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	**Warranty**	12 Months unless specified otherwise
Origin	China		

CONTENTS

- China DDX-1 Electric Whistle Signal Unit:
- How to use?
- YHC Electric Hom Control system Schematic Diagram
- System composotion:

China DDX-1 Electric Whistle Signal Unit:

Colour:	RAL 7035
Shell Mateiral:	Q235B
Voltage	AC220V/DC24V
Power:	100W/200W
Power Consumption:	250W/500W

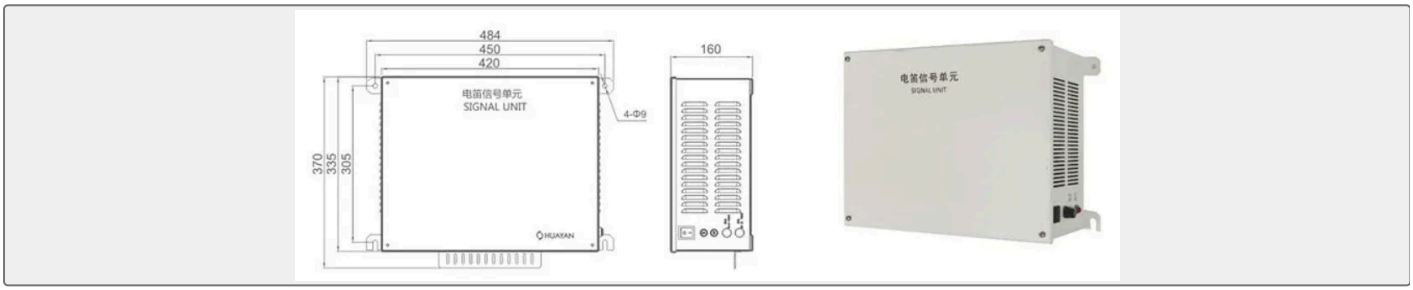

YHC Electric Hom Control system Schematic Diagram



How to use?

Selected working mode via the "Mode" button on panel and the corresponding indicator light will be ON and then select work period of 60S, 90S or 120S via "Time" button; and then select type of signal: one long whistle, one long whistle and one short whistle, one long whistle and two short whistles, one long whistle and three short whistles, one short and one long and one short whistle and two long whistes (one long whistle is for 4-6s, one short whistle is about 1s, the interval between the long and short whistle or between two short whistles is about 1s and the interval for the two long whistles is about 2s), the controller sends signals for the control whistles periodically and a set of passive contact is output as the automatic rhythm changes. Press the corresponding signal button for immediate stop.

Manual control: Change the switch to manual level ,send the signal by hand.

System composotion:

No	Name & Descprition	Type	Weight	IP Rating
1	Whistle contrller	DDQ-1A	1.8	IP22
2	100W Electric whistle signal unit	DDX-1	11.5	IP22
3	200W Electric Whistle signal unit	DDX-1	11.5	IP22
4	Marine Whistle	YHC-100	19	IP22
5	Marine Whistle	YHC-200	20	IP22
6	Marine Whistle Button	HDQ-AN	0.2	IP22
7	Marine Whistle Button	HDG-AN	0.5	IP22
8	Marine Whistle Button	HDG-AN	0.5	IP22