MARINE LIGHTING FIXTURES


DZ-L1 Solar Navigation Light

ISO9001 Supplier

Class Certificate

Export Supply

Model: DZ-L1/DZ-L1S Visible range:0-3km(About 2 NM) Rated power:1.5W Battery capacity (lithium cell):3600mAh Working voltage:3.7V Charging current:150mA Discharging current:320mA Protection grade:IP65 Working te...

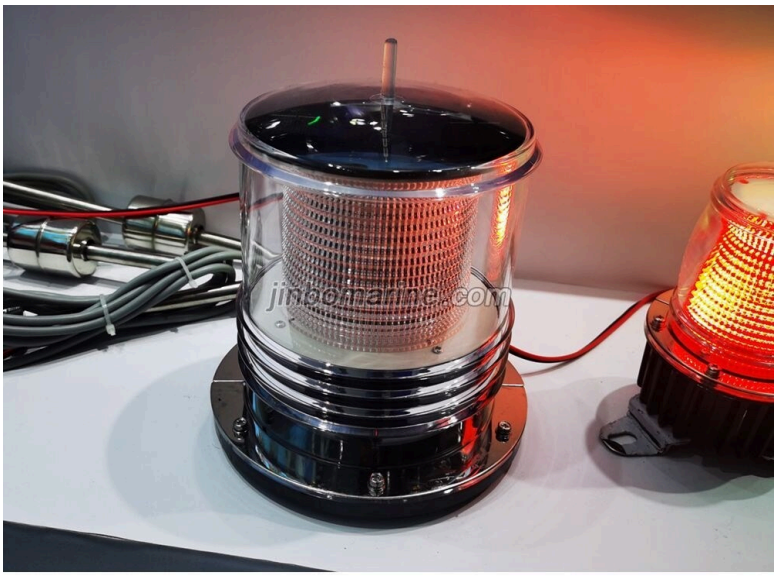

Key Highlights

Category	Marine Lighting Fixtures
Standard	EN
Material	DZ-L1/DZ-L1S Visible range:0-3km(About 2 NM) Rated power:1.5W Battery ca...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Marine Lighting Fixtures	**Model / SKU**	DZ-L1-Solar-Navigation-Light
Standard	EN	**Material**	DZ-L1/DZ-L1S Visible range:0-3km(About 2 NM) Rated power:1.5W Battery capacity (lithium cell):3600mAh Working voltage:3.7V Charging current:150mA Discharging current:320mA Protection grade:IP65 Working temperature:-10℃~55℃ Housing material:PC Solar panel material:Polysilicon Light source:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	**Warranty**	12 Months unless specified otherwise
Origin	China		

China DZ-L1 Solar Navigation Light:

Model: DZ-L1/DZ-L1S
Visible range:0-3km(About 2 NM)
Rated power:1.5W
Battery capacity (lithium cell):3600mAh
Working voltage:3.7V
Charging current:150mA
Discharging current:320mA
Protection grade:IP65
Working temperature:-10℃~55℃
Housing material:PC
Solar panel material:Polysilicon
Light source: 18*chip LED
Light color: red/white/green/yellow(other color can be customized)
Flash frequency changes with the working voltage, if working voltage higher, it flashes faster, and vice versa
Application : ocean、river、road,engineering,etc

