

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE CALORIFIER

DZG Series Electric Steam Heating Calorifier

ISO9001 Supplier

Class Certificate

Export Supply

DZG Series Electric Steam Heating Calorifier: This series electric steam heating calorifier is suitable for all kinds of ship which have the steam source or power source (AC 3P/380V/50Hz or AC 3P/440V/60H...



Key Highlights

Category	Marine Calorifier
Standard	EN
Material	Stainless steel 304
Weight / Size	Steam Press DZG-0.12 0.12 0.4Mpa 15°C 65°C 0.3Mpa DZG-0.2 0.2 DZG-0.3 0.3 ...
Certificate	CCS, BV, ABS, GL , LR, NK

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.




Technical Specifications			
Category	Marine Calorifier	Model / SKU	DZG-Series-Electric-Steam-Heating-Calorifier
Standard	EN	Material	Stainless steel 304
Weight / Size	Steam Press DZG-0.12 0.12 0.4Mpa 15°C 65°C 0.3Mpa DZG- 0.2 0.2 DZG-0.3 0.3 DZG-0.5 0.5 DZG-1.0 1 DZG-1.5 1.5 DZG-0.12 Steam Heating Capacity kg/h Steam Consume kg/h Electric Heater Power KW Power Supply Weight kg DZG-0.2 275 27.5 90 3P/380V/50HZ 3P/440V/60HZ 210 DZG-0.3 450 45 140 245 DZG-0.5 750 75 180 330 DZG-1.0 1200 120 280 400 DZG-1.5 3250 325 360 590 4900 490 540 760	Certificate	CCS, BV, ABS, GL , LR, NK
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS

- DZG Series Electric Steam Heating Calorifier:

- Technical Data:

DZG Series Electric Steam Heating Calorifier:

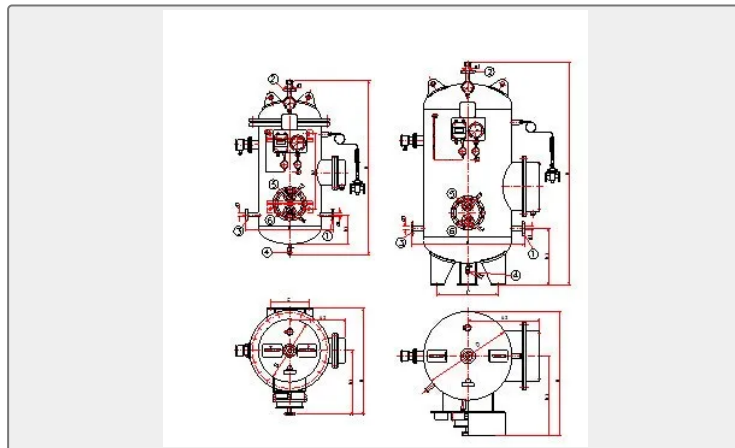

This series electric steam heating calorifier is suitable for all kinds of ship which have the steam source or power source (AC 3P/380V/50Hz or AC 3P/440V/60Hz.) to product hot water, It can supply the hot water for crewmen.

Technical Data:

Type	volume m3	Working Pressure	Inlet Temp.	Outlet Temp.	Steam Press



DZG-0.12	0.12	0.4Mpa	15°C	65°C	0.3Mpa
DZG-0.2	0.2				
DZG-0.3	0.3				
DZG-0.5	0.5				
DZG-1.0	1				
DZG-1.5	1.5				
DZG-0.12	Steam Heating Capacity kg/h	Steam Consume kg/h	Electric Heater Power KW	Power Supply	Weight kg
DZG-0.2	275	27.5	90	3P/380V/50HZ 3P/440V/60HZ	210
DZG-0.3	450	45	140		245
DZG-0.5	750	75	180		330
DZG-1.0	1200	120	280		400
DZG-1.5	3250	325	360		590
4900	490	540	760		