MARINE WINDLASS


Double gypsy Windlass

ISO9001 Supplier

Class Certificate

Export Supply

Double gypsy Windlass General description The windlass are for heaving, launching and mooring, which are in accordance with ISO4568-1986<>. They are driven by hand, electric, hydraulic and diesel engine...

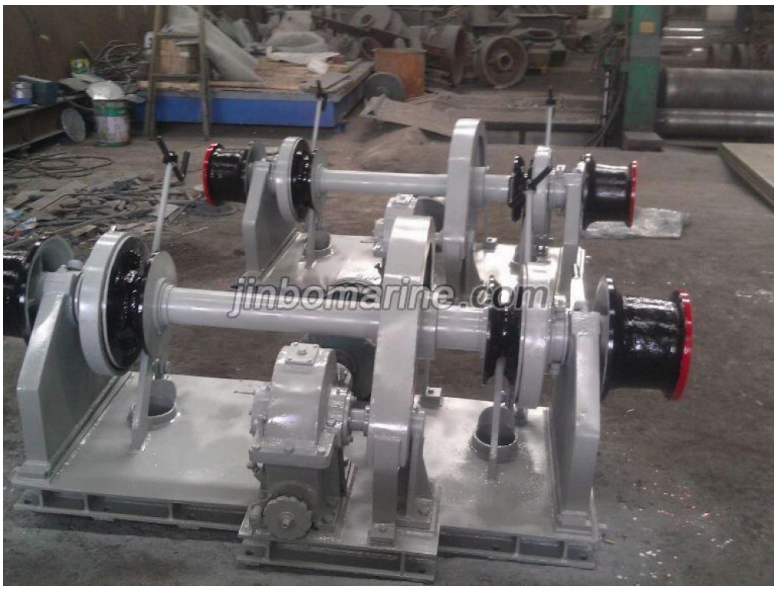

Key Highlights

Category	Marine Windlass
Standard	ISO
Material	Cast steel
Certificate	ABS,LR, BV, GL, CCS, RINA, IRS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Marine Windlass	**Model / SKU**	Double-gypsy-Windlass
Standard	ISO	**Material**	Cast steel
Certificate	ABS,LR, BV, GL, CCS, RINA, IRS	**Warranty**	12 Months unless specified otherwise
Origin	China		

China Double gypsy Windlass:

Double gypsy Windlass

General description

The windlass are for heaving, launching and mooring, which are in accordance with ISO4568-1986<>. They are driven by hand, electric, hydraulic and diesel engine. Widely used onboard the ship, can be lift up two anchor at one time with easy operation and longer life period.

Main technical parameter

anchor chain diam	working load		over loading		loading support		nominal speed	Drum load	Nominal speed	Cable capacity	Mooring line load
(mm)	AM2	AM3	AM2	AM3	AM2	AM3	m/min	Kn	m/min	m	Kn
17.5	13	14.6	19.5	21.9	80	115	9	10	10	Φ11x100	8
19	15.3	17.2	23	25.8	95	135	9	15	10	Φ13x100	10
20	17.9	20	26.9	30	110	157	9	20	10	Φ13x100	10
22	20.6	23	30.9	34.5	126	180	9	20	15	Φ15x100	15
24	24.5	27.4	36.8	41.1	149	214	9	20	15	Φ15x100	20
26	28.7	32.1	43.1	48.2	175	250	9	20	10	Φ22x100	20
28	33.3	37.2	50	55.8	202	289	9	20	10	Φ22x120	20
30	38.3	42.8	57.5	64.2	231	330	9	30	10	Φ22x120	30
32	43.5	48.6	65.3	72.9	261	374	9	30	9	Φ20x120	30
34	49.1	54.9	73.3	82.4	294	421	9	40	9	Φ20x120	30
36	55.1	61.6	82.7	92.4	329	470	9	30	12	Φ20x120	30
38	61.4	68.9	92.1	103.4	365	522	9	40	15	Φ22x150	40
40	68	76	102	114	402	576	9	40	9	Φ22x150	40

42	75	83.8	1125.7	1442	632	9	40	15	Φ22x150	50
44	82.3	92	1235	1383	4831	691	9	50	15	Φ26x200	50
46	89.9	1005	1349	1508	5263	753	9	50	18	Φ26x200	50
48	97.9	1094	1469	1641	5706	816	9	60	10	Φ26x200	50
50	106.3	1188	1595	1782	6176	882	9	80	15	Φ26x200	50