

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MANUAL OPERATED FIRE MONITOR


Electric Fire Monitor 5L/S

Electric Fire Monitor 5L/S Flow Range: 5L/S (80GPM) Working Pressure: 6 bar~ 8 bar Max
Reach @ Max Flow: 40M Max. Range of motion: +/-90°Vert , 350°Rot Max fog angle : 120°
Turning speed : 18 degrees/sec Materia...

ISO9001 Supplier

Class Certificate

Export Supply

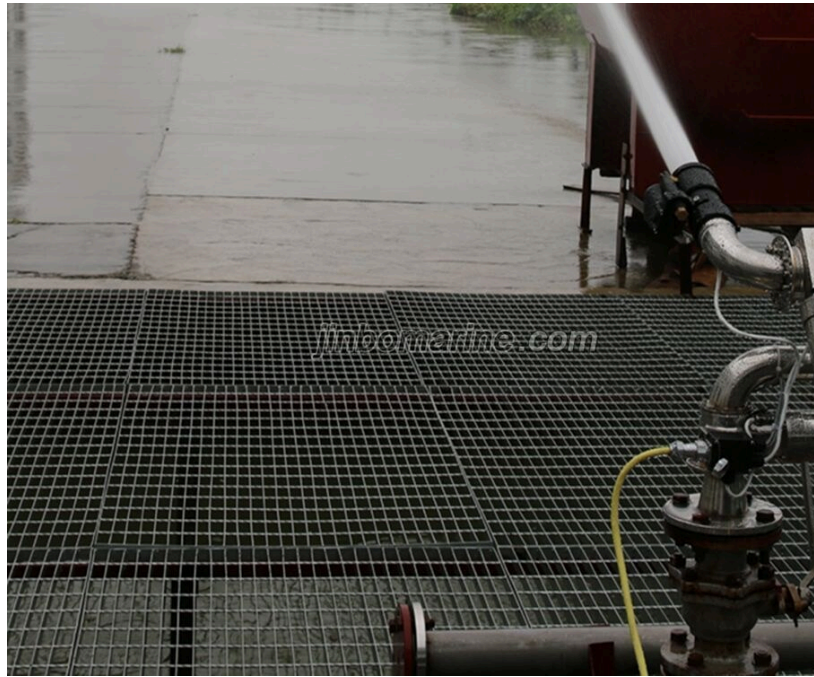

Key Highlights

Category	Manual Operated Fire Monitor
Standard	EN
Material	+/-90°Vert , 350°Rot Max fog angle : 120° Turning speed : 18 degrees/sec Ma...
Weight / Size	+/-90°Vert , 350°Rot Max fog angle : 120° Turning speed : 18 degrees/sec Ma...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.



Technical Specifications			
Category	Manual Operated Fire Monitor	Model / SKU	Electric-Fire-Monitor-5L-S
Standard	EN	Material	+/-90°Vert , 350°Rot Max fog angle : 120° Turning speed : 18 degrees/sec Material (body) : 304L Stainless Steel, 316L Stainless Steel is also available Material (Gear) : Bronze Material (nozzle) : Aluminum power supply : 12/24VDC or 100-230VAC Power Consumption normal/Max : 50W/150W Weight incl.
Weight / Size	+/-90°Vert , 350°Rot Max fog angle : 120° Turning speed : 18 degrees/sec Material (body) : 304L Stainless Steel, 316L Stainless Steel is also available Material (Gear) : Bronze Material (nozzle) : Aluminum power supply : 12/24VDC or 100-230VAC Power Consumption normal/Max : 50W/150W Weight incl.	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

China Electric Fire Monitor 5L/S:

Electric Fire Monitor 5L/S

Flow Range: 5L/S (80GPM)

Working Pressure: 6 bar~ 8 bar

Max Reach @ Max Flow: 40M

Max. Range of motion: +/-90°Vert , 350°Rot

Max fog angle : 120°

Turning speed : 18 degrees/sec

Material (body) : 304L Stainless Steel, 316L Stainless Steel is also available

Material (Gear) : Bronze

Material (nozzle) : Aluminum

power supply : 12/24VDC or 100-230VAC

Power Consumption normal/Max : 50W/150W

Weight incl. nozzle : appox 17kg


Cable Length Monitor- CPU : 5m

Cable Length Joystick-CPU : 5m standard/ other length available

Pump requirement for minimum performance : 5L/S@ 6 bar

Pipe dimensions for installation: 2 Inch

Monitor Inlet : 2" male BSP or DN65 flange



Monitor Outlet : 2 inch (50mm)

Water way size: 2 inch

PACKAGE: SS MONITOR, NOZZLE, CONTROL BOX, JOYSTICK, CABLES, WIRELESS CONTROL (OPTIONAL)

