

# Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

HOOK

## Eye Slip Hooks H324

Similar Name US Type Eye Slip Hooks H324 Eye Slip Hooks H324 Drop Forged Eye Slip Hooks H324 Galv Eye Slip Hooks H324 Lifting Eye Slip Hooks H324 Main Specification ...

ISO9001 Supplier

Class Certificate

Export Supply



### Key Highlights

Category	Hook
Standard	EN
Material	45# Steel
Weight / Size	Similar Name US Type Eye Slip Hooks H324 Eye Slip Hooks H324 Drop Forged...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.



Technical Specifications			
Category	Hook	Model / SKU	Eye-Slip-Hooks-H324
Standard	EN	Material	45# Steel
Weight / Size	Similar Name US Type Eye Slip Hooks H324 Eye Slip Hooks H324 Drop Forged Eye Slip Hooks H324 Galv Eye Slip Hooks H324 Lifting Eye Slip Hooks H324 Main Specification Forging Technology 45# Steel Size Table Size of Chain Working Load Limit DIMENSIONS(in) Weight (lbs) H-324 A-324 B E R 1/4" 1,950 2750 '1/2 15/16 2-17/32 0.4 5/16" 2,875 4300 '5/8 '1 1/16 2-29/32 0.7 3/8" 4,000 5250 23/32 '1 5/16 '3 5/16 1 7/16" 5,000 7000 13/16 '1 9/16 '3 7/8 1.56 1/2" 6,500 9000 15/16 1 11/16 4-9/32 2.31 5/8" 9,250 13500 2 2 5-7/32 3.78 3/4" 12,500 19250 '2 1/8 '2 1/8 5-25/32 6.56	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

## CONTENTS

- Similar Name
- Size Table

- Main Specification

## Similar Name

US Type Eye Slip Hooks H324

Eye Slip Hooks H324

Drop Forged Eye Slip Hooks H324

Galv Eye Slip Hooks H324


Lifting Eye Slip Hooks H324

## Main Specification

Forging Technology

45# Steel

## Size Table

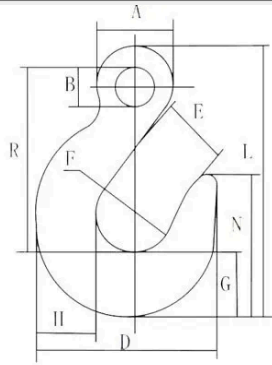

Size of Chain	Working Load Limit		DIMENSIONS(in)		Weight (lbs)	R
	H-324	A-324	B	E		
1/4"	1,950	2750	1/2	15/16	2-17/32	0.4
5/16"	2,875	4300	5/8	1 1/16	2-29/32	0.7
3/8"	4,000	5250	23/32	1 5/16	3 5/16	1
7/16"	5,000	7000	13/16	1 9/16	3 7/8	1.56
1/2"	6,500	9000	15/16	1 11/16	4-9/32	2.31
5/8"	9,250	13500	2	2	5-7/32	3.78
3/4"	12,500	19250	2 1/8	2 1/8	5-25/32	6.56