

Jinbo Marine

Marine & Offshore Equipment Datasheet


PRODUCT DATASHEET

TWISTLOCK

F1-1L Rotation Twistlock

Specification: Min.B.L.Tension:500KN Min.B.L.Shear:420kN Finish:Hot dip galvanized.
 Material:High tensile steel Dimensions according to requirement.

- ISO9001 Supplier
- Class Certificate
- Export Supply

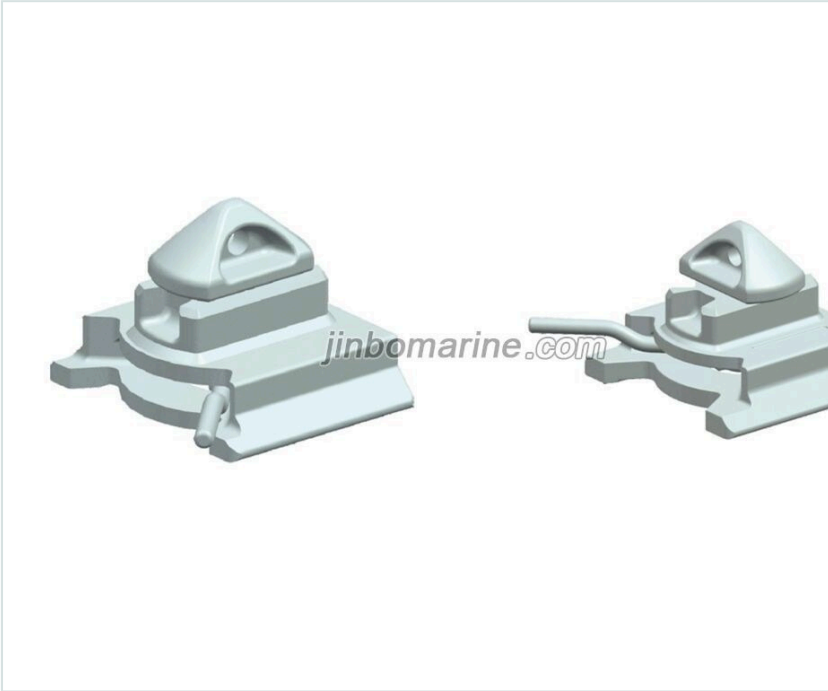

Key Highlights	
Category	Twistlock
Standard	DIN
Material	Material:High tensile steel Dimensions according to requirement.
Weight / Size	Material:High tensile steel Dimensions according to requirement.
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.	

Technical Specifications			
Category	Twistlock	Model / SKU	F1-1L-Rotation-Twistlock
Standard	DIN	Material	Material:High tensile steel Dimensions according to requirement.
Weight / Size	Material:High tensile steel Dimensions according to requirement.	Surface	Hot dip galvanized
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

Specification:

Min.B.L.Tension:500KN

Min.B.L.Shear:420kN



Finish:Hot dip galvanized.

Material:High tensile stee

Dimensions accordingto requirement.